



Local Government Energy Audit Report

Central Elementary School

March 23, 2023

Prepared for:

Orange Board of Education

33 Cleveland St

Orange, New Jersey 07050

Prepared by:

TRC

317 George Street

New Brunswick, New Jersey 08901

Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities and help prioritize specific measures for implementation. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC reviewed the energy conservation measures and estimates of energy savings for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated material and labor costs primarily on RS Means cost manuals as well as on our experience at similar facilities. This approach is based on standard cost estimating manuals and is vendor neutral. Cost estimates include material and labor pricing associated with one for one equipment replacements. Cost estimates do not include demolition or removal of hazardous waste. The actual implementation costs for energy savings projects are anticipated to be significantly higher based on the specific conditions at your site(s). We strongly recommend that you work with your design engineer or contractor to develop actual project costs for your specific scope of work for the installation of high efficiency equipment. We encourage you to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on selected products and installers. TRC and NJBPU do not guarantee cost estimates and shall in no event be held liable should actual installed costs vary from these material and labor estimates.

Incentive values provided in this report are estimated based on previously run state efficiency programs. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available utility program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state, and federal requirements.

Copyright ©2023 TRC. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.

Table of Contents


1	Executive Summary.....	1
1.1	Planning Your Project	4
	Pick Your Installation Approach	4
	Options from Your Utility Company	4
	<i>Prescriptive and Custom Rebates</i>	4
	<i>Direct Install</i>	4
	<i>Engineered Solutions</i>	4
	Options from New Jersey's Clean Energy Program	5
2	Existing Conditions.....	6
2.1	Site Overview.....	6
2.2	Building Occupancy	6
2.3	Building Envelope	6
2.4	Lighting Systems	9
2.5	Air Handling Systems.....	11
	Unitary Electric HVAC Equipment	11
2.6	Heating Steam Systems	11
2.7	Domestic Hot Water	12
2.8	Food Service Equipment.....	13
2.9	Refrigeration.....	14
2.10	Plug Load and Vending Machines	15
2.11	Water-Using Systems	15
3	Energy Use and Costs	16
3.1	Electricity	18
3.2	Natural Gas	19
3.3	Benchmarking.....	20
	Tracking Your Energy Performance	21
4	Energy Conservation Measures	22
4.1	Lighting	25
	ECM 1: Install LED Fixtures	25
	ECM 2: Retrofit Fluorescent Fixtures with LED Lamps and Drivers	25
	ECM 3: Retrofit Fixtures with LED Lamps	26
4.2	Lighting Controls.....	26
	ECM 4: Install Occupancy Sensor Lighting Controls	26
	ECM 5: Install High/Low Lighting Controls	27
4.3	HVAC Improvements	27
	ECM 6: Install Pipe Insulation.....	27
4.4	Domestic Water Heating	28
	ECM 7: Install Low-Flow DHW Devices.....	28
5	Energy Efficient Best Practices	29

Energy Tracking with ENERGY STAR® Portfolio Manager®	29
Weatherization.....	29
Doors and Windows	29
Lighting Maintenance.....	30
Lighting Controls	30
Motor Maintenance	30
Fans to Reduce Cooling Load	30
Thermostat Schedules and Temperature Resets	30
Steam Trap Repair and Replacement.....	30
Boiler Maintenance	31
Water Heater Maintenance	31
Refrigeration Equipment Maintenance.....	31
Water Conservation	32
Procurement Strategies	32
6 On-site Generation	33
6.1 Solar Photovoltaic	34
6.2 Combined Heat and Power	36
7 Electric Vehicles (EV)	37
7.1 Electric Vehicle Charging	37
8 Project Funding and Incentives.....	39
8.1 Utility Energy Efficiency Programs	40
Prescriptive and Custom	40
Direct Install	40
Engineered Solutions	41
8.2 New Jersey's Clean Energy Programs.....	42
Large Energy Users.....	42
Combined Heat and Power	43
Successor Solar Incentive Program (SuSI)	44
Energy Savings Improvement Program	45
9 Project Development	46
10 Energy Purchasing and Procurement Strategies	47
10.1 Retail Electric Supply Options.....	47
10.2 Retail Natural Gas Supply Options	47
Appendix A: Equipment Inventory & Recommendations	A-1
Appendix B: ENERGY STAR® Statement of Energy Performance.....	B-1
Appendix C: Glossary	C-1

1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBP) has sponsored this Local Government Energy Audit (LGEA) report for Central Elementary School. This report provides you with information about your facility's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in your facility. TRC conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and to help protect our environment by reducing statewide energy consumption.

BUILDING PERFORMANCE REPORT

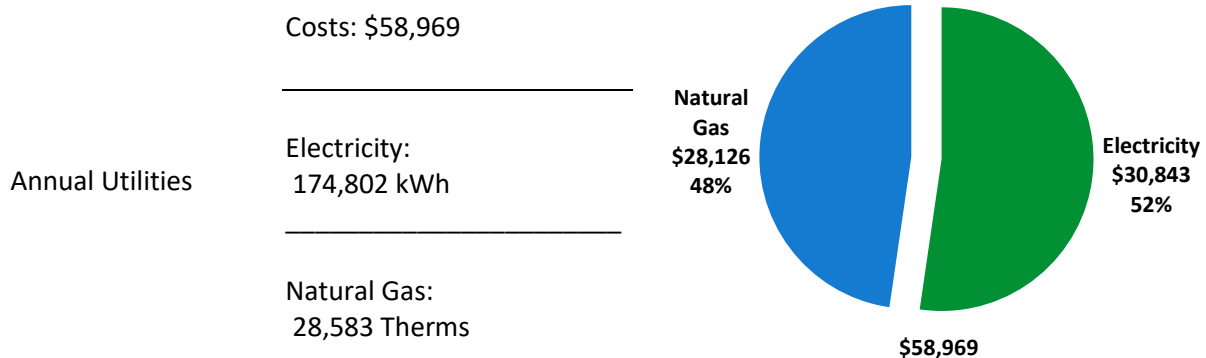

ENERGY STAR®
Benchmarking Score

67
(1-100 scale)

Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance, and lower your energy bills even more.

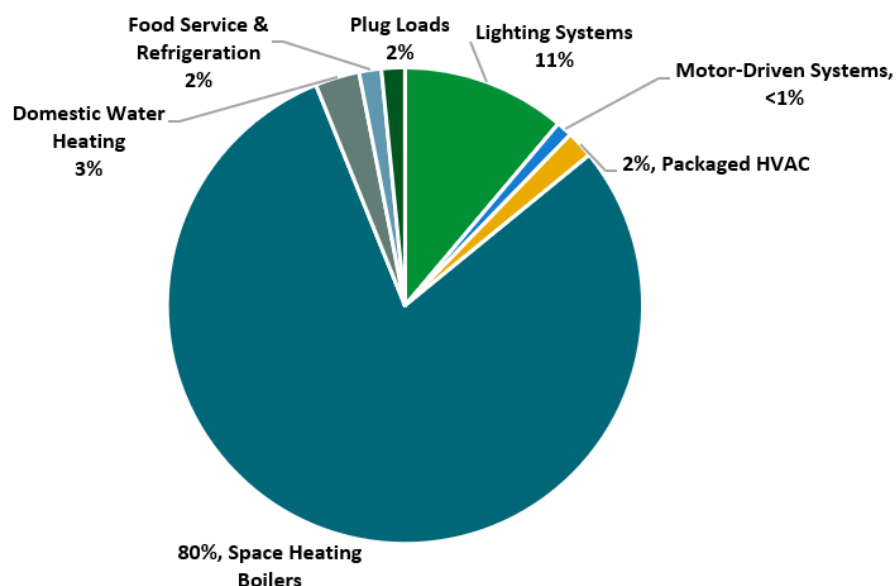


Figure 1 - Energy Use by System


POTENTIAL IMPROVEMENTS



This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.


Scenario 1: Full Package (All Evaluated Measures)

Installation Cost	\$56,702
Potential Rebates & Incentives ¹	\$13,955
Annual Cost Savings	\$14,187
Annual Energy Savings	Electricity: 80,271 kWh Natural Gas: 24 Therms
Greenhouse Gas Emission Savings	41 Tons
Simple Payback	3.0 Years
Site Energy Savings (All Utilities)	8%

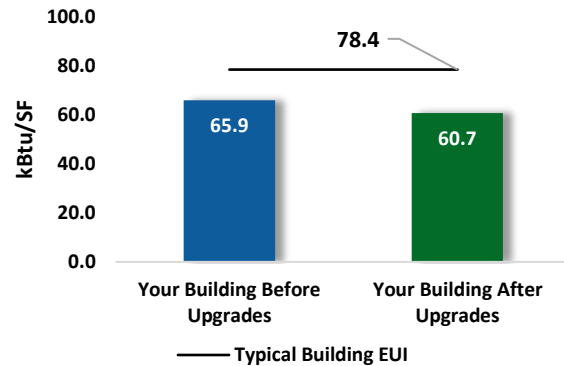

Scenario 2: Cost Effective Package²

Installation Cost	\$56,702
Potential Rebates & Incentives	\$13,955
Annual Cost Savings	\$14,187
Annual Energy Savings	Electricity: 80,271 kWh Natural Gas: 24 Therms
Greenhouse Gas Emission Savings	41 Tons
Simple Payback	3.0 Years
Site Energy Savings (all utilities)	8%

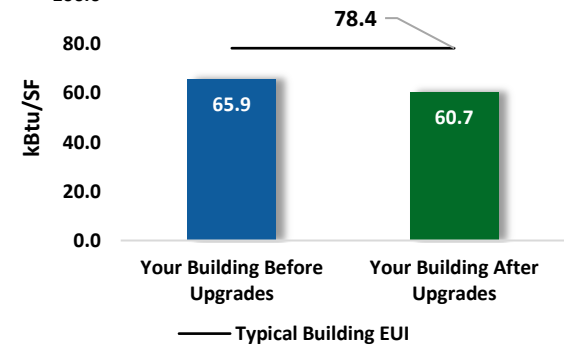

On-site Generation Potential

Photovoltaic	High
Combined Heat and Power	None

¹ Incentives are based on previously run state rebate programs. Contact your utility provider for current program incentives that may apply.

² A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.

#	Energy Conservation Measure	Cost Effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting Upgrades			61,904	18.6	-12	\$10,801	\$39,125	\$9,324	\$29,801	2.8	60,895
ECM 1	Install LED Fixtures	Yes	6,833	1.3	-1	\$1,198	\$8,401	\$950	\$7,451	6.2	6,787
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	Yes	519	0.2	0	\$91	\$237	\$40	\$197	2.2	510
ECM 3	Retrofit Fixtures with LED Lamps	Yes	54,552	17.2	-11	\$9,513	\$30,488	\$8,334	\$22,154	2.3	53,598
Lighting Control Measures			18,367	5.8	-4	\$3,203	\$17,097	\$4,510	\$12,587	3.9	18,046
ECM 4	Install Occupancy Sensor Lighting Controls	Yes	15,021	4.9	-3	\$2,619	\$11,922	\$1,605	\$10,317	3.9	14,758
ECM 5	Install High/Low Lighting Controls	Yes	3,346	0.9	-1	\$584	\$5,175	\$2,905	\$2,270	3.9	3,288
HVAC System Improvements			0	0.0	11	\$103	\$358	\$60	\$298	2.9	1,229
ECM 6	Install Pipe Insulation	Yes	0	0.0	11	\$103	\$358	\$60	\$298	2.9	1,229
Domestic Water Heating Upgrade			0	0.0	8	\$79	\$122	\$61	\$61	0.8	944
ECM 7	Install Low-Flow DHW Devices	Yes	0	0.0	8	\$79	\$122	\$61	\$61	0.8	944
TOTALS (COST EFFECTIVE MEASURES)			80,271	24.5	2	\$14,187	\$56,702	\$13,955	\$42,747	3.0	81,114
TOTALS (ALL MEASURES)			80,271	24.5	2	\$14,187	\$56,702	\$13,955	\$42,747	3.0	81,114

* - All incentives presented in this table are included as placeholders for planning purposes and are based on previously run state rebate programs. Contact your utility provider for details on current programs.

** - Simple Payback Period is based on net measure costs (i.e. after incentives).

Figure 2 – Evaluated Energy Improvements

For more detail on each evaluated energy improvement and a break out of cost-effective improvements, see **Section 4: Energy Conservation Measures**.

1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- ◆ How will the project be funded and/or financed?
- ◆ Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- ◆ Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

Utility-run energy efficiency programs and New Jersey's Clean Energy Programs, give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives before purchasing materials or starting installation.

Options from Your Utility Company

Prescriptive and Custom Rebates

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the Prescriptive and Custom Rebates program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval may be required for some incentives. Contact your utility company for more details prior to project installation.

Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized contractor. This program can provide incentives up to 70% or 80% of the cost of selected measures. A Direct Install contractor will assess and verify individual measure eligibility and perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Engineered Solutions

The Engineered Solutions program provides tailored energy-efficiency assistance and turnkey engineering services to municipalities, universities, schools, hospitals, and healthcare facilities (MUSH), non-profit entities, and multifamily buildings. The program provides all professional services from audit, design, construction administration, to commissioning and measurement and verification for custom whole-building energy-efficiency projects. Engineered Solutions allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs.

For more details on these programs please contact your utility provider.

Options from New Jersey's Clean Energy Program

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat and Power (CHP)

The CHP program provides incentives for combined heat and power (i.e., cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Successor Solar Incentive Program (SuSI)

New Jersey is committed to supporting solar energy. Solar projects help the state reach the renewable goals outlined in the state's Energy Master Plan. The SuSI program is used to register and certify solar projects in New Jersey. Rebates are not available, but certified solar projects are able to earn one SREC II (Solar Renewable Energy Certificates II) for each megawatt-hour of solar electricity produced from a qualifying solar facility.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce electric demand during times of peak demand, the grid is made more reliable, and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.

Large Energy User Program (LEUP)

LEUP is designed to promote self-investment in energy efficiency. It incentivizes owners/users of buildings to upgrade or install energy conserving measures in existing buildings to help offset the capital costs associated with the project. The efficiency upgrades are customized to meet the requirements of the customers' existing facilities, while advancing the State's energy efficiency, conservation, and greenhouse gas reduction goals.

For more details on these programs please visit [New Jersey's Clean Energy Program website](#) .



2 EXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Central Elementary School. This report provides information on how your facility uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

2.1 Site Overview

On September 30, 2022, TRC performed an energy audit at Central Elementary School located in Orange, New Jersey. TRC met with Edwin Vasquez to review the facility operations and help focus our investigation on specific energy-using systems.

Central Elementary School is a three-story, 52,400 square foot building built in 1921. Spaces include classrooms, gymnasium, auditorium, offices, cafeteria, kitchen, lounges, corridors, stairwells, restrooms, storage rooms, electrical and mechanical spaces.

Lighting for the facility is provided mainly by linear fluorescent T8 fixtures. Window air conditioning (AC) units and two boilers provide cooling and heating to spaces.

2.2 Building Occupancy

The facility is occupied year-round with a typical occupancy of 328 students and 41 staff. The building has limited use on the weekends and closes at 10:30 PM on weekdays.

Building Name	Weekday/Weekend	Operating Schedule
Central Elementary School	Weekday	6:00 AM - 10:30 PM
	Weekend	Limited Use

Figure 3 - Building Occupancy Schedule

2.3 Building Envelope

Building walls are concrete block over structural steel with a brick facade. The roof is flat, covered with pebbles over a gray membrane, and is in fair condition. The windows are a mix of single glazed and double glazed and have aluminum frames with thermal breaks. The glass-to-frame seals are in fair condition. The operable window weather seals are in fair condition, showing little evidence of excessive wear. Exterior doors have metal frames and are in fair condition with worn door seals. Degraded window and door seals increase drafts and outside air infiltration. Overall, the building envelope appears in fair condition.



Building Walls



Building Windows



Building Windows



Entrance Doors



Exit Doors



Roof

2.4 Lighting Systems

The primary interior lighting system uses 32-Watt fluorescent T8 lamps. Fixture types include 2-lamp, 3-lamp, and 4-lamp, 2-foot and 4-foot long recessed, surface mounted, and pendant fixtures with linear tube lamps.

Additionally, compact fluorescent lamps (CFL), metal halide (MH), fluorescent T12 lamps, and LED lamps are also used in some spaces. Typically, CFLs at this site use 32-Watts, MH lamps draw 150-Watts, and fluorescent T12 lamps require 40-Watts each. Typically, T8 fluorescent lamps use electronic ballasts and T12 fluorescent lamps use magnetic ballasts. Exit signs use LED sources.

Gymnasium fixtures have manually controlled high bay LED lamps. Auditorium fixtures have a mix of manually controlled MH, fluorescent T8, and LED lamps.

Interior light fixtures are controlled by manual wall switches. All light fixtures are in good condition. Interior lighting levels were generally sufficient. Exterior fixtures use LED and MH lamps. Exterior fixtures are photocell controlled.




Fluorescent T8 Fixture



Fluorescent T8 Fixture



CFL Fixture

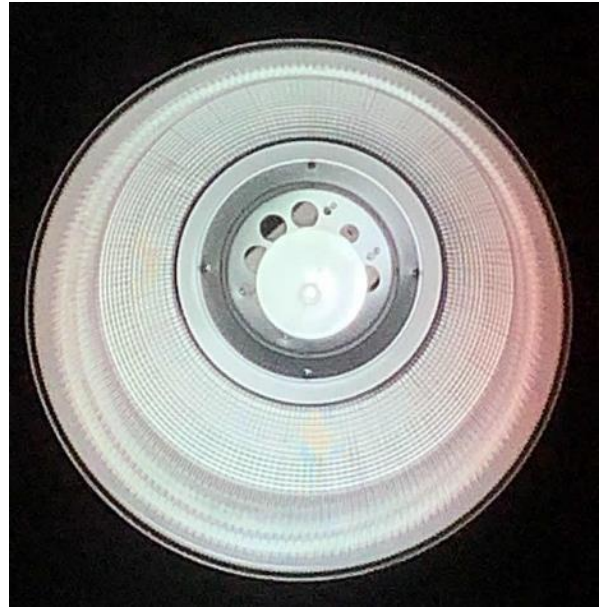

MH Fixture



Exterior LED Fixture



Exterior MH Fixture

2.5 Air Handling Systems

Unitary Electric HVAC Equipment

Areas of the building are cooled using window air conditioning (AC) units. The window ACs range in cooling capacity from 0.6 tons to 2.3 tons. Equipment efficiencies range from 9.7 EER to 12.1 EER. The units are in good condition.



Window AC Unit

2.6 Heating Steam Systems

The building's heating system consists of one Weil McLain gas-fired steam boiler with an output capacity of 3,422 MBh, and one Burnham gas-fired steam boiler with an output capacity of 3,445 MBh. The burners are fully modulating with a nominal efficiency of 80%. The boilers are configured in a lead/lag control scheme. Both boilers are required under high load conditions. Installed in 2019 and 2016, the boilers are in good condition. There is a service contract in place.

A one-pipe steam distribution system serves the building's heating terminals. The boilers provide steam to radiators throughout the building. There are two fractional boiler feed pumps in the mechanical room.



Steam Boilers

2.7 Domestic Hot Water

Hot water is produced by one, 75 MBh gas-fired storage water heater with a 75-gallon capacity. Installed in 2021, the unit is in good condition. The domestic hot water pipes are partially insulated, and the insulation is in fair condition.



Water Heater

2.8 Food Service Equipment

The kitchen has all-electric equipment that is used to prepare meals for students. Most cooking is done using a convection electric oven. Bulk prepared foods are held in an electric holding cabinet. Equipment is not high efficiency and is in fair condition.

Visit https://www.energystar.gov/products/commercial_food_service_equipment for the latest information on high efficiency food service equipment.



Electric Oven



Holding Cabinet

2.9 Refrigeration

The kitchen has one stand-up refrigerator and one stand-up freezer with solid doors. There are also three refrigerator chests. Only the freezer is high efficiency (ENERGY STAR® rated), and all in good condition.

Visit https://www.energystar.gov/products/commercial_food_service_equipment for the latest information on high efficiency food service equipment.



Stand-up Refrigerator



Stand-up Freezer

2.10 Plug Load and Vending Machines

The location is doing a great job managing the electrical plug loads. This report makes additional suggestions for ECMs in this area as well as energy efficient best practices.

There are 62 computer workstations throughout the facility. Plug loads throughout the building include general cafe and office equipment. There are classroom typical loads such as smart boards and projectors, and typical office loads such as copiers, printers, microwaves, coffee machines, and mini fridges. There is one residential-style refrigerator that is used to store food and drinks.



Copier



Residential-Style Refrigerator

2.11 Water-Using Systems

There are ten restrooms with toilets, urinals, and sinks. Faucet flow rates are at 2.2 gallons per minute (gpm) or higher.




Typical Restroom Sinks

3 ENERGY USE AND COSTS

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Utility Summary		
Fuel	Usage	Cost
Electricity	174,802 kWh	\$30,843
Natural Gas	28,583 Therms	\$28,126
Total		\$58,969

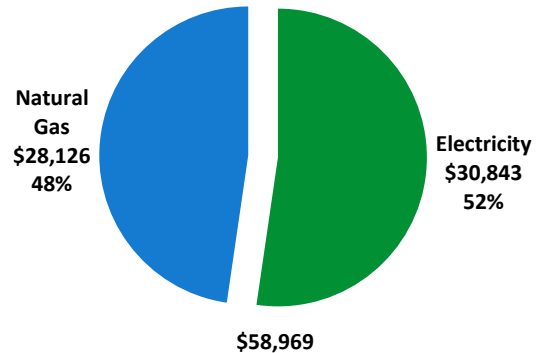

An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.


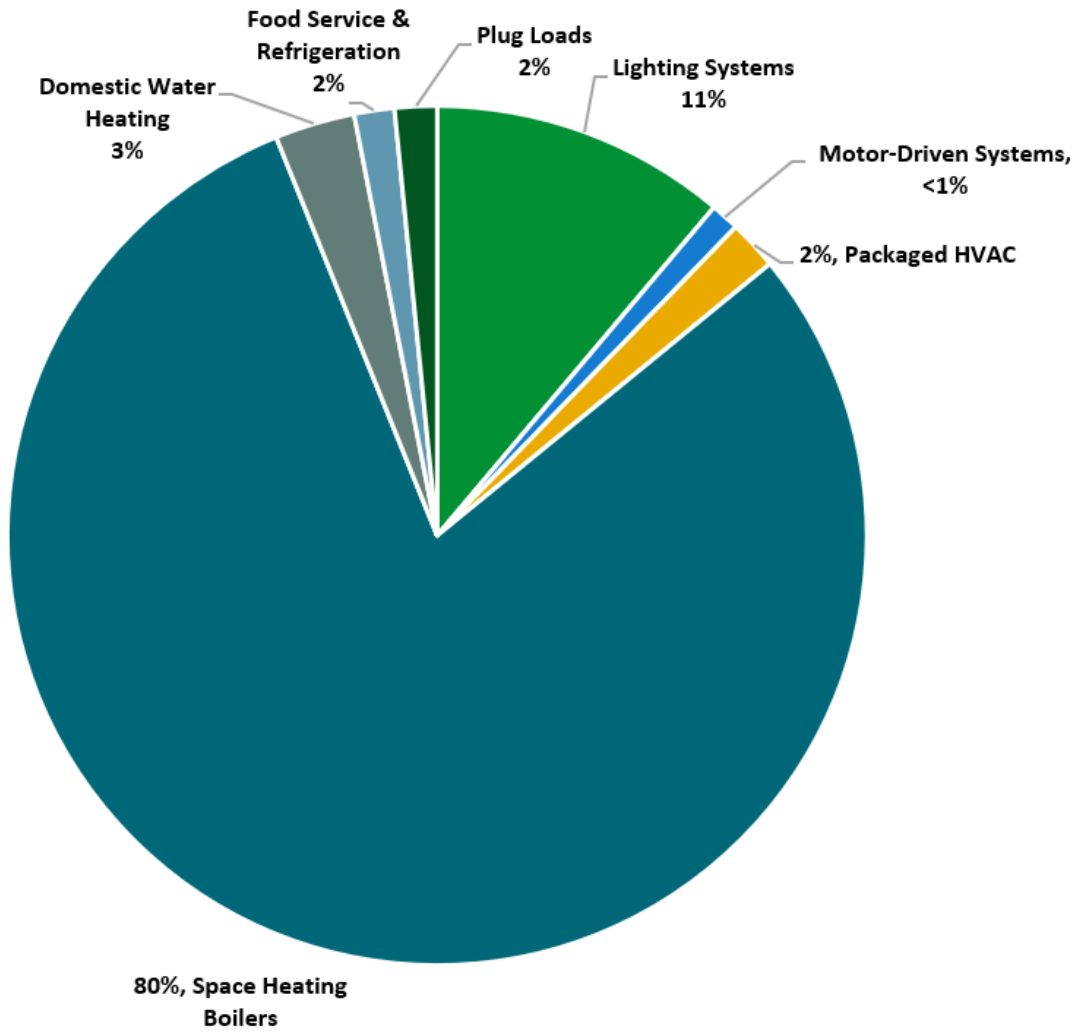


Figure 4 - Energy Balance

PSE&G delivers electricity under rate class General Light & Power (GLP).

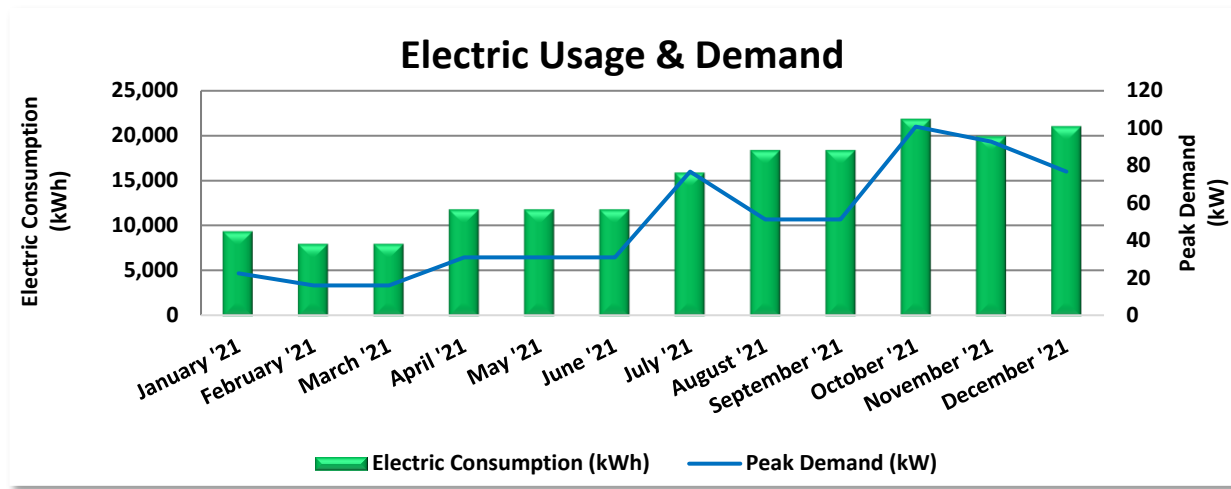


Electric Billing Data					
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost
1/21/21	34	9,360	22	\$176	\$2,188
2/19/21	29	8,000	16	\$126	\$1,882
3/22/21	31	8,000	16	\$126	\$1,882
4/21/21	30	11,787	31	\$337	\$2,322
5/20/21	29	11,787	31	\$337	\$2,322
6/21/21	32	11,787	31	\$337	\$2,322
7/21/21	30	15,840	77	\$1,066	\$3,112
8/19/21	29	18,320	51	\$1,421	\$3,565
9/20/21	32	18,320	51	\$1,421	\$3,565
10/19/21	29	21,760	101	\$399	\$2,729
11/17/21	29	19,840	93	\$367	\$2,591
12/20/21	33	20,960	77	\$304	\$2,534
Totals	367	175,760	101	\$6,416	\$31,012
Annual	365	174,802	101	\$6,381	\$30,843

Notes:

- Peak demand of 101 kW occurred in October 2021.
- Average demand over the past 12 months was 50 kW.
- The average electric cost over the past 12 months was \$0.176/kWh, which is the blended rate that includes energy supply, distribution, demand, and other charges. This report uses this blended rate to estimate energy cost savings.

3.2 Natural Gas

PSE&G delivers natural gas under rate class Large Volume Gas (LVG).

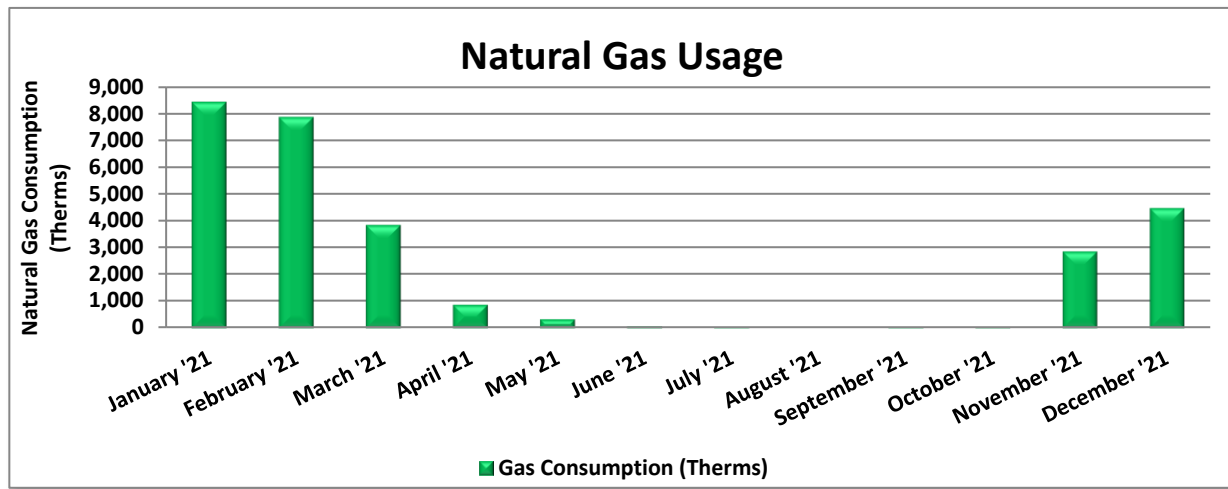

Gas Billing Data			
Period Ending	Days in Period	Natural Gas Usage (Therms)	Natural Gas Cost
1/21/21	34	8,404	\$6,527
2/19/21	29	7,849	\$6,210
3/22/21	31	3,839	\$3,625
4/22/21	31	876	\$736
5/21/21	29	335	\$378
6/21/21	31	77	\$348
7/21/21	30	4	\$318
8/20/21	30	0	\$0
9/20/21	31	18	\$329
10/19/21	29	21	\$176
11/17/21	29	2,855	\$4,035
12/20/21	33	4,460	\$5,598
Totals	367	28,740	\$28,280
Annual	365	28,583	\$28,126

Notes:

- The average gas cost for the past 12 months is \$0.984/therm, which is the blended rate used throughout the analysis.
- Summer gas consumption can be attributed to domestic hot water usage.

3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager*® software. Benchmarking compares your building's energy use to that of similar buildings across the country, while neutralizing variations due to location, occupancy, and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR® benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

Benchmarking Score	67
---------------------------	-----------

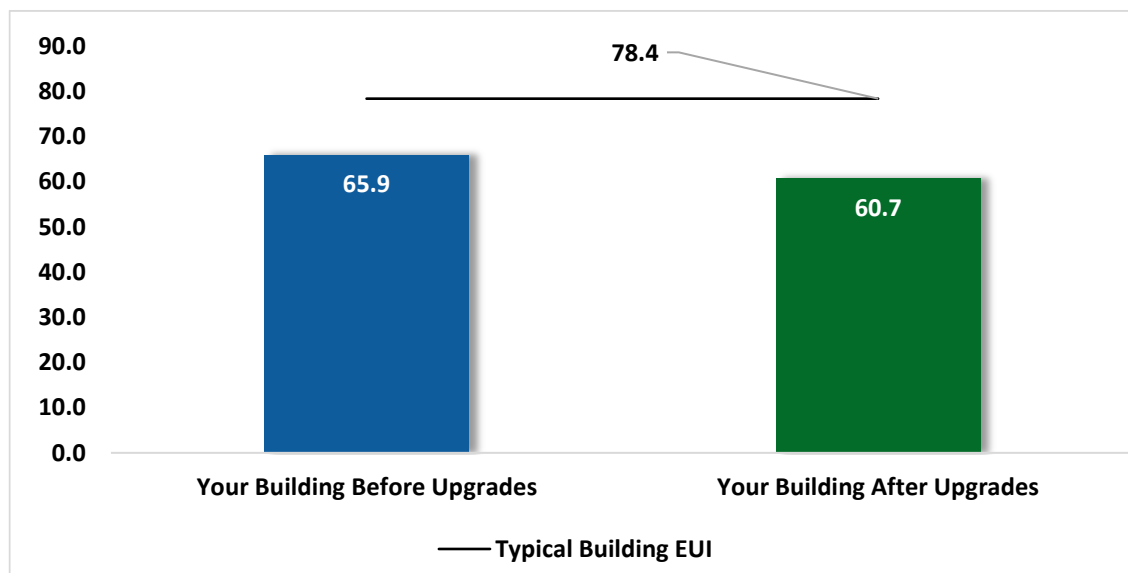


Figure 5 - Energy Use Intensity Comparison³

Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance, and lower your energy bills even more.

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. Several factors can cause a building to vary from typical energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.

³ Based on all evaluated ECMs



Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager® regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager® account for your facility and have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR® Portfolio Manager® to track your building's performance at: <https://www.energystar.gov/buildings/training>.

For more information on ENERGY STAR® and Portfolio Manager®, visit their [website](#).

4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements and provide information about the cost effectiveness of those improvements. Most energy conservation measures have received preliminary analysis of feasibility, which identifies expected ranges of savings. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives in this report are based on the previously run state rebate program SmartStart, which has been retired. Now, all investor-owned gas and electric utility companies are offering complementary energy efficiency programs directly to their customers. Some measures and proposed upgrades may be eligible for higher incentives than those shown below. The incentives in the summary tables should be used for high-level planning purposes. To verify incentives, reach out to your utility provider or visit the [NJCEP website](#) for more information.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see Appendix A: Equipment Inventory & Recommendations.

#	Energy Conservation Measure	Cost Effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting Upgrades			61,904	18.6	-12	\$10,801	\$39,125	\$9,324	\$29,801	2.8	60,895
ECM 1	Install LED Fixtures	Yes	6,833	1.3	-1	\$1,198	\$8,401	\$950	\$7,451	6.2	6,787
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	Yes	519	0.2	0	\$91	\$237	\$40	\$197	2.2	510
ECM 3	Retrofit Fixtures with LED Lamps	Yes	54,552	17.2	-11	\$9,513	\$30,488	\$8,334	\$22,154	2.3	53,598
Lighting Control Measures			18,367	5.8	-4	\$3,203	\$17,097	\$4,510	\$12,587	3.9	18,046
ECM 4	Install Occupancy Sensor Lighting Controls	Yes	15,021	4.9	-3	\$2,619	\$11,922	\$1,605	\$10,317	3.9	14,758
ECM 5	Install High/Low Lighting Controls	Yes	3,346	0.9	-1	\$584	\$5,175	\$2,905	\$2,270	3.9	3,288
HVAC System Improvements			0	0.0	11	\$103	\$358	\$60	\$298	2.9	1,229
ECM 6	Install Pipe Insulation	Yes	0	0.0	11	\$103	\$358	\$60	\$298	2.9	1,229
Domestic Water Heating Upgrade			0	0.0	8	\$79	\$122	\$61	\$61	0.8	944
ECM 7	Install Low-Flow DHW Devices	Yes	0	0.0	8	\$79	\$122	\$61	\$61	0.8	944
TOTALS			80,271	24.5	2	\$14,187	\$56,702	\$13,955	\$42,747	3.0	81,114

* - All incentives presented in this table are included as placeholders for planning purposes and are based on previously run state rebate programs. Contact your utility provider for details on current programs.

** - Simple Payback Period is based on net measure costs (i.e. after incentives).

Figure 6 – All Evaluated ECMs

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting Upgrades		61,904	18.6	-12	\$10,801	\$39,125	\$9,324	\$29,801	2.8	60,895
ECM 1	Install LED Fixtures	6,833	1.3	-1	\$1,198	\$8,401	\$950	\$7,451	6.2	6,787
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	519	0.2	0	\$91	\$237	\$40	\$197	2.2	510
ECM 3	Retrofit Fixtures with LED Lamps	54,552	17.2	-11	\$9,513	\$30,488	\$8,334	\$22,154	2.3	53,598
Lighting Control Measures		18,367	5.8	-4	\$3,203	\$17,097	\$4,510	\$12,587	3.9	18,046
ECM 4	Install Occupancy Sensor Lighting Controls	15,021	4.9	-3	\$2,619	\$11,922	\$1,605	\$10,317	3.9	14,758
ECM 5	Install High/Low Lighting Controls	3,346	0.9	-1	\$584	\$5,175	\$2,905	\$2,270	3.9	3,288
HVAC System Improvements		0	0.0	11	\$103	\$358	\$60	\$298	2.9	1,229
ECM 6	Install Pipe Insulation	0	0.0	11	\$103	\$358	\$60	\$298	2.9	1,229
Domestic Water Heating Upgrade		0	0.0	8	\$79	\$122	\$61	\$61	0.8	944
ECM 7	Install Low-Flow DHW Devices	0	0.0	8	\$79	\$122	\$61	\$61	0.8	944
TOTALS		80,271	24.5	2	\$14,187	\$56,702	\$13,955	\$42,747	3.0	81,114

* - All incentives presented in this table are included as placeholders for planning purposes and are based on previously run state rebate programs. Contact your utility provider for details on current programs.

** - Simple Payback Period is based on net measure costs (i.e. after incentives).

Figure 7 – Cost Effective ECMs

4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting Upgrades		61,904	18.6	-12	\$10,801	\$39,125	\$9,324	\$29,801	2.8	60,895
ECM 1	Install LED Fixtures	6,833	1.3	-1	\$1,198	\$8,401	\$950	\$7,451	6.2	6,787
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	519	0.2	0	\$91	\$237	\$40	\$197	2.2	510
ECM 3	Retrofit Fixtures with LED Lamps	54,552	17.2	-11	\$9,513	\$30,488	\$8,334	\$22,154	2.3	53,598

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources is proposed, we suggest converting all of a specific lighting type (e.g., linear fluorescent) to LED lamps to minimize the number of lamp types in use at the facility, which should help reduce future maintenance costs.

ECM 1: Install LED Fixtures

Replace existing fixtures containing high-intensity discharge (HID) lamps with new LED light fixtures. This measure saves energy by installing LEDs, which use less power than other technologies with a comparable light output.

In some cases, HID fixtures can be retrofit with screw-based LED lamps. Replacing an existing HID fixture with a new LED fixture will generally provide better overall lighting optics; however, replacing the HID lamp with a LED screw-in lamp is typically a less expensive retrofit. We recommend you work with your lighting contractor to determine which retrofit solution is best suited to your needs and will be compatible with the existing fixtures.

Maintenance savings may also be achieved since LED lamps last longer than other light sources and therefore do not need to be replaced as often.

Affected Building Areas: exterior metal halide fixtures.

ECM 2: Retrofit Fluorescent Fixtures with LED Lamps and Drivers

Retrofit fluorescent fixtures by removing the fluorescent tubes and ballasts and replacing them with LED tubes and LED drivers (if necessary), which are designed to be used in retrofitted fluorescent fixtures.

The measure uses the existing fixture housing but replaces the electric components with more efficient lighting technology, which use less power than other lighting technologies but provides equivalent lighting output. Maintenance savings may also be achieved since LED tubes last longer than fluorescent tubes and, therefore, do not need to be replaced as often.

Affected Building Areas: fluorescent fixtures with T12 tubes in the first floor lounge.

ECM 3: Retrofit Fixtures with LED Lamps

Replace fluorescent and CFL lamps with LED lamps. Many LED tubes are direct replacements for existing fluorescent tubes and can be installed while leaving the fluorescent fixture ballast in place. LED lamps can be used in existing fixtures as a direct replacement for most other lighting technologies. Be sure to specify replacement lamps that are compatible with existing dimming controls, where applicable. In some circumstances, you may need to upgrade your dimming system for optimum performance.

This measure saves energy by installing LEDs, which use less power than other lighting technologies yet provide equivalent lighting output for the space. Maintenance savings may also be available, as longer-lasting LEDs lamps will not need to be replaced as often as the existing lamps.

Affected Building Areas: all areas with CFL lamps, and fluorescent fixtures with T8 tubes.

4.2 Lighting Controls

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting Control Measures		18,367	5.8	-4	\$3,203	\$17,097	\$4,510	\$12,587	3.9	18,046
ECM 4	Install Occupancy Sensor Lighting Controls	15,021	4.9	-3	\$2,619	\$11,922	\$1,605	\$10,317	3.9	14,758
ECM 5	Install High/Low Lighting Controls	3,346	0.9	-1	\$584	\$5,175	\$2,905	\$2,270	3.9	3,288

Lighting controls reduce energy use by turning off or lowering lighting fixture power levels when not in use. A comprehensive approach to lighting design should upgrade the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.

ECM 4: Install Occupancy Sensor Lighting Controls

Install occupancy sensors to control lighting fixtures in areas that are frequently unoccupied, even for short periods. For most spaces, we recommend that lighting controls use dual technology sensors, which reduce the possibility of lights turning off unexpectedly.

Occupancy sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Most occupancy sensor lighting controls allow users to manually turn fixtures on/off, as needed. Some controls can also provide dimming options.

Occupancy sensors can be mounted on the wall at existing switch locations, mounted on the ceiling, or in remote locations. In general, wall switch replacement sensors are best suited to single occupant offices and other small rooms. Ceiling-mounted or remote mounted sensors are used in large spaces, locations without local switching, and where wall switches are not in the line-of-sight of the main work area.

This measure provides energy savings by reducing the lighting operating hours.

Affected Building Areas: classrooms, offices, lounges, auditorium, gymnasium, cafeteria, kitchen, restrooms, and storage rooms.

ECM 5: Install High/Low Lighting Controls

Install occupancy sensors to provide dual level lighting control for lighting fixtures in spaces that are infrequently occupied but may require some level of continuous lighting for safety or security reasons.

Lighting fixtures with these controls operate at default low levels when the area is unoccupied to provide minimal lighting to meet security or safety code requirements for egress. Sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Fixtures automatically switch back to low level after a predefined period of vacancy. In parking lots and parking garages with significant ambient lighting, this control can sometimes be combined with photocell controls to turn the lights off when there is sufficient daylight.

The controller lowers the light level by dimming the fixture output. Therefore, the controlled fixtures need to have a dimmable ballast or driver. This will need to be considered when selecting retrofit lamps and bulbs for the areas proposed for high/low control.

For this type of measure the occupancy sensors will generally be ceiling or fixture mounted. Sufficient sensor coverage must be provided to ensure that lights turn on in each area as occupants approach the area.

This measure provides energy savings by reducing the light fixture power draw when reduced light output is appropriate.

Affected Building Areas: hallways and stairwells.

4.3 HVAC Improvements

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
HVAC System Improvements		0	0.0	11	\$103	\$358	\$60	\$298	2.9	1,229
ECM 6	Install Pipe Insulation	0	0.0	11	\$103	\$358	\$60	\$298	2.9	1,229

ECM 6: Install Pipe Insulation

Install insulation on domestic hot water system piping. Distribution system losses are dependent on system fluid temperature, the size of the distribution system, and the level of insulation of the piping. Significant energy savings can be achieved when insulation has not been well maintained. When the insulation is exposed to water, when the insulation has been removed from some areas of the pipe, or when valves have not been properly insulated system efficiency can be significantly reduced. This measure saves energy by reducing heat transfer in the distribution system.

Affected Systems: domestic hot water piping; see Appendix A for details.

4.4 Domestic Water Heating

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Domestic Water Heating Upgrade		0	0.0	8	\$79	\$122	\$61	\$61	0.8	944
ECM 7	Install Low-Flow DHW Devices	0	0.0	8	\$79	\$122	\$61	\$61	0.8	944

ECM 7: Install Low-Flow DHW Devices

Install low-flow devices to reduce overall hot water demand. The following low-flow devices are recommended to reduce hot water usage:

Device	Flow Rate
Faucet aerators (lavatory)	0.5 gpm
Faucet aerator (kitchen)	1.5 gpm
Showerhead	2.0 gpm
Pre-rinse spray valve (kitchen)	1.28 gpm

Low-flow devices reduce the overall water flow from the fixture, while still providing adequate pressure for washing. Additional cost savings may result from reduced water usage.

5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs.

Operation and maintenance (O&M) plans enhance the operational efficiency of HVAC and other energy intensive systems and could save 5%–20% of the energy usage in your building without substantial capital investment. A successful plan includes your records of energy usage trends and costs, building equipment lists, current maintenance practices, and planned capital upgrades, and it incorporates your ideas for improved building operation. Your plan will address goals for energy-efficient operation, provide detail on how to reach the goals, and outline procedures for measuring and reporting whether goals have been achieved.

You may already be doing some of these things—see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR® Portfolio Manager®



You've heard it before—you cannot manage what you do not measure. ENERGY STAR® Portfolio Manager® is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions⁴. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

Weatherization

Caulk or weather strip leaky doors and windows to reduce drafts and loss of heated or cooled air. Sealing cracks and openings can reduce heating and cooling costs, improve building durability, and create a healthier indoor environment. Materials used may include caulk, polyurethane foam, and other weather-stripping materials. There is an energy savings opportunity by reducing the uncontrolled air exchange between the outside and inside of the building. Blower door assisted comprehensive building air sealing will reduce the amount of air exchange, which will in turn reduce the load on the buildings heating and cooling equipment, providing energy savings and increased occupant comfort.

Doors and Windows

Close exterior doors and windows in heated and cooled areas. Leaving doors and windows open leads to a loss of heat during the winter and chilled air during the summer. Reducing air changes per hour can lead to increased occupant comfort as well as heating and cooling savings, especially when combined with proper HVAC controls and adequate ventilation.

⁴ <https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager>.

Lighting Maintenance



- Clean lamps, reflectors and lenses of dirt, dust, oil, and smoke buildup every six to twelve months. Light levels decrease over time due to lamp aging, lamp and ballast failure, and buildup of dirt and dust. Together, this can reduce total light output by up to 60% while still drawing full power.
- In addition to routine cleaning, developing a maintenance schedule can ensure that maintenance is performed regularly, and it can reduce the overall cost of fixture re-lamping and re-ballasting. Group re-lamping and re-ballasting maintains lighting levels and minimizes the number of site visits by a lighting technician or contractor, decreasing the overall cost of maintenance.

Lighting Controls

As part of a lighting maintenance schedule, test lighting controls to ensure proper functioning. For occupancy sensors, this requires triggering the sensor and verifying that the sensor's timer settings are correct. For daylight and photocell sensors, maintenance involves cleaning sensor lenses and confirming that setpoints and sensitivity are configured properly. Adjust exterior lighting time clock controls seasonally as needed to match your lighting requirements.

Motor Maintenance

Motors have many moving parts. As these parts degrade over time, the efficiency of the motor is reduced. Routine maintenance prevents damage to motor components. Routine maintenance should include cleaning surfaces and ventilation openings on motors to prevent overheating, lubricating moving parts to reduce friction, inspecting belts and pulleys for wear and to ensure they are at proper alignment and tension, and cleaning and lubricating bearings. Consult a licensed technician to assess these and other motor maintenance strategies.

Fans to Reduce Cooling Load

Install ceiling fans to supplement your cooling system. Thermostat settings can typically be increased by 4°F with no change in overall occupant comfort due to the wind chill effect of moving air.

Thermostat Schedules and Temperature Resets



Use thermostat setback temperatures and schedules to reduce heating and cooling energy use during periods of low or no occupancy. Thermostats should be programmed for a setback of 5°F-10°F during low occupancy hours (reduce heating setpoints and increase cooling setpoints). Cooling load can be reduced by increasing the facility's occupied setpoint temperature. In general, during the cooling season, thermostats should be set as high as possible without sacrificing occupant comfort.

Steam Trap Repair and Replacement

Steam traps are a crucial part of delivering heat from the boiler to the space heating units. Steam traps are automatic valves that remove condensate from the system. If the traps fail closed, condensate can build up in the steam supply side of the trap, which reduces the flow in the steam lines and thermal capacity of the radiators. Or they may fail open, allowing steam into the condensate return lines resulting in wasted energy, water, and hammering. Losses can be significantly reduced by testing and replacing equipment as they start to fail. Repair or replace traps that are blocked or allowing steam to pass. Inspect steam traps as part of a regular steam system maintenance plan.

Boiler Maintenance

Many boiler problems develop slowly over time, so regular inspection and maintenance is essential to keeping the heating system running efficiently and preventing expensive repairs. Annual tune-ups should include a combustion analysis to analyze the exhaust from the boilers and to ensure the boiler is operating safely and efficiently. Boilers should be cleaned according to the manufacturer's instructions to remove soot and scale from the boiler sections to improve heat transfer.

Water Heater Maintenance

The lower the supply water temperature that is used for hand washing sinks, the less energy is needed to heat the water. Reducing the temperature results in energy savings and the change is often unnoticeable to users. Be sure to review the domestic water temperature requirements for sterilizers and dishwashers as you investigate reducing the supply water temperature.

Also, preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.
- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.

Refrigeration Equipment Maintenance

Preventative maintenance keeps commercial refrigeration equipment running reliably and efficiently. Commercial refrigerators and freezers are mission-critical equipment that can cost a fortune when they go down. Even when they appear to be working properly, refrigeration units can be consuming too much energy. Have walk-in refrigeration and freezer and other commercial systems serviced at least annually. This practice will allow systems to perform to their highest capabilities and will help identify system issues if they exist.

Maintaining your commercial refrigeration equipment can save between five and ten percent on energy costs. When condenser coils are dirty, your commercial refrigerators and freezers work harder to maintain the temperature inside. Worn gaskets, hinges, door handles, or faulty seals cause cold air to leak from the unit, forcing the unit to run longer and use more electricity.

Regular cleaning and maintenance also help your commercial refrigeration equipment to last longer.

Water Conservation



Installing dual flush or low-flow toilets and low-flow/waterless urinals are ways to reduce water use. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and for flush valve toilets is 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

For more information regarding water conservation go to the EPA's WaterSense™ website⁵ or download a copy of EPA's "WaterSense™ at Work: Best Management Practices for Commercial and Institutional Facilities"⁶ to get ideas for creating a water management plan and best practices for a wide range of water using systems.

Water conservation devices that do not reduce hot water consumption will not provide energy savings at the site level, but they may significantly affect your water and sewer usage costs. Any reduction in water use does however ultimately reduce grid-level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users.

If the facility has detached buildings with a master water meter for the entire campus, check for unnatural wet areas in the lawn or water seeping in the foundation at water pipe penetrations through the foundation. Periodically check overnight meter readings when the facility is unoccupied, and there is no other scheduled water usage.

Manage irrigation systems to use water more effectively outside the building. Adjust spray patterns so that water lands on intended lawns and plantings and not on pavement and walls. Consider installing an evapotranspiration irrigation controller that will prevent over-watering.

Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR® or WaterSense™ products where available.

⁵ <https://www.epa.gov/watersense>.

⁶ <https://www.epa.gov/watersense/watersense-work-0>.

6 ON-SITE GENERATION

You don't have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the facility's electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions, and reduced customer electricity purchases, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a cost-effective solution for your facility. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.

6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has high potential for installing a PV array.

The amount of free area, ease of installation (location), and the lack of shading elements contribute to the high potential. A PV array located on the roof may be feasible. If you are interested in pursuing the installation of PV, we recommend conducting a full feasibility study.

The graphic below displays the results of the PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

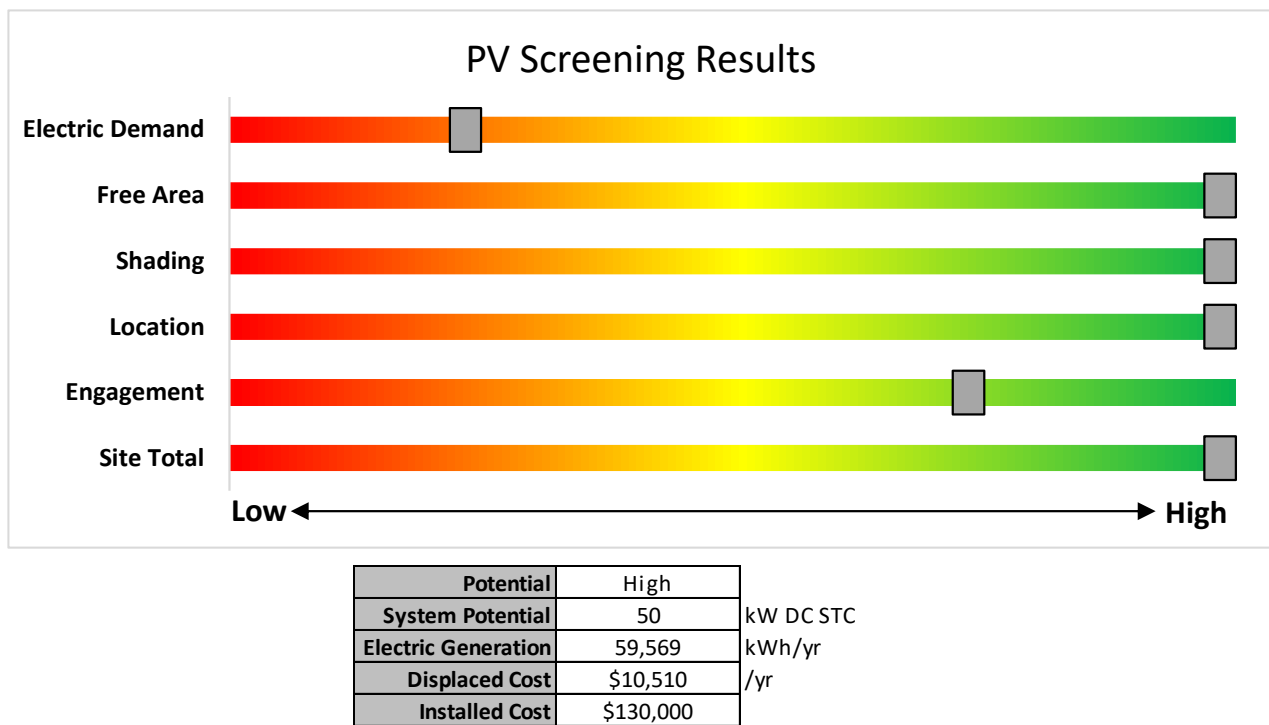


Figure 8 - Photovoltaic Screening

Successor Solar Incentive Program (SuSI)

The SuSI program replaces the SREC Registration Program (SRP) and the Transition Incentive (TI) program. The SuSI program is used to register and certify solar projects in New Jersey. Rebates are not available for solar projects. Solar projects may qualify to earn SREC- IIs (Solar Renewable Energy Certificates-II), however, the project owners *must* register their solar projects prior to the start of construction to establish the project's eligibility.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

Successor Solar Incentive Program (SuSI): <https://www.njcleanenergy.com/renewable-energy/programs/susi-program>

- **Basic Info on Solar PV in NJ:** www.njcleanenergy.com/whysolar
- **NJ Solar Market FAQs:** www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs.
- **Approved Solar Installers in the NJ Market:** www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1.

6.2 Combined Heat and Power

Combined heat and power (CHP) generates electricity at the facility and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.

CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has no potential for installing a cost-effective CHP system.

Based on a preliminary analysis, the facility does not appear to meet the minimum requirements for a cost-effective CHP installation. The lack of gas service, low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

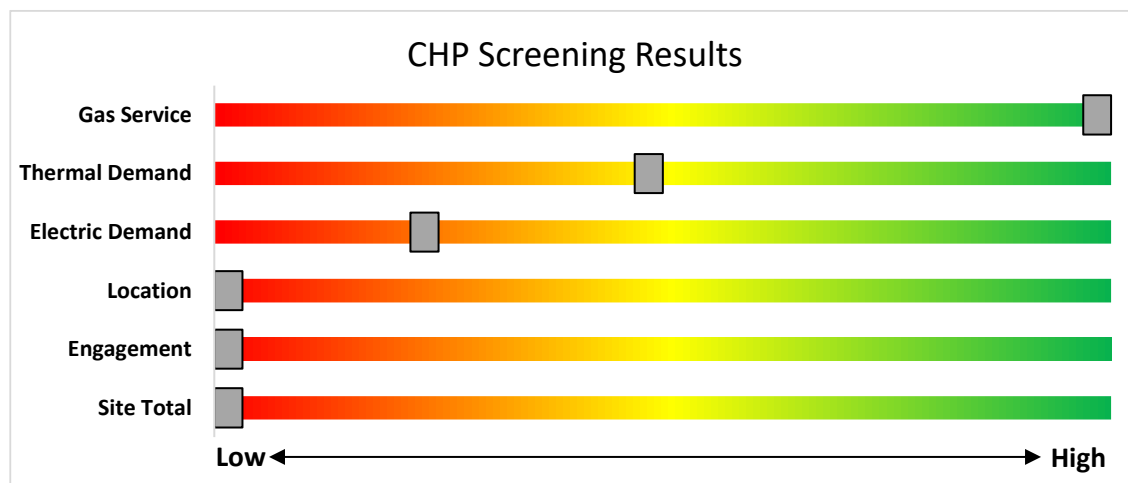


Figure 9 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation:
http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/.

7 ELECTRIC VEHICLES (EV)

All electric vehicles (EVs) have an electric motor instead of an internal combustion engine. EVs function by plugging into a charge point, taking electricity from the grid, and then storing it in rechargeable batteries. Although electricity production may contribute to air pollution, the U.S. EPA categorizes all-electric vehicles as zero-emission vehicles because they produce no direct exhaust or tailpipe emissions.

EVs are typically more expensive than similar conventional and hybrid vehicles, although some cost can be recovered through fuel savings, federal tax credit, or state incentives.

7.1 Electric Vehicle Charging

EV charging stations provide a means for electric vehicle operators to recharge their batteries at a facility. While many EV drivers charge at home, others do not have access to regular home charging, and the ability to charge at work or in public locations is critical to making EVs practical for more drivers. Charging can also be used for electric fleet vehicles, which can reduce fuel and maintenance costs for fleets that replace gas or diesel vehicles with EVs.

EV charging comes in three main types. For this assessment, the screening considers addition of Level 2 charging, which is most common at workplaces and other public locations. Depending on the site type and usage, other levels of charging power may be more appropriate.

The preliminary assessment of EV charging at the facility shows that there is medium potential for adding EV chargers to the facility's parking, based on potential costs of installation and other site factors.

The primary costs associated with installing EV charging are the charger hardware and the cost to extend power from the facility to parking spaces. This may include upgrades to electric panels to serve increased loads.

The type and size of the parking area impact the costs and feasibility of adding EV charging. Parking structure installations can be less costly than surface lot installations as power may be readily available, and equipment and wiring can be surface mounted. Parking lot installations often require trenching through concrete or asphalt surface. Large parking areas provide greater flexibility in charger siting than smaller lots.

The location and capacity of facility electric panels also impact charger installation costs. A Level 2 charger generally requires a dedicated 208-240V, 40 Amp circuit. The electric panel nearest the planned installation may not have available capacity and may need to be upgraded to serve new EV charging loads. Alternatively, chargers could be powered from a more distant panel. The distance from the panel to the location of charging stations ties directly to costs, as conduits, cables, and potential trenching costs all increase on a per-foot basis. The more charging stations planned, the more likely it is that additional electrical capacity will be needed.

Other factors to consider when planning for EV charging at a facility include who the intended users are, how long they park vehicles at the site, and whether they will need to pay for the electricity they use.



The graphic below displays the results of the EV charging assessment conducted as part of this audit. The position of each slider indicates the impact each factor has on the feasibility of installing EV charging at the site.

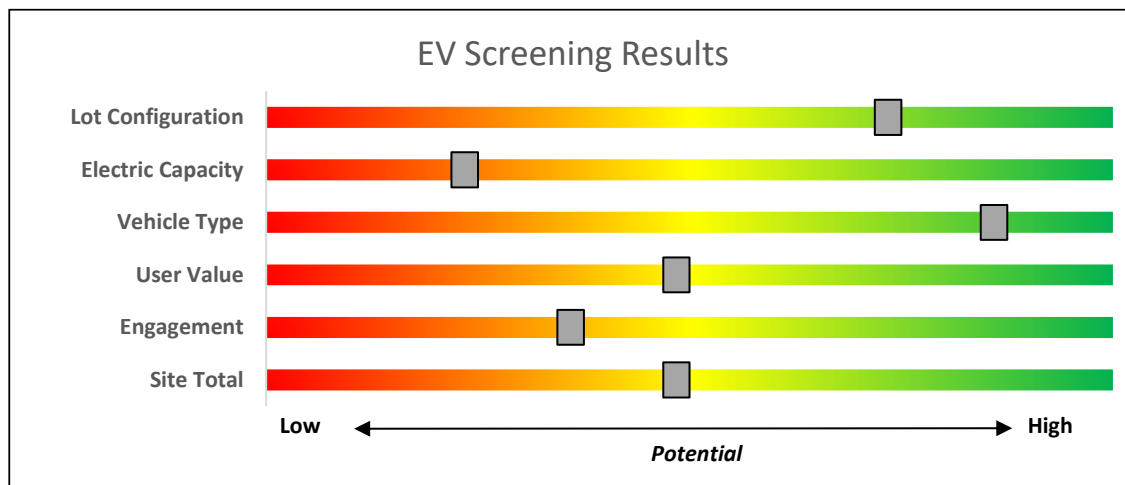


Figure 10 – EV Charger Screening

Electric Vehicle Programs Available

New Jersey is leading the way on electric vehicle (EV) adoption on the East Coast. There are several programs designed to encourage EV adoption in New Jersey, which is crucial to reaching a 100% clean energy future.

NJCEP offers a variety of EV programs for vehicles, charging stations, and fleets. Certain EV charging stations that receive electric utility service from Atlantic City Electric Company (ACE) or Public Service Electric & Gas Company (PSE&G), may be eligible for additional electric vehicle charging incentives directly from the utility. Projects may be eligible for both the incentives offered by this BPU program and incentives offered by ACE or PSE&G, up to 90% of the combined charger purchase and installation costs. Please check ACE or PSE&G program eligibility requirements before purchasing EV charging equipment, as additional conditions on types of eligible chargers may apply for utility incentives.

Both Jersey Central Power & Light (JCP&L) and Rockland Electric (RECO) have filed proposals for EV charging programs. BPU staff is currently reviewing those proposals.

For more information and to keep up to date on all EV programs please visit <https://www.njcleanenergy.com/commercial-industrial/programs/electric-vehicle-programs>.

8 PROJECT FUNDING AND INCENTIVES

Ready to improve your building's performance? New Jersey's Clean Energy Programs and Utility Energy Efficiency Programs can help. Pick the program that works best for you. This section provides an overview of currently available incentive programs in.



Program areas to be served by the Utilities:

- Existing Buildings (residential, commercial, industrial, government)
- Efficient Products
 - HVAC
 - Appliance Rebates
 - Appliance Recycling

Proposed New Programs & Features:

- Dedicated multi-family program
- More financing options
- Quick home energy check-ups



Program areas staying with NJCEP:

- New Construction (residential, commercial, industrial, government)
- Large Energy Users
- Combined Heat & Power & Fuel Cells
- State Facilities
- Local Government Energy Audits
- Energy Savings Improvement Program
- Solar & Community Solar

8.1 Utility Energy Efficiency Programs

The Clean Energy Act, signed into law by Governor Murphy in 2018, requires New Jersey's investor-owned gas and electric utilities to reduce their customers' use by set percentages over time. To help reach these targets the New Jersey Board of Public Utilities approved a comprehensive suite of energy efficiency programs to be run by the utility companies.

Prescriptive and Custom

The Prescriptive and Custom rebate program through your utility provider offers incentives for installing prescriptive and custom energy efficiency measures at your facility. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

Equipment Examples

Lighting

Lighting Controls

HVAC Equipment

Refrigeration

Gas Heating

Gas Cooling

Commercial Kitchen Equipment

Food Service Equipment

Variable Frequency Drives

Electronically Commutate Motors

Variable Frequency Drives

Plug Loads Controls

Washers and Dryers

Agricultural

Water Heating

The Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type. The Custom program provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives.

Direct Install

Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW or less over the recent 12-month period. You work directly with a pre-approved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives, and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures.

How to Participate

To participate in Direct Install, you will work with a participating contractor. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the Direct Install program, subject to program rules and eligibility, while the remaining percent of the cost is paid to the contractor by the customer.

Engineered Solutions

The Engineered Solutions Program provides tailored energy-efficiency assistance and services to municipalities, universities, schools, hospitals and healthcare facilities (MUSH), non-profit entities, and multifamily buildings. Customers receive expert guided services, including investment-grade energy auditing, engineering design, installation assistance, construction administration, commissioning, and measurement and verification (M&V) services to support the implementation of cost-effective and comprehensive efficiency projects. Engineered Solutions is generally a good option for medium to large sized facilities with a peak demand over 200 kW looking to implement as many measures as possible under a single project to achieve deep energy savings. Engineered Solutions has an added benefit of addressing measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program loan also use this program. Incentives for this program are based on project scope and energy savings achieved.

For more information on any of these programs, contact your local utility provider or visit <https://www.njcleanenergy.com/transition>.

8.2 New Jersey's Clean Energy Programs

Save money while saving the planet! New Jersey's Clean Energy Program is a statewide program that offers incentives, programs, and services that benefit New Jersey residents, businesses, educational, non-profit, and government entities to help them save energy, money, and the environment.

Large Energy Users

The Large Energy Users Program (LEUP) is designed to foster self-directed investment in energy projects. This program is offered to New Jersey's largest energy customers that annually contribute at least \$200,000 to the NJCEP aggregate of all buildings/sites. This equates to roughly \$5 million in energy costs in the prior fiscal year.

Incentives

Incentives are based on the specifications below. The maximum incentive per entity is the lesser of:

- \$4 million
- 75% of the total project(s) cost
- 90% of total NJCEP fund contribution in previous year
- \$0.33 per projected kWh saved; \$3.75 per projected Therm saved annually

How to Participate

To participate in LEUP, you will first need submit an enrollment application. This program requires all qualified and approved applicants to submit an energy plan that outlines the proposed energy efficiency work for review and approval. Applicants may submit a Draft Energy Efficiency Plan (DEEP), or a Final Energy Efficiency Plan (FEED). Once the FEED is approved, the proposed work can begin.

Detailed program descriptions, instructions for applying, and applications can be found at www.njcleanenergy.com/LEUP.

Combined Heat and Power

The Combined Heat & Power (CHP) program provides incentives for eligible CHP or waste heat to power (WHP) projects. Eligible CHP or WHP projects must achieve an annual system efficiency of at least 65% (lower heating value, or LHV), based on total energy input and total utilized energy output. Mechanical energy may be included in the efficiency evaluation.

Incentives

Eligible Technologies	Size (Installed Rated Capacity) ¹	Incentive (\$/kW)	% of Total Cost Cap per Project ³	\$ Cap per Project ³		
Powered by non-renewable or renewable fuel source ⁴	≤500 kW	\$2,000	30-40% ²	\$2 million		
Gas Internal Combustion Engine	>500 kW - 1 MW	\$1,000				
Gas Combustion Turbine	> 1 MW - 3 MW	\$550	30%	\$3 million		
Microturbine	>3 MW	\$350				
Fuel Cells with Heat Recovery						
Waste Heat to Power*	<1 MW	\$1,000	30%	\$2 million		
	> 1MW	\$500		\$3 million		

*Waste Heat to Power: Powered by non-renewable fuel source, heat recovery or other mechanical recovery from existing equipment utilizing new electric generation equipment (e.g. steam turbine).

Check the NJCEP website for details on program availability, current incentive levels, and requirements.

How to Participate

You will work with a qualified developer or consulting firm to complete the CHP application. Once the application is approved the project can be installed. Information about the CHP program can be found at www.njcleanenergy.com/CHP.

Successor Solar Incentive Program (SuSI)

The SuSI program replaces the SREC Registration Program (SRP) and the Transition Incentive (TI) program. The program is used to register and certify solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SREC-IIs (Solar Renewable Energy Certificates-II). SuSI consists of two sub-programs. The Administratively Determined Incentive (ADI) Program and the Competitive Solar Incentive (CSI) Program.

Administratively Determined Incentive (ADI) Program

The ADI Program provides administratively set incentives for net metered residential projects, net metered non-residential projects 5 MW or less, and all community solar projects.

After the registration is accepted, construction is complete, and a complete final as-built packet has been submitted, the project is issued a New Jersey certification number, which enables it to generate New Jersey SREC- IIs.

Market Segments	Size MW dc	Incentive Value (\$/SREC II)	Public Entities Incentive Value - \$20 Adder (\$/SRECII)
Net Metered Residential	All types and sizes	\$90	N/A
Small Net Metered Non-Residential located on Rooftop, Carport, Canopy and Floating Solar	Projects smaller than 1 MW	\$100	\$120
Large Net Metered Non-Residential located on Rooftop, Carport, Canopy and Floating Solar	Projects 1 MW to 5 MW	\$90	\$110
Small Net Metered Non-Residential Ground Mount	Projects smaller than 1 MW	\$85	\$105
Large Net Metered Non-Residential Ground Mount	Projects 1 MW to 5 MW	\$80	\$100
LMI Community Solar	Up to 5 MW	\$90	N/A
Non-LMI Community Solar	Up to 5 MW	\$70	N/A
Interim Subsection (t)	All types and sizes	\$100	N/A

Eligible projects may generate SREC-IIs for 15 years following the commencement of commercial operations which is defined as permission to operate (PTO) from the Electric Distribution Company. After 15 years, projects may be eligible for a NJ Class I REC.

SREC-IIs will be purchased monthly by the SREC-II Program Administrator who will allocate the SREC-IIs to the Load Serving Entities (BGS Providers and Third-Party Suppliers) annually based on their market share of retail electricity sold during the relevant Energy Year.

The ADI Program online portal is now open to new registrations.

Competitive Solar Incentive Program

The Competitive Solar Incentive (CSI) Program will provide competitively set incentives for grid supply projects and net metered non-residential projects greater than 5MW (dc). The program is currently under development. For updates, please continue to check the [Solar Proceedings](#) page on the New Jersey's Clean Energy Program website.

Solar projects help the State of New Jersey reach renewable energy goals outlined in the state's Energy Master Plan.

If you are considering installing solar photovoltaics on your building, visit the following link for more information: <https://njcleanenergy.com/renewable-energy/programs/susi-program>.

Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities, and other public and state entities enter into contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the energy conservation measures (ECMs), ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an energy services company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program descriptions and application can be found at www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.

9 PROJECT DEVELOPMENT

Energy conservation measures (ECMs) have been identified for your site, and their energy and economic analyses are provided within this LGEA report. Note that some of the identified projects may be mutually exclusive, such as replacing equipment versus upgrading motors or controls. The next steps with project development are to set goals and create a comprehensive project plan. The graphic below provides an overview of the process flow for a typical energy efficiency or renewable energy project. We recommend implementing as many ECMs as possible prior to undertaking a feasibility study for a renewable project. The cyclical nature of this process flow demonstrates the ongoing work required to continually improve building energy efficiency over time. If your building(s) scope of work is relatively simple to implement or small in scope, the measurement and verification (M&V) step may not be required. It should be noted through a typical project cycle, there will be changes in costs based on specific scopes of work, contractor selections, design considerations, construction, etc. The estimated costs provided throughout this LGEA report demonstrate the unburdened turn-key material and labor cost only. There will be contingencies and additional costs at the time of implementation. We recommend comprehensive project planning that includes the review of multiple bids for project work, incorporates potential operations and maintenance (O&M) cost savings, and maximizes your incentive potential.

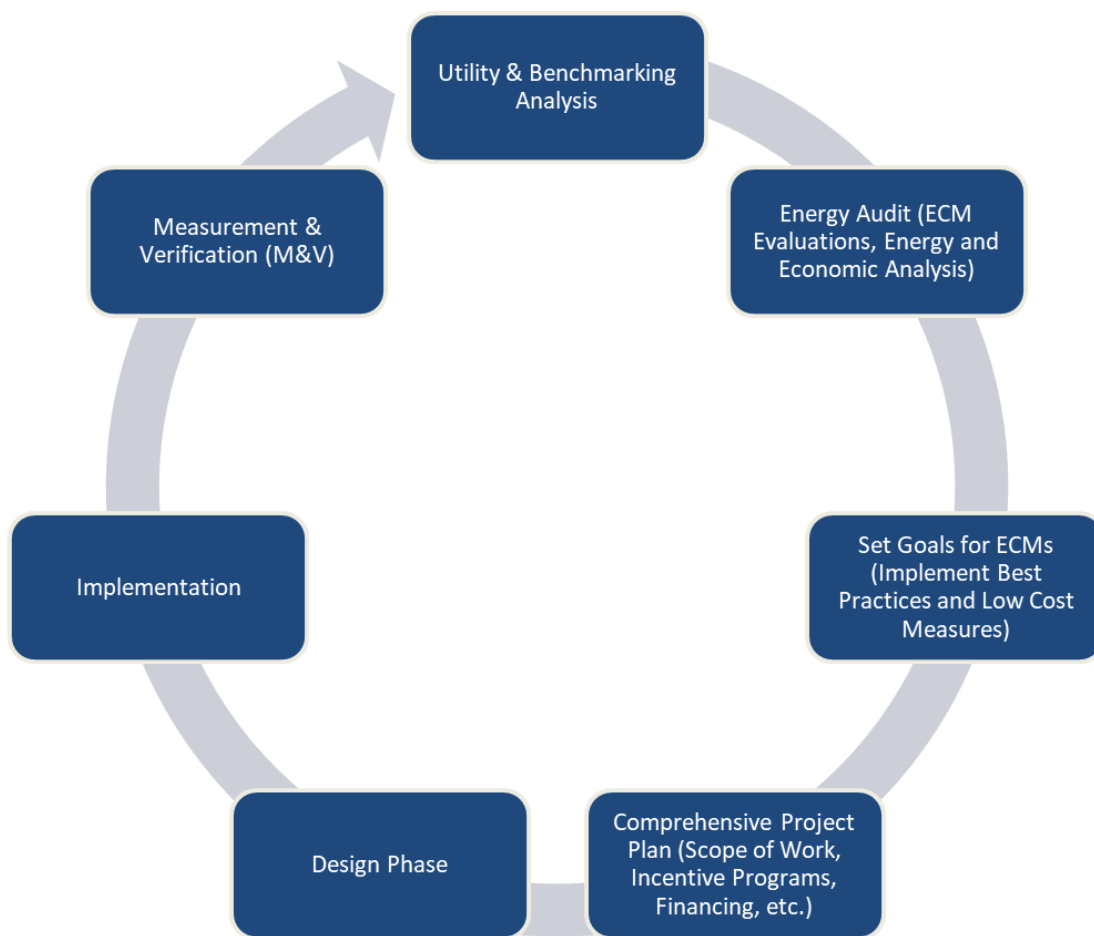


Figure 11 – Project Development Cycle

10 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

10.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. Though you may choose a different company from which to buy your electric power, responsibility for your facility's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website⁷.

10.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market based and fluctuate monthly. The utility provides basic gas supply service to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website⁸.

⁷ www.state.nj.us/bpu/commercial/shopping.html.

⁸ www.state.nj.us/bpu/commercial/shopping.html.

APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

Existing Conditions							Proposed Conditions							Energy Impact & Financial Analysis							
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Auditorium	10	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	10	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Auditorium	16	LED Lamps: (1) 9W A19 Screw-In Lamp	Wall Switch	S	9	2,000	4	None	Yes	16	LED Lamps: (1) 9W A19 Screw-In Lamp	Occupancy Sensor	9	1,380	0.0	98	0	\$17	\$540	\$70	27.4
Auditorium	18	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3, 4	Relamp	Yes	18	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	1,380	0.5	1,663	0	\$290	\$1,197	\$250	3.3
Auditorium	12	Metal Halide: (1) 150W Lamp	Wall Switch	S	190	2,000	1, 4	Fixture Replacement	Yes	12	LED - Fixtures: High-Bay	Occupancy Sensor	45	1,380	1.4	4,196	-1	\$732	\$6,832	\$635	8.5
Classroom 1	15	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	15	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.8	2,441	-1	\$426	\$1,365	\$335	2.4
Classroom 2	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 3	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 3	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 4	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 4	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 5	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 6	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 6	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 7	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 7	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 8	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 8	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Corridor 1st	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Corridor 1st	17	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,500	3, 5	Relamp	Yes	17	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	1,725	0.9	3,459	-1	\$603	\$1,917	\$935	1.6
Corridor 2nd	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Corridor 2nd	13	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,500	3, 5	Relamp	Yes	13	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	1,725	0.7	2,645	-1	\$461	\$1,624	\$715	2.0
Corridor to Rosa Parks School - 1st	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,500	3, 5	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	High/Low Control	44	1,725	0.1	346	0	\$60	\$335	\$100	3.9
Corridor to Rosa Parks School - 2nd	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,500	3, 5	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	High/Low Control	44	1,725	0.1	346	0	\$60	\$335	\$100	3.9
Lounge 1st	2	Linear Fluorescent - T12: 4' T12 (40W) - 4L	Wall Switch	S	176	2,000	2, 4	Relamp & Reballast	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.2	598	0	\$104	\$353	\$60	2.8
Lounge 1st	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1

Existing Conditions							Proposed Conditions							Energy Impact & Financial Analysis							
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Main Vestibule	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,500	3, 4	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,725	0.1	407	0	\$71	\$262	\$60	2.8
Main Office	3	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	3	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.2	488	0	\$85	\$489	\$95	4.6
Principals Office	1	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3	Relamp	No	1	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	2,000	0.0	123	0	\$21	\$73	\$20	2.5
Restroom - Class 1	1	Compact Fluorescent: (1) 32W Circline/T9 Plug-In Lamp	Wall Switch	S	32	2,000	3	Relamp	No	1	LED Lamps: Circline Lamps	Wall Switch	23	2,000	0.0	20	0	\$3	\$25	\$5	5.8
Restroom - Female 1st	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	1,380	0.1	185	0	\$32	\$189	\$40	4.6
Restroom - Lounge 1st	1	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3	Relamp	No	1	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	2,000	0.0	123	0	\$21	\$73	\$20	2.5
Restroom - Main Office	1	Compact Fluorescent: (1) 32W Circline/T9 Plug-In Lamp	Wall Switch	S	32	2,000	3	Relamp	No	1	LED Lamps: Circline Lamps	Wall Switch	23	2,000	0.0	20	0	\$3	\$25	\$5	5.8
Restroom - Male 1st	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.1	326	0	\$57	\$262	\$60	3.6
Stage	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	750	3, 4	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	518	0.1	139	0	\$24	\$416	\$75	14.1
Stairs #1	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch		62	2,500	3, 5	Relamp	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,725	0.3	1,039	0	\$181	\$779	\$405	2.1
Stairs #1	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch		114	2,500	3, 5	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	1,725	0.1	407	0	\$71	\$146	\$40	1.5
Stairs #2	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch		62	2,500	3, 5	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,725	0.2	924	0	\$161	\$742	\$360	2.4
Stairs #3	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch		62	2,500	3, 5	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,725	0.2	924	0	\$161	\$742	\$360	2.4
Stairs #3	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch		114	2,500	3, 5	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	1,725	0.1	407	0	\$71	\$146	\$40	1.5
Stairs #4	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch		62	2,500	3, 5	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,725	0.2	577	0	\$101	\$408	\$225	1.8
Storage - Class 1	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	750	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	750	0.0	27	0	\$5	\$37	\$10	5.6
Classroom 10	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 10	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 12	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 12	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 13	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 13	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 15	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 15	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 16	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1

Existing Conditions							Proposed Conditions							Energy Impact & Financial Analysis							
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Classroom 16	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 17	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 17	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 18	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 18	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 19	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Classroom 20	7	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	7	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.4	1,139	0	\$199	\$781	\$175	3.1
Classroom 9	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,000	0.0	73	0	\$13	\$37	\$10	2.1
Classroom 9	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.6	1,953	0	\$341	\$1,146	\$275	2.6
Corridor - Classes 2nd	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,500	3, 5	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	1,725	0.1	407	0	\$71	\$371	\$110	3.7
Corridor - Nurse	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,500	3, 5	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	1,725	0.1	407	0	\$71	\$371	\$110	3.7
Restroom - Nurse	1	LED Lamps: (1) 9W A19 Screw-In Lamp	Wall Switch	S	9	2,000		None	No	1	LED Lamps: (1) 9W A19 Screw-In Lamp	Wall Switch	9	2,000	0.0	0	0	\$0	\$0	\$0	0.0
Office - Nurse	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.1	326	0	\$57	\$262	\$60	3.6
Restroom - Female 2nd	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	1,380	0.1	185	0	\$32	\$189	\$40	4.6
Restroom - Male 2nd	1	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3	Relamp	No	1	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	2,000	0.0	123	0	\$21	\$73	\$20	2.5
Classroom B1	16	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	16	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.9	2,604	-1	\$454	\$1,708	\$390	2.9
Classroom B5	14	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3, 4	Relamp	Yes	14	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	1,380	0.4	1,293	0	\$226	\$781	\$175	2.7
Classroom B5	5	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	5	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.3	814	0	\$142	\$635	\$135	3.5
Classroom B6	9	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	9	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.5	1,465	0	\$255	\$927	\$215	2.8
Computer Lab - Basement	22	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,000	3, 4	Relamp	Yes	22	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	1,380	0.7	2,032	0	\$354	\$1,343	\$290	3.0
Corridor - Basement #1	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Corridor - Basement #1	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,500	3, 5	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,725	0.1	346	0	\$60	\$335	\$135	3.3
Corridor - Basement #1	3	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,500	3, 5	Relamp	Yes	3	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	1,725	0.2	610	0	\$106	\$444	\$165	2.6
Corridor - Basement #2	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Corridor - Basement #2	2	Linear Fluorescent - T8: 2' T8 (17W) - 4L	Wall Switch	S	63	2,500	3, 5	Relamp	Yes	2	LED - Linear Tubes: (4) 2' Lamps	High/Low Control	34	1,725	0.1	217	0	\$38	\$355	\$94	6.9

Existing Conditions							Proposed Conditions								Energy Impact & Financial Analysis						
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Corridor - Basement #2	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,500	3, 5	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,725	0.1	231	0	\$40	\$298	\$90	5.2
Corridor - Basement #2	3	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,500	3, 5	Relamp	Yes	3	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	1,725	0.2	610	0	\$106	\$444	\$165	2.6
Corridor to Rosa Parks School - Basement	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,500	3, 5	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	1,725	0.1	407	0	\$71	\$371	\$110	3.7
Electrical Room - Meter	3	LED Lamps: (1) 20W A19 Screw-In Lamp	Wall Switch	S	20	750	4	None	Yes	3	LED Lamps: (1) 20W A19 Screw-In Lamp	Occupancy Sensor	20	518	0.0	15	0	\$3	\$270	\$35	87.8
Gymnasium	17	LED - Fixtures: Ceiling Mount	Wall Switch	S	100	2,000	4	None	Yes	17	LED - Fixtures: Ceiling Mount	Occupancy Sensor	100	1,380	0.4	1,159	0	\$202	\$540	\$70	2.3
Kitchen / Cafeteria	23	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	23	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	1.2	3,743	-1	\$653	\$2,220	\$530	2.6
Mechanical Boiler	1	LED Lamps: (1) 20W A19 Screw-In Lamp	Wall Switch	S	20	750		None	No	1	LED Lamps: (1) 20W A19 Screw-In Lamp	Wall Switch	20	750	0.0	0	0	\$0	\$0	\$0	0.0
Mechanical Boiler	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	750	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	750	0.0	54	0	\$9	\$73	\$20	5.6
Office - Gym	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.1	326	0	\$57	\$262	\$60	3.6
Office - Gym Custodian	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.1	326	0	\$57	\$262	\$60	3.6
Office - Tech Coordinator	10	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	10	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.5	1,628	0	\$284	\$1,000	\$235	2.7
Office B2 - ESL	8	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	8	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.4	1,302	0	\$227	\$854	\$195	2.9
Office B3	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.1	326	0	\$57	\$262	\$60	3.6
Office B4	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.1	326	0	\$57	\$262	\$60	3.6
Restroom - Female Basement	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.1	326	0	\$57	\$262	\$60	3.6
Restroom - Male Basement	2	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,000	3, 4	Relamp	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,380	0.1	326	0	\$57	\$262	\$60	3.6
Exterior Lighting	1	LED - Fixtures: Wall Pack	Photocell		50	4,380		None	No	1	LED - Fixtures: Wall Pack	Photocell	50	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Exterior Lighting	7	Metal Halide: (1) 100W Lamp	Photocell		128	4,380	1	Fixture Replacement	No	7	LED - Fixtures: Outdoor Wall-Mounted Area Fixture	Photocell	30	4,380	0.0	3,005	0	\$530	\$1,838	\$350	2.8



Motor Inventory & Recommendations

		Existing Conditions									Proposed Conditions					Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application	HP Per Motor	Full Load Efficiency	VFD Control?	Manufacturer	Model	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficiency Motors?	Full Load Efficiency	Install VFDs?	Number of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Mechanical Boiler	Boiler Feed Water	2	Boiler Feed Water Pump	0.3	65.0%	No			W	2,471		No	65.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Mechanical Boiler	Boiler #1	1	Combustion Air Fan	3.0	86.5%	No			W	2,471		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Mechanical Boiler	Boiler #2	1	Combustion Air Fan	1.5	84.0%	No			W	2,471		No	84.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Gymnasium	Gymnasium	1	Exhaust Fan	0.3	62.5%	No			W	2,471		No	62.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Kitchen	1	Kitchen Hood Exhaust Fan	0.8	78.0%	No			W	2,625		No	78.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Mechanical Boiler	Sump Pump	1	Process Pump	0.3	62.5%	No			W	730		No	62.5%	No		0.0	0	0	\$0	\$0	\$0	0.0



Packaged HVAC Inventory & Recommendations

		Existing Conditions									Proposed Conditions								Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/IEER/EER)	Heating Mode Efficiency	Manufacturer	Model	Remaining Useful Life	ECM #	Install High Efficiency System?	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/IEER/EER)	Heating Mode Efficiency	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Classroom 1	Classroom 1	1	Window AC	1.17		9.70				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 2	Classroom 2	1	Window AC	1.17		9.70				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 3	Classroom 3	1	Window AC	1.17		9.70				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 4	Classroom 4	1	Window AC	1.17		9.70				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 5	Classroom 5	1	Window AC	1.17		9.70				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 6	Classroom 6	1	Window AC	1.17		9.70				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 7	Classroom 7	1	Window AC	1.17		9.70				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 8	Classroom 8	1	Window AC	1.17		9.70				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Lounge 1st	Lounge 1st	1	Window AC	1.17		9.70		Friedrich		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Main Office	Main Office	1	Window AC	0.67		12.10		GE		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Principals Office	Principals Office	1	Window AC	0.63		11.00		Friedrich		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 10	Classroom 10	1	Window AC	1.92		9.80				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 12	Classroom 12	1	Window AC	1.92		9.80				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 13	Classroom 13	1	Window AC	1.92		9.80				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 15	Classroom 15	1	Window AC	1.92		9.80				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 16	Classroom 16	1	Window AC	1.92		9.80				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 17	Classroom 17	1	Window AC	1.92		9.80				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 18	Classroom 18	1	Window AC	1.92		9.80				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 19	Classroom 19	1	Window AC	1.92		9.80		Friedrich		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom 20	Classroom 20	1	Window AC	1.92		9.80				W		No							0.0	0	0	\$0	\$0	\$0	0.0

		Existing Conditions									Proposed Conditions								Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/IEER/EER)	Heating Mode Efficiency	Manufacturer	Model	Remaining Useful Life	ECM #	Install High Efficiency System?	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (kBtu/hr)	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Classroom 9	Classroom 9	1	Window AC	1.92		9.80				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Office - Nurse	Office - Nurse	1	Window AC	1.17		9.70		Friedrich		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom B1	Classroom B1	1	Window AC	2.33		9.80		Friedrich		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom B5	Classroom B5	1	Window AC	2.33		9.80		Friedrich		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classroom B6	Classroom B6	1	Window AC	2.33		9.80		Friedrich		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Computer Lab - Basement	Computer Lab - Basement	2	Window AC	2.33		9.80		Friedrich		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Kitchen / Cafeteria	Kitchen / Cafeteria	2	Window AC	2.33		9.80		Friedrich		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Office - Tech Coordinator	Office - Tech Coordinator	1	Window AC	1.00		11.30				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Office B2 - ESL	Office B2 - ESL	1	Window AC	1.00		11.30				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Office B3	Office B3	1	Window AC	1.00		11.30				W		No							0.0	0	0	\$0	\$0	\$0	0.0
Office B4	Office B4	1	Window AC	1.00		11.30		Frigidaire		W		No							0.0	0	0	\$0	\$0	\$0	0.0

Space Heating Boiler Inventory & Recommendations

		Existing Conditions						Proposed Conditions							Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	System Quantity	System Type	Output Capacity per Unit (MBh)	Manufacturer	Model	Remaining Useful Life	ECM #	Install High Efficiency System?	System Quantity	System Type	Output Capacity per Unit (MBh)	Heating Efficiency	Heating Efficiency Units	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Mechanical Boiler	Heating System	1	Forced Draft Steam Boiler	3,425	Burnham	V1117H	W		No						0.0	0	0	\$0	\$0	\$0	0.0
Mechanical Boiler	Heating System	1	Forced Draft Steam Boiler	3,422	Weil McLain	1388	W		No						0.0	0	0	\$0	\$0	\$0	0.0

Pipe Insulation Recommendations

		Recommendation Inputs			Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Affected	ECM #	Length of Uninsulated Pipe (ft)	Pipe Diameter (in)	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Mechanical Boiler	Domestic Hot Water	6	30	1.00	0.0	0	11	\$103	\$358	\$60	2.9

DHW Inventory & Recommendations

		Existing Conditions					Proposed Conditions							Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	System Quantity	System Type	Manufacturer	Model	Remaining Useful Life	ECM #	Replace?	System Quantity	System Type	Fuel Type	System Efficiency	Efficiency Units	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Mechanical Boiler	Domestic Hot Water	1	Storage Tank Water Heater (> 50 Gal)	Rheem	PRO G75-76N	N		No						0.0	0	0	\$0	\$0	\$0	0.0

Low-Flow Device Recommendations

		Recommendation Inputs				Energy Impact & Financial Analysis						
Location	ECM #	Device Quantity	Device Type	Existing Flow Rate (gpm)	Proposed Flow Rate (gpm)	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Central Elementary School	7	17	Faucet Aerator (Lavatory)	2.20	0.50	0.0	0	8	\$79	\$122	\$61	0.8

Commercial Refrigerator/Freezer Inventory & Recommendations

		Existing Conditions				Proposed Conditions		Energy Impact & Financial Analysis						
Location	Quantity	Refrigerator/ Freezer Type	Manufacturer	Model	ENERGY STAR Qualified?	ECM #	Install ENERGY STAR Equipment?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen / Cafeteria	3	Refrigerator Chest			No		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen / Cafeteria	1	Stand-Up Freezer, Solid Door (31 - 50 cu. ft.)	Turbo Air	M3F47-2	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen / Cafeteria	1	Stand-Up Refrigerator, Solid Door (31 - 50 cu. ft.)	Continental	2R	No		No	0.0	0	0	\$0	\$0	\$0	0.0

Cooking Equipment Inventory & Recommendations

		Existing Conditions				Proposed Conditions		Energy Impact & Financial Analysis						
Location	Quantity	Equipment Type	Manufacturer	Model	High Efficiency Equipment?	ECM #	Install High Efficiency Equipment?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen / Cafeteria	1	Electric Convection Oven (Half Size)	Blodgett		No		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen / Cafeteria	1	Insulated Food Holding Cabinet (3/4 Size)	Wittco		No		No	0.0	0	0	\$0	\$0	\$0	0.0




Plug Load Inventory

Existing Conditions						
Location	Quantity	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified ?	Manufacturer	Model
Central Elementary School	1	Coffee Machine	500	No		
Central Elementary School	62	Desktop	120	No		
Central Elementary School	4	Microwave	1,000	No		
Central Elementary School	1	Paper Shredder	200	No		
Central Elementary School	23	Printer (Medium/Small)	450	No		
Central Elementary School	2	Printer/Copier (Large)	600	No		
Central Elementary School	1	Projector	240	No		
Central Elementary School	4	Refrigerator (Mini)	174	No		
Central Elementary School	1	Refrigerator (Residential)	340	No		
Central Elementary School	1	Serving Table (Chilled/Heated)	3,000	No		
Central Elementary School	23	Smart Board	215	Yes		
Central Elementary School	2	Water Cooler	192	No		

APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE

Energy use intensity (EUI) is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.



ENERGY STAR® Statement of Energy Performance

67

ENERGY STAR®
Score¹

Central Elementary School

Primary Property Type: K-12 School
Gross Floor Area (ft²): 52,400
Built: 1921

For Year Ending: November 30, 2021
Date Generated: November 15, 2022

1. The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.

Property & Contact Information			
Property Address Central Elementary School 33 Cleveland Street Orange, New Jersey 07049	Property Owner Orange Board of Education 451 Lincoln Avenue Orange, NJ 07050 (973) 677-6000	Primary Contact Jason E. Ballard 451 Lincoln Avenue Orange, NJ 07050 (973) 677-6000 ballarja@orange.k12.nj.us	
Property ID: 21694613			

Energy Consumption and Energy Use Intensity (EUI)			
Site EUI	Annual Energy by Fuel	National Median Comparison	
64.9 kBtu/ft²	Natural Gas (kBtu)	2,822,265 (83%)	National Median Site EUI (kBtu/ft²)
	Electric - Grid (kBtu)	576,031 (17%)	National Median Source EUI (kBtu/ft²)
			% Diff from National Median Source EUI
			-17%
Source EUI	Annual Emissions		
87.3 kBtu/ft²	Greenhouse Gas Emissions (Metric Tons CO2e/year)		213

Signature & Stamp of Verifying Professional

I _____ (Name) verify that the above information is true and correct to the best of my knowledge.

LP Signature: _____ Date: _____

Licensed Professional



Professional Engineer or Registered Architect Stamp (if applicable)

APPENDIX C: GLOSSARY

TERM	DEFINITION
Blended Rate	Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour.
Btu	<i>British thermal unit</i> : a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit.
CHP	<i>Combined heat and power</i> . Also referred to as cogeneration.
COP	<i>Coefficient of performance</i> : a measure of efficiency in terms of useful energy delivered divided by total energy input.
Demand Response	Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives.
DCV	<i>Demand control ventilation</i> : a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need.
US DOE	<i>United States Department of Energy</i>
EC Motor	<i>Electronically commutated motor</i>
ECM	<i>Energy conservation measure</i>
EER	<i>Energy efficiency ratio</i> : a measure of efficiency in terms of cooling energy provided divided by electric input.
EUI	<i>Energy Use Intensity</i> : measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance.
Energy Efficiency	Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service.
ENERGY STAR®	ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.
EPA	<i>United States Environmental Protection Agency</i>
Generation	The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil).
GHG	<i>Greenhouse gas</i> gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.
gpf	<i>Gallons per flush</i>

gpm	<i>Gallon per minute</i>
HID	<i>High intensity discharge</i> : high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	<i>Horsepower</i>
HPS	<i>High-pressure sodium</i> : a type of HID lamp.
HSPF	<i>Heating seasonal performance factor</i> : a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	<i>Heating, ventilating, and air conditioning</i>
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	<i>Integrated part load value</i> : a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units
kW	<i>Kilowatt</i> : equal to 1,000 Watts.
kWh	<i>Kilowatt-hour</i> : 1,000 Watts of power expended over one hour.
LED	<i>Light emitting diode</i> : a high-efficiency source of light with a long lamp life.
LGEA	<i>Local Government Energy Audit</i>
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, which is implemented in a building system to reduce total energy consumption.
MH	<i>Metal halide</i> : a type of HID lamp.
MBh	<i>Thousand Btu per hour</i>
MBtu	<i>One thousand British thermal units</i>
MMBtu	<i>One million British thermal units</i>
MV	<i>Mercury Vapor</i> : a type of HID lamp.
NJBPU	<i>New Jersey Board of Public Utilities</i>
NJCEP	<i>New Jersey's Clean Energy Program</i> : NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money, and the environment.
psig	Pounds per square inch gauge
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	<i>Photovoltaic</i> : refers to an electronic device capable of converting incident light directly into electricity (direct current).

SEER	<i>Seasonal energy efficiency ratio</i> : a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	<i>Statement of energy performance</i> : a summary document from the ENERGY STAR® Portfolio Manager®.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC (II)	<i>Solar renewable energy credit</i> : a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of 1/8 th of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use.
VAV	<i>Variable air volume</i>
VFD	<i>Variable frequency drive</i> : a controller used to vary the speed of an electric motor.
WaterSense™	The symbol for water efficiency. The WaterSense™ program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.