





Local Government Energy Audit Report

Columbus Park

August 10, 2023

Prepared for:

Piscataway Township

11th Street

Piscataway Township, New Jersey 08854

Prepared by:

TRC

317 George Street

New Brunswick, New Jersey 08901





Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities and help prioritize specific measures for implementation. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC reviewed the energy conservation measures and estimates of energy savings for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated material and labor costs primarily on RS Means cost manuals as well as on our experience at similar facilities. This approach is based on standard cost estimating manuals and is vendor neutral. Cost estimates include material and labor pricing associated with one for one equipment replacements. Cost estimates do not include demolition or removal of hazardous waste. The actual implementation costs for energy savings projects are anticipated to be significantly higher based on the specific conditions at your site(s). We strongly recommend that you work with your design engineer or contractor to develop actual project costs for your specific scope of work for the installation of high efficiency equipment. We encourage you to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on selected products and installers. TRC and NJBPU do not guarantee cost estimates and shall in no event be held liable should actual installed costs vary from these material and labor estimates.

Incentive values provided in this report are estimated based on previously run state efficiency programs. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available utility program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state, and federal requirements.

Copyright ©2023 TRC. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.





Table of Contents

1	Exec	utive Summary	1
	1.1	Planning Your Project	4
	Pic	k Your Installation Approach	4
	-	tions from Your Utility Company	
		escriptive and Custom Rebates	
		rect Installgineered Solutions	
	-	vitions from New Jersey's Clean Energy Program	
2		ing Conditions	
	2.1	Site Overview	6
	Red	cent improvements and Facility Concerns	6
	2.2	Building Occupancy	
	2.3	Building Envelope	
	2.4	Lighting Systems	
	2.5	Building General Exhaust Air Systems	
	2.6 2.7	Domestic Hot WaterPlug Load and Vending Machines	
	2.8	Water-Using Systems	
3		gy Use and Costs	
	3.1	Electricity	14
	3.2	Natural Gas	15
	3.3	Benchmarking	16
	Tra	acking Your Energy Performance	17
4	Energ	gy Conservation Measures	18
	4.1	Lighting	21
	ECI	M 1: Install LED Fixtures	21
	4.2	Lighting Controls	21
	ECI	M 2: Install Occupancy Sensor Lighting Controls	22
	4.3	HVAC Improvements	22
	ECI	M 3: Install Pipe Insulation	22
	4.4	Domestic Water Heating	
		M 4: Install Tankless Water Heater	
	4.5	Custom Measures	24
	CM	1 6: Replace Electric Water Heater with Heat Pump Water Heater	24
	4.6	Measures for Future Consideration	25
		grade to a Heat Pump System	
5	Energ	gy Efficient Best Practices	26






	Ener	gy Tracking with ENERGY STAR Portfolio Manager	26
		therization	
		rs and Windows	
	•	ing Maintenance	
		to Reduce Cooling Load	
		C Filter Cleaning and Replacement	
		er Heater Maintenance	
		er Conservation	
		urement Strategies	
6	On-site	e Generation	29
	6.1	Solar Photovoltaic	30
	6.2	Combined Heat and Power	
7	Floctri	c Vehicles (EV)	
•	Liccuit	• •	
	7.1	Electric Vehicle Charging	33
8	Project	t Funding and Incentives	35
	8.1	Utility Energy Efficiency Programs	36
	Preso	criptive and Custom	36
	Direc	t Install	36
	Engir	neered Solutions	37
	8.2	New Jersey's Clean Energy Programs	38
	Large	e Energy Users	38
	Com	bined Heat and Power	39
	Succ	essor Solar Incentive Program (SuSI)	40
	Ener	gy Savings Improvement Program	41
9	Project	t Development	42
10	Energy	Purchasing and Procurement Strategies	43
	10.1	Retail Electric Supply Options	
	10.2	Retail Natural Gas Supply Options	43
Αp	pendix /	A: Equipment Inventory & Recommendations	A-1
Αp	pendix I	B: ENERGY STAR Statement of Energy Performance	B-1
Δn	nendiy (C. Glossary	C-1





1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Columbus Park. This report provides you with information about your facility's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in your facility. TRC conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and to help protect our environment by reducing statewide energy consumption.

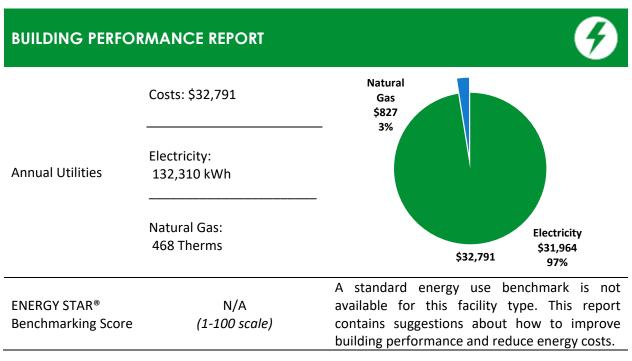

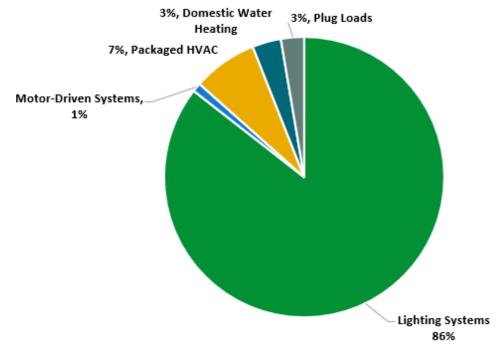


Figure 1 - Energy Use by System






POTENTIAL IMPROVEMENTS



This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.


Scenario 1: Full Package (All Evaluated Measures)

Installation Cost		\$174,220			
Potential Rebates & Incentive	s ¹	\$1,312			
Annual Cost Savings		\$19,376			
Annual Energy Cayings	Electricity: 80,018 kW				
Annual Energy Savings	Natural Gas: 26 Therm				
Greenhouse Gas Emission Sav	ings	40 Tons			
Simple Payback		8.9 Years			
Site Energy Savings (All Utilitie	es)	55%			



Scenario 2: Cost Effective Package²

Installation Cost	\$167,325			
Potential Rebates & Incentives	\$572			
Annual Cost Savings	\$19,211			
Annual Energy Savings	Electricity: 79,512 kWh			
Annual Energy Savings	Natural Gas: 1 Therms			
Greenhouse Gas Emission Savi	ngs 40 Tons			
Simple Payback	8.7 Years			
Site Energy Savings (all utilities	54%			



On-site Generation Potential

Photovoltaic	None
Combined Heat and Power	None

¹ Incentives are based on previously run state rebate programs. Contact your utility provider for current program incentives that may apply.

² A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.





#	Energy Conservation Measure	Cost Effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades		78,338	0.0	0	\$18,925	\$164,394	\$500	\$163,894	8.7	78,886
ECM 1	Install LED Fixtures	Yes	78,338	0.0	0	\$18,925	\$164,394	\$500	\$163,894	8.7	78,886
Lighting Control Measures			163	0.0	0	\$39	\$540	\$70	\$470	12.2	160
ECM 2	Install Occupancy Sensor Lighting Controls	Yes	163	0.0	0	\$39	\$540	\$70	\$470	12.2	160
HVAC Sy	HVAC System Improvements		506	0.0	1	\$140	\$2,680	\$440	\$2,240	16.0	630
ECM 3	Install Pipe Insulation	No	506	0.0	1	\$140	\$2,680	\$440	\$2,240	16.0	630
Domesti	c Water Heating Upgrade		0	0.0	2	\$28	\$4,222	\$302	\$3,920	142.4	182
ECM 4	Install Tankless Water Heater	No	0	0.0	1	\$25	\$4,215	\$300	\$3,915	156.3	166
ECM 5	Install Low-Flow DHW Devices	Yes	0	0.0	0	\$2	\$7	\$2	\$5	2.1	16
Custom	Measures		1,011	0.0	0	\$244	\$2,383	\$0	\$2,383	9.8	1,018
ECM 6	Replace Electric Water Heater with Heat Pump Water Heater	Yes	1,011	0.0	0	\$244	\$2,383	\$0	\$2,383	9.8	1,018
	TOTALS (COST EFFECTIVE MEASURES)			0.0	0	\$19,211	\$167,325	\$572	\$166,753	8.7	80,080
	TOTALS (ALL MEASURES)			0.0	3	\$19,376	\$174,220	\$1,312	\$172,908	8.9	80,876

^{* -} All incentives presented in this table are included as placeholders for planning purposes and are based on previously run state rebate programs. Contact your utility provider for details on current programs.

Figure 2 – Evaluated Energy Improvements

For more detail on each evaluated energy improvement and a break out of cost-effective improvements, see **Section 4: Energy Conservation Measures.**

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- ♦ How will the project be funded and/or financed?
- Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

Utility-run energy efficiency programs and New Jersey's Clean Energy Programs, give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives <u>before</u> purchasing materials or starting installation.

Options from Your Utility Company

Prescriptive and Custom Rebates

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the Prescriptive and Custom Rebates program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval may be required for some incentives. Contact your utility company for more details prior to project installation.

Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized contractor. This program can provide incentives up to 70% or 80% of the cost of selected measures. A Direct Install contractor will assess and verify individual measure eligibility and perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Engineered Solutions

The Engineered Solutions program provides tailored energy-efficiency assistance and turnkey engineering services to municipalities, universities, schools, hospitals, and healthcare facilities (MUSH), non-profit entities, and multifamily buildings. The program provides all professional services from audit, design, construction administration, to commissioning and measurement and verification for custom whole-building energy-efficiency projects. Engineered Solutions allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs.

For more details on these programs please contact your utility provider.





Options from New Jersey's Clean Energy Program

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat and Power (CHP)

The CHP program provides incentives for combined heat and power (i.e., cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Successor Solar Incentive Program (SuSI)

New Jersey is committed to supporting solar energy. Solar projects help the state reach the renewable goals outlined in the state's Energy Master Plan. The SuSI program is used to register and certify solar projects in New Jersey. Rebates are not available, but certified solar projects are able to earn one SREC II (Solar Renewable Energy Certificates II) for each megawatt-hour of solar electricity produced from a qualifying solar facility.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce electric demand during times of peak demand, the grid is made more reliable, and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.

Large Energy User Program (LEUP)

LEUP is designed to promote self-investment in energy efficiency. It incentivizes owners/users of buildings to upgrade or install energy conserving measures in existing buildings to help offset the capital costs associated with the project. The efficiency upgrades are customized to meet the requirements of the customers' existing facilities, while advancing the State's energy efficiency, conservation, and greenhouse gas reduction goals.

For more details on these programs please visit New Jersey's Clean Energy Program website.







2 EXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Columbus Park. This report provides information on how your facility uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

2.1 Site Overview

On March 22, 2023, TRC performed an energy audit at Columbus Park located in Piscataway Township, New Jersey. TRC met with Jim Ferratti to review the facility operations and help focus our investigation on specific energy-using systems.

Columbus Park includes a single story, 6,500 square foot building built in 2016. Spaces include restrooms and grounds room. A parking lot served by the main electric meter is illuminated by LED cobra head fixtures.

Baseball fields and the surrounding park area are illuminated by large 1000-watt metal halide pole lights which are maintained by Musco Lighting.

The facility is partially heated by a single gas-fired unit heater in the grounds room. Heating and cooling are not present in the restrooms.



Facility Aerial View

Recent improvements and Facility Concerns

There have been no recent improvements at Columbus Park. Facility concerns include aging field floodlights and a broken instantaneous water heater.





2.2 Building Occupancy

Columbus Park opens at 10:00 AM and closes at 7:00 PM. The park is open year-round but there is one staff member present at the facility from May 20 to September 17. Outside of May through September, the facility is occupied intermittently, as needed for maintenance and operations. Restrooms are locked and water is shut off during the winter.

Note: the energy and economic analysis for this building is based on the use of the building during the utility billing period, and that results will vary depending on changes to building use patterns.

Building Name	Weekday/Weekend	Operating Schedule		
Columbus Park	Weekday	10:00 AM - 7:00 PM		
Columbus Park	Weekend	10:00 AM - 7:00 PM		

Figure 3 - Building Occupancy Schedule

2.3 Building Envelope

The Columbus Park building is comprised of concrete masonry units (CMUs) with a stone façade. Interior walls vary in finishes including tile, wood panels, and unfinished, exposed CMU.

A standing seam metal roof covers the building and does not include an accessible crawl space or attic space. The interior and exterior walls, as well as the roof, are in good condition.

Each restroom has two rectangular privacy windows which are well sealed and are in good condition.

Exterior doors consist of solid metal units which are all in good condition. Two motorized garage doors are located on the front and side of the building to allow larger grounds equipment access to the building.





Exterior Building Walls










Interior Walls



Standing Seam Metal Roof







Garage Door



Metal Door

2.4 Lighting Systems

The primary interior lighting system for the grounds building area uses 32-Watt LED linear strip fixtures. The restrooms use 15-Watt LED downlight recessed fixtures. There are no other interior light fixtures. The interior lights are in good condition apart from two LED light strips missing the light diffusing cover.

Exterior fixtures include 25-Watt LED wall packs, 20-Watt surface mounted metal halide lamps, and 15-Watt LED wall sconces. The LED wall packs are controlled by photocell while the rest of the exterior building lighting, including the LED wall sconces, are controlled by timeclock. In general, exterior LED lights are in good condition although some of the metal halide lamps are failing.


The parking lot is illuminated by 100-Watt LED outdoor pole mounted area fixtures. Photocells control the lights, and they are in good condition.





Large 1000-Watt metal halide lights illuminate the surrounding baseball fields and park space. A switch controls the lights which are used intermittently and as needed for sports activities. Musco Lighting maintains the fixtures and Piscataway Township pays the utility for the electricity to operate them. The field lights are not energy efficient, with aging hardware, and have been evaluated for replacement.







Exterior LED Wall Pack



Surface Mounted Metal Halide



LED Wall Sconce,



Photocell









LED Pole Mounted Lighting

1000-Watt Metal Halide Field Lighting





2.5 Building General Exhaust Air Systems

There are two above ceiling general exhaust fans that ventilate the restrooms. Fractional horsepower motors drive the fans, which were inaccessible during the audit and have been estimated.

2.6 Domestic Hot Water

A natural gas, Rheem tankless water heater, with an input capacity of 157 MBh and a Bradford White 30-gallon electric storage tank water heater both serve Columbus Park. The tankless water heater has a system efficiency of 82% and is currently out of order. Plans have been made to repair and or replace the unit. The electric storage water heater has an input capacity of 4.5 kW, is 11 years old, and in good condition. Domestic hot water (DHW) piping consists of both copper and cross-linked polyethylene (PEX) piping, neither of which are insulated.

A measure to replace the electric water heater with a heat pump water heater is evaluated.

It was noted during the site audit that the safety relief valve on the electric 30-gallon storage tank does not have a ground-pointing diverting pipe attached. If the safety relief valve discharges, it is recommended that the hot water and vapor be directed downwards and away from any potential nearby personnel.



Tankless Water Heater



Storage Tank Water Heater



Name Plate



Uninsulated DHW Pipes






2.7 Plug Load and Vending Machines

The location is doing a great job managing the electrical plug loads. This report makes additional suggestions for ECMs in this area as well as energy efficient best practices.

There is one computer on-site running continuously to serve as the security system. A residential-style refrigerator is the only other constant plug load at Columbus Park.





Desktop Computer

Residential-style Refrigerator

2.8 Water-Using Systems

There are two restrooms with toilets, urinals, and sinks. Faucets are low flow devices rated at 1.8 gallons per minute (gpm) or lower. There are three faucets per restroom making a total of six faucets. Toilets are rated at 2.5 gallons per flush (gpf) and urinals are rated at 2.5 gpf. There is one utility sink in the grounds area with a flow rate of 2 gpm and it has been evaluated for the installation of an aerator to save water consumption. Overall, the site's water usage is low.





Restroom Sink

Utility Sink






3 ENERGY USE AND COSTS

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Utility Summary								
Fuel	Cost							
Electricity	132,310 kWh	\$31,964						
Natural Gas	468 Therms	\$827						
Total	\$32,791							



An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.





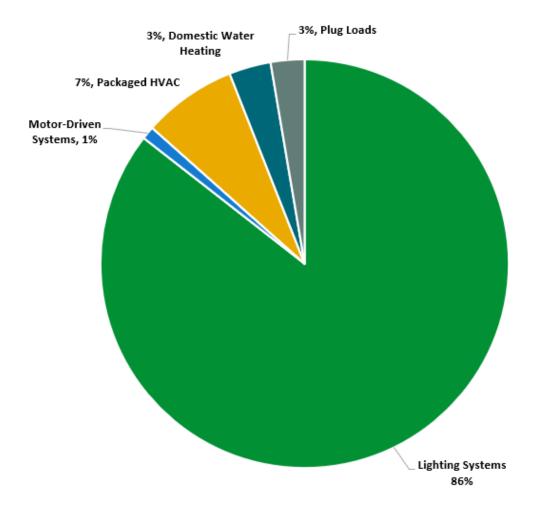



Figure 4 - Energy Balance





3.1 Electricity

PSE&G delivers electricity under rate class General Lighting and Power, with electric production provided by EDF Energy Services, a third-party supplier.

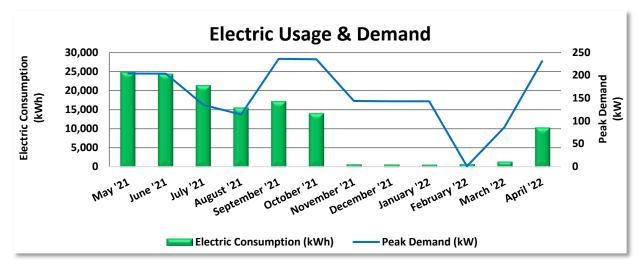

Electric Billing Data									
Period Ending	Usage		2 0	Demand Cost	Total Electric Cost				
6/13/21	32	24,856	204	\$2,426	\$6,208				
7/13/21	30	24,373	204	\$2,420	\$6,104				
8/11/21	29	21,400	135	\$1,084	\$4,759				
9/10/21	30	15,550	114	\$1,585	\$3,680				
10/11/21	31	17,253	236	\$935	\$3,348				
11/9/21	29	14,105	235	\$939	\$2,913				
12/10/21	31	758	144	\$577	\$689				
1/12/22	33	696	143	\$567	\$679				
2/10/22	29	682	143	\$567	\$677				
3/14/22	32	825	1	\$4	\$133				
4/12/22	29	1,461	87	\$342	\$561				
5/12/22	30	10,351	231	\$913	\$2,215				
Totals	365	132,310	236	\$12,358	\$31,964				
Annual	365	132,310	236	\$12,358	\$31,964				

Notes:


- Peak demand of 236 kW occurred in September '21.
- Average demand over the past 12 months was 156 kW.
- The average electric cost over the past 12 months was \$0.242/kWh, which is the blended rate that includes energy supply, distribution, demand, and other charges. This report uses this blended rate to estimate energy cost savings.
- Significant demand charges were incurred during the utility period used in this evaluation. The
 only significant load are the baseball field lights. The utility rate schedule applies a demand charge
 during the summer for equipment operated anytime up until 8:00 P.M. If possible, eliminate use
 of the baseball field lighting during the summer on peak period. If not possible, contact your utility
 to find out if you qualify for a rate schedule that will not levy a summer demand charge.





3.2 Natural Gas

PSE&G delivers natural gas under rate class GSG (HTG), with natural gas supply provided by PSE&G, a third-party supplier.

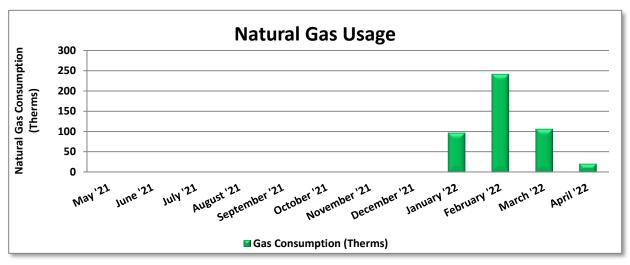

Gas Billing Data									
Period Ending	Days in Period	Natural Gas Usage (Therms)	Natural Gas Cost						
6/11/21	30	0	\$17						
7/13/21	32	0	\$18						
8/12/21	30	0	\$18						
9/12/21	31	0	\$18						
10/13/21	31	0	\$18						
11/10/21	28	0	\$18						
12/13/21	33	0	\$18						
1/13/22	31	0	\$19						
2/10/22	28	98	\$136						
3/14/22	32	242	\$328						
4/12/22	29	107	\$146						
5/12/22	30	21	\$74						
Totals	365	468	\$827						
Annual	365	468	\$827						

Notes:

• The average gas cost for the past 12 months is \$1.769/therm, which is the blended rate used throughout the analysis.





3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager®* software. Benchmarking compares your building's energy use to that of similar buildings across the country, while neutralizing variations due to location, occupancy, and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

Benchmarking Score

N/A

Due to its unique characteristics, this building type is not able to receive a benchmarking score. This report contains suggestions about how to improve building performance and reduce energy costs.

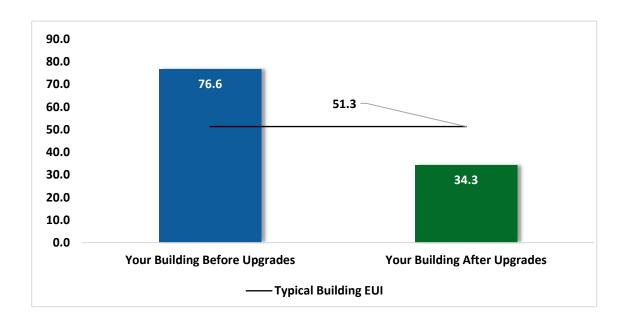


Figure 5 - Energy Use Intensity Comparison³

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. Several factors can cause a building to vary from typical energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.

_

³ Based on all evaluated ECMs





Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager account for your facility and have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR Portfolio Manager to track your building's performance at: https://www.energystar.gov/buildings/training.

For more information on ENERGY STAR and Portfolio Manager, visit their website.





4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements and provide information about the cost effectiveness of those improvements. Most energy conservation measures have received preliminary analysis of feasibility, which identifies expected ranges of savings. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives in this report are based on the previously run state rebate program SmartStart, which has been retired. Now, all investor-owned gas and electric utility companies are offering complementary energy efficiency programs directly to their customers. Some measures and proposed upgrades may be eligible for higher incentives than those shown below. The incentives in the summary tables should be used for high-level planning purposes. To verify incentives, reach out to your utility provider or visit the NJCEP website for more information.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see Appendix A: Equipment Inventory & Recommendations.





#	Energy Conservation Measure	Cost Effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)		CO₂e Emissions Reduction (lbs)
Lighting	Upgrades		78,338	0.0	0	\$18,925	\$164,394	\$500	\$163,894	8.7	78,886
ECM 1	Install LED Fixtures	Yes	78,338	0.0	0	\$18,925	\$164,394	\$500	\$163,894	8.7	78,886
Lighting Control Measures			163	0.0	0	\$39	\$540	\$70	\$470	12.2	160
ECM 2	Install Occupancy Sensor Lighting Controls	Yes	163	0.0	0	\$39	\$540	\$70	\$470	12.2	160
HVAC S	ystem Improvements		506	0.0	1	\$140	\$2,680	\$440	\$2,240	16.0	630
ECM 3	Install Pipe Insulation	No	506	0.0	1	\$140	\$2,680	\$440	\$2,240	16.0	630
Domest	ic Water Heating Upgrade		0	0.0	2	\$28	\$4,222	\$302	\$3,920	142.4	182
ECM 4	Install Tankless Water Heater	No	0	0.0	1	\$25	\$4,215	\$300	\$3,915	156.3	166
ECM 5	Install Low-Flow DHW Devices	Yes	0	0.0	0	\$2	\$7	\$2	\$5	2.1	16
Custom Measures			1,011	0.0	0	\$244	\$2,383	\$0	\$2,383	9.8	1,018
ECM 6	Replace Electric Water Heater with Heat Pump Water Heater	Yes	1,011	0.0	0	\$244	\$2,383	\$0	\$2,383	9.8	1,018
	TOTALS		80,018	0.0	3	\$19,376	\$174,220	\$1,312	\$172,908	8.9	80,876

^{* -} All incentives presented in this table are included as placeholders for planning purposes and are based on previously run state rebate programs. Contact your utility provider for details on current programs.

Figure 6 – All Evaluated ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	Lighting Upgrades			0	\$18,925	\$164,394	\$500	\$163,894	8.7	78,886
ECM 1	ECM 1 Install LED Fixtures		0.0	0	\$18,925	\$164,394	\$500	\$163,894	8.7	78,886
Lighting	Lighting Control Measures		0.0	0	\$39	\$540	\$70	\$470	12.2	160
ECM 2	Install Occupancy Sensor Lighting Controls	163	0.0	0	\$39	\$540	\$70	\$470	12.2	160
Domest	ic Water Heating Upgrade	0	0.0	0	\$2	\$7	\$2	\$5	2.1	16
ECM 5	Install Low-Flow DHW Devices	0	0.0	0	\$2	\$7	\$2	\$5	2.1	16
Custom	Custom Measures		0.0	0	\$244	\$2,383	\$0	\$2,383	9.8	1,018
ECM 6	Replace Electric Water Heater with Heat Pump Water Heater	1,011	0.0	0	\$244	\$2,383	\$0	\$2,383	9.8	1,018
	TOTALS	79,512	0.0	0	\$19,211	\$167,325	\$572	\$166,753	8.7	80,080

^{* -} All incentives presented in this table are included as placeholders for planning purposes and are based on previously run state rebate programs. Contact your utility provider for details on current programs.

Figure 7 – Cost Effective ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	_		Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	g Upgrades	78,338	0.0	0	\$18,925	\$164,394	\$500	\$163,894	8.7	78,886
ECM 1	Install LED Fixtures	78,338	0.0	0	\$18,925	\$164,394	\$500	\$163,894	8.7	78,886

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources is proposed, we suggest converting all of a specific lighting type (e.g., linear fluorescent) to LED lamps to minimize the number of lamp types in use at the facility, which should help reduce future maintenance costs.

ECM 1: Install LED Fixtures

Replace existing fixtures containing HID metal halide lamps with new LED light fixtures. This measure saves energy by installing LEDs, which use less power than other technologies with a comparable light output.

In some cases, HID fixtures can be retrofit with screw-based LED lamps. Replacing an existing HID fixture with a new LED fixture will generally provide better overall lighting optics; however, replacing the HID lamp with a LED screw-in lamp is typically a less expensive retrofit. We recommend you work with your lighting contractor to determine which retrofit solution is best suited to your needs and will be compatible with the existing fixtures.

Maintenance savings may also be achieved since LED lamps last longer than other light sources and therefore do not need to be replaced as often.

NOTE: Recall Musco Lighting will ultimately be responsible for the replacement of the field lighting.

Affected Building Areas: field lighting and the exterior picnic canopy area.

4.2 Lighting Controls

#	Energy Conservation Measure		Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Net M&L	-	CO₂e Emissions Reduction (lbs)
Lighting	g Control Measures	163	0.0	0	\$39	\$540	\$70	\$470	12.2	160
ECM 2	Install Occupancy Sensor Lighting Controls	163	0.0	0	\$39	\$540	\$70	\$470	12.2	160

Lighting controls reduce energy use by turning off or lowering lighting fixture power levels when not in use. A comprehensive approach to lighting design should upgrade the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.





ECM 2: Install Occupancy Sensor Lighting Controls

Install occupancy sensors to control lighting fixtures in areas that are frequently unoccupied, even for short periods. For most spaces, we recommend that lighting controls use dual technology sensors, which reduce the possibility of lights turning off unexpectedly.

Occupancy sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Most occupancy sensor lighting controls allow users to manually turn fixtures on/off, as needed. Some controls can also provide dimming options.

Occupancy sensors can be mounted on the wall at existing switch locations, mounted on the ceiling, or in remote locations. In general, wall switch replacement sensors are best suited to single occupant offices and other small rooms. Ceiling-mounted or remote mounted sensors are used in large spaces, locations without local switching, and where wall switches are not in the line-of-sight of the main work area.

This measure provides energy savings by reducing the lighting operating hours.

Affected Building Areas: restrooms.

4.3 HVAC Improvements

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Estimated Net M&L Cost (\$)		CO₂e Emissions Reduction (lbs)
HVAC S	ystem Improvements	506	0.0	1	\$140	\$2,680	\$440	\$2,240	16.0	630
ECM 3	Install Pipe Insulation	506	0.0	1	\$140	\$2,680	\$440	\$2,240	16.0	630

ECM 3: Install Pipe Insulation

We evaluated the installation of insulation on domestic hot water system piping. Distribution system losses are dependent on system fluid temperature, the size of the distribution system, and the level of insulation of the piping. Significant energy savings can be achieved when insulation has not been well maintained. When the insulation is exposed to water, when the insulation has been removed from some areas of the pipe, or when valves have not been properly insulated system efficiency can be significantly reduced. This measure saves energy by reducing heat transfer in the distribution system. Savings potential is limited because hot water demand is low and distribution line losses are minimal because there are no circulation pumps.

Affected Systems: DHW piping.





4.4 Domestic Water Heating

#	Energy Conservation Measure		Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Net M&L		CO ₂ e Emissions Reduction (lbs)
Domes	tic Water Heating Upgrade	0	0.0	2	\$28	\$4,222	\$302	\$3,920	142.4	182
ECM 4	Install Tankless Water Heater	0	0.0	1	\$25	\$4,215	\$300	\$3,915	156.3	166
ECM 5	Install Low-Flow DHW Devices	0	0.0	0	\$2	\$7	\$2	\$5	2.1	16

ECM 4: Install Tankless Water Heater

We evaluated replacing the existing tank water heater with a high efficiency condensing tankless water heating system. Tankless water heaters (i.e., on-demand water heaters) only heat water when hot water is needed. Water is heated as it flows through the pipe to the hot water tap. Energy savings from a tankless water heater are based on eliminating heat losses associated with maintaining unnecessary standby hot water capacity.

Since the existing heater has failed, the site might want to consider the marginal (added) cost of a condensing tankless heater as compared to a standard unit.

ECM 5: Install Low-Flow DHW Devices

Install low-flow devices to reduce overall hot water demand. The following low-flow devices are recommended to reduce hot water usage:

Device	Flow Rate
Faucet aerators (lavatory)	0.5 gpm
Faucet aerator (kitchen)	1.5 gpm
Showerhead	2.0 gpm
Pre-rinse spray valve (kitchen)	1.28 gpm

Low-flow devices reduce the overall water flow from the fixture, while still providing adequate pressure for washing.

Additional cost savings may result from reduced water usage.





4.5 Custom Measures

#	Energy Conservation Measure			Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated M&L Cost (\$)	Estimated Incentive (\$)*	Net M&L		CO₂e Emissions Reduction (lbs)
Custom	ı Measures	1,011	0.0	0	\$244	\$2,383	\$0	\$2,383	9.8	1,018
TECIM 6	Replace Electric Water Heater with Heat Pump Water Heater	1,011	0.0	0	\$244	\$2,383	\$0	\$2,383	9.8	1,018

CM 6: Replace Electric Water Heater with Heat Pump Water Heater

A typical electric water heater uses electric resistance coils to heat water at a coefficient of performance (COP) of 1. Air source heat pump water heaters (HPWH) use a refrigeration cycle to transfer heat from the surrounding air to the domestic water. The typical average COP for a HPWH is about 2.5, so they require significantly less electricity to produce the same amount of hot water as a traditional electric water heater. There are two types of HPWH, those integrated with the heat pump and storage tank in the same unit, and those that are split into two sections (with the storage tank separate from the heat pump). The following addresses integrated HPWH.

HPWH reject cold air. As such, they need to be installed in an unconditioned space of about 750 cubic feet with good ventilation. Ideal locations are garages, large enclosed, unconditioned storage areas, or areas with excess heat such as a furnace or boiler room.⁴ The HPWH will also produce condensate so accommodations for draining the condensate need to be provided.

Most HPWH operate effectively down to an air temperature of 40 °F. Below that temperature, an electric resistance booster heater is typically required to achieve full heating capacity. It is critical that the HPWH controls are set up so that the electric resistance heat only engages when the air temperature is too cold for the HPWH to extract heat from it. HPWHs have a slow recovery. During periods of high demand, the electric resistance heating element, if enabled, may be energized to maintain set point, thus reducing the overall efficiency of the unit. It is recommended that a careful analysis of the hot water demand be conducted to determine if the application makes economic sense, and the HPWH heating capacity and storage are properly sized.

HPWH operate most effectively when the temperature difference between the incoming and outgoing water is high. Generally, this means that cold make-up water should be piped to the bottom of the tank and return water should be piped to the top of the tank in order to maintain stratification within the storage tank. Water should be drawn from the bottom of the tank to be heated. If there is a DHW recirculation pump, it should only be operated during high hot water demand periods.

⁴https://basc.pnnl.gov/code-compliance/heat-pump-water-heaters-code-compliance-brief#:~:text=HPWH%20must%20have%20unrestricted%20airflow,depending%20on%20size%20of%20system





4.6 Measures for Future Consideration

There are additional opportunities for improvement that Columbus Park may wish to consider. These potential upgrades typically require further analysis, involve substantial capital investment, and/or include significant system reconfiguration. These measure(s) are therefore beyond the scope of this energy audit. These measure(s) are described here to support a whole building approach to energy efficiency and sustainability.

Columbus Park may wish to consider the Energy Savings Improvement Program (ESIP) or other whole building approach. With interest in implementing comprehensive, largescale and/or complex system wide projects, these measures may be pursued during development of a future energy savings plan. We recommend that you work with your energy service company (ESCO) and/or design team to:

- Evaluate these measures further.
- Develop firm costs.
- Determine measure savings.
- Prepare detailed implementation plans.

Other modernization or capital improvement funds may be leveraged for these types of refurbishments. As you plan for capital upgrades, be sure to consider the energy impact of the building systems and controls being specified.

Upgrade to a Heat Pump System

An electric furnace or boiler has no flue loss through a chimney. The AFUE rating for an all-electric furnace or boiler is between 95% and 100%. The lower values are for units installed outdoors because they have greater jacket heat loss. However, despite their high efficiency, the higher cost of electricity in most parts of the country makes all-electric furnaces or boilers an uneconomic choice. If you are interested in electric heating, consider installing a heat pump system.

Electric resistance heat, including electric furnaces and baseboard heaters, can be inexpensive to install but often expensive to run. Facilities with these systems can save substantial energy at a moderate cost by installing a heat pump when they replace a central air conditioner. Even in buildings without central air-conditioning, there are opportunities to save energy when an existing electric furnace needs to be replaced, as well as opportunities to install ductless electric heat pumps in buildings with baseboard electric heaters. Electric heat pumps have high coefficient of performance (COP) ratings and are substantially more efficient than traditional electric heating systems. Further investigation is required to determine whether installing a heat pump system is a cost-effective solution when replacing existing electrical heating systems.

The facility has a gas-fired unit heater and a failed gas tankless water heater. It would be possible for this site to eliminate gas use entirely with a "mini split" type heat pump and an electric tankless water heater. An added benefit of a mini split heat pump would be that cooling as well as heating would be available to the site, and it could be provided to multiple locations.





5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs.

Operation and maintenance (O&M) plans enhance the operational efficiency of HVAC and other energy intensive systems and could save 5% –20% of the energy usage in your building without substantial capital investment. A successful plan includes your records of energy usage trends and costs, building equipment lists, current maintenance practices, and planned capital upgrades, and it incorporates your ideas for improved building operation. Your plan will address goals for energy-efficient operation, provide detail on how to reach the goals, and outline procedures for measuring and reporting whether goals have been achieved.

You may already be doing some of these things—see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR Portfolio Manager



You've heard it before—you cannot manage what you do not measure. ENERGY STAR Portfolio Manager is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions⁵. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

Weatherization

Caulk or weather strip leaky doors and windows to reduce drafts and loss of heated or cooled air. Sealing cracks and openings can reduce heating and cooling costs, improve building durability, and create a healthier indoor environment. Materials used may include caulk, polyurethane foam, and other weatherstripping materials. There is an energy savings opportunity by reducing the uncontrolled air exchange between the outside and inside of the building. Blower door assisted comprehensive building air sealing will reduce the amount of air exchange, which will in turn reduce the load on the buildings heating and cooling equipment, providing energy savings and increased occupant comfort.

Doors and Windows

Close exterior doors and windows in heated and cooled areas. Leaving doors and windows open leads to a loss of heat during the winter and chilled air during the summer. Reducing air changes per hour can lead to increased occupant comfort as well as heating and cooling savings, especially when combined with proper HVAC controls and adequate ventilation.

⁵ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager.





Lighting Maintenance



Clean lamps, reflectors and lenses of dirt, dust, oil, and smoke buildup every six to twelve months. Light levels decrease over time due to lamp aging, lamp and ballast failure, and buildup of dirt and dust. Together, this can reduce total light output by up to 60% while still drawing full power.

In addition to routine cleaning, developing a maintenance schedule can ensure that maintenance is performed regularly, and it can reduce the overall cost of fixture re-

lamping and re-ballasting. Group re-lamping and re-ballasting maintains lighting levels and minimizes the number of site visits by a lighting technician or contractor, decreasing the overall cost of maintenance.

Fans to Reduce Cooling Load

Install ceiling fans to supplement your cooling system. Thermostat settings can typically be increased by 4°F with no change in overall occupant comfort due to the wind chill effect of moving air.

HVAC Filter Cleaning and Replacement

Air filters should be checked regularly (often monthly) and cleaned or replaced when appropriate. Air filters reduce indoor air pollution, increase occupant comfort, and help keep equipment operating efficiently. If the building has a building management system, consider installing a differential pressure switch across filters to send an alarm about premature fouling or overdue filter replacement. Over time, filters become less, and less effective as particulate buildup increases. Dirty filters also restrict air flow through the air conditioning or heat pump system, which increases the load on the distribution fans.

Water Heater Maintenance

The lower the supply water temperature that is used for hand washing sinks, the less energy is needed to heat the water. Reducing the temperature results in energy savings and the change is often unnoticeable to users. Be sure to review the domestic water temperature requirements for sterilizers and dishwashers as you investigate reducing the supply water temperature.

Also, preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.
- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.





Water Conservation



Installing dual flush or low-flow toilets and low-flow/waterless urinals are ways to reduce water use. The EPA WaterSense® ratings for urinals is 0.5 gallons per flush (gpf) and for flush valve toilets is 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

For more information regarding water conservation go to the EPA's WaterSense website⁶ or download a copy of EPA's "WaterSense at Work: Best Management Practices for Commercial and Institutional Facilities" to get ideas for creating a water

management plan and best practices for a wide range of water using systems.

Water conservation devices that do not reduce hot water consumption will not provide energy savings at the site level, but they may significantly affect your water and sewer usage costs. Any reduction in water use does however ultimately reduce grid-level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users.

If the facility has detached buildings with a master water meter for the entire campus, check for unnatural wet areas in the lawn or water seeping in the foundation at water pipe penetrations through the foundation. Periodically check overnight meter readings when the facility is unoccupied, and there is no other scheduled water usage.

Manage irrigation systems to use water more effectively outside the building. Adjust spray patterns so that water lands on intended lawns and plantings and not on pavement and walls. Consider installing an evapotranspiration irrigation controller that will prevent over-watering.

Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR or WaterSense products where available.

⁶ https://www.epa.gov/watersense.

⁷ https://www.epa.gov/watersense/watersense-work-0.





You don't have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the facility's electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions, and reduced customer electricity purchases, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a cost-effective solution for your facility. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.





6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has no potential for installing a PV array.

This facility does not appear to meet the minimum criteria for a cost-effective solar PV installation. To be cost-effective, a solar PV array needs certain minimum criteria, such as sufficient and sustained electric demand and sufficient unshaded space on which to place the PV panels.

The graphic below displays the results of the PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

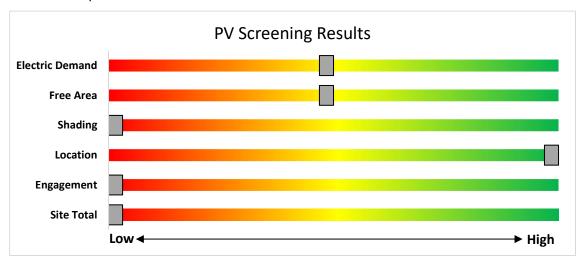


Figure 8 - Photovoltaic Screening





Successor Solar Incentive Program (SuSI)

The SuSI program replaces the SREC Registration Program (SRP) and the Transition Incentive (TI) program. The SuSI program is used to register and certify solar projects in New Jersey. Rebates are not available for solar projects. Solar projects may qualify to earn SREC- IIs (Solar Renewable Energy Certificates-II), however, the project owners *must* register their solar projects prior to the start of construction to establish the project's eligibility.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

Successor Solar Incentive Program (SuSI): https://www.njcleanenergy.com/renewable-energy/programs/susi-program

- Basic Info on Solar PV in NJ: www.njcleanenergy.com/whysolar
- **NJ Solar Market FAQs**: <u>www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs</u>.
- Approved Solar Installers in the NJ Market: www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1





6.2 Combined Heat and Power

Combined heat and power (CHP) generates electricity at the facility and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.

CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has no potential for installing a cost-effective CHP system.

Based on a preliminary analysis, the facility does not appear to meet the minimum requirements for a cost-effective CHP installation. The low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

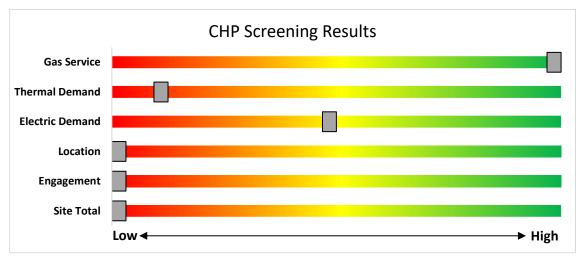


Figure 9 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/





7 ELECTRIC VEHICLES (EV)

All electric vehicles (EVs) have an electric motor instead of an internal combustion engine. EVs function by plugging into a charge point, taking electricity from the grid, and then storing it in rechargeable batteries. Although electricity production may contribute to air pollution, the U.S. EPA categorizes allelectric vehicles as zero-emission vehicles because they produce no direct exhaust or tailpipe emissions.

EVs are typically more expensive than similar conventional and hybrid vehicles, although some cost can be recovered through fuel savings, federal tax credit, or state incentives.

7.1 Electric Vehicle Charging

EV charging stations provide a means for electric vehicle operators to recharge their batteries at a facility. While many EV drivers charge at home, others do not have access to regular home charging, and the ability to charge at work or in public locations is critical to making EVs practical for more drivers. Charging can also be used for electric fleet vehicles, which can reduce fuel and maintenance costs for fleets that replace gas or diesel vehicles with EVs.

EV charging comes in three main types. For this assessment, the screening considers addition of Level 2 charging, which is most common at workplaces and other public locations. Depending on the site type

and usage, other levels of charging power may be more appropriate.

The preliminary assessment of EV charging at the facility shows that there is medium potential for adding EV chargers to the facility's parking, based on potential costs of installation and other site factors.

The primary costs associated with installing EV charging are the charger hardware and the cost to extend power from the facility to parking spaces. This may include upgrades to electric panels to serve increased loads.

The type and size of the parking area impact the costs and feasibility of adding EV charging. Parking structure installations can be less costly than surface lot installations as power may be

readily available, and equipment and wiring can be surface mounted. Parking lot installations often require trenching through concrete or asphalt surface. Large parking areas provide greater flexibility in charger siting than smaller lots.

The location and capacity of facility electric panels also impact charger installation costs. A Level 2 charger generally requires a dedicated 208-240V, 40 Amp circuit. The electric panel nearest the planned installation may not have available capacity and may need to be upgraded to serve new EV charging loads. Alternatively, chargers could be powered from a more distant panel. The distance from the panel to the location of charging stations ties directly to costs, as conduits, cables, and potential trenching costs all increase on a per-foot basis. The more charging stations planned, the more likely it is that additional electrical capacity will be needed.

Other factors to consider when planning for EV charging at a facility include who the intended users are, how long they park vehicles at the site, and whether they will need to pay for the electricity they use.







The graphic below displays the results of the EV charging assessment conducted as part of this audit. The position of each slider indicates the impact each factor has on the feasibility of installing EV charging at the site.

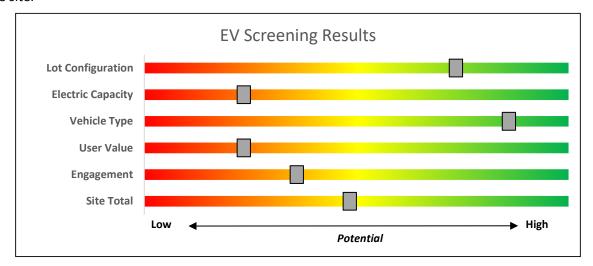


Figure 10 – EV Charger Screening

Electric Vehicle Programs Available

New Jersey is leading the way on electric vehicle (EV) adoption on the East Coast. There are several programs designed to encourage EV adoption in New Jersey, which is crucial to reaching a 100% clean energy future.

NJCEP offers a variety of EV programs for vehicles, charging stations, and fleets. Certain EV charging stations that receive electric utility service from Atlantic City Electric Company (ACE) or Public Service Electric & Gas Company (PSE&G), may be eligible for additional electric vehicle charging incentives directly from the utility. Projects may be eligible for both the incentives offered by this BPU program and incentives offered by ACE or PSE&G, up to 90% of the combined charger purchase and installation costs. Please check ACE or PSE&G program eligibility requirements before purchasing EV charging equipment, as additional conditions on types of eligible chargers may apply for utility incentives.

Both Jersey Central Power & Light (JCP&L) and Rockland Electric (RECO) have filed proposals for EV charging programs. BPU staff is currently reviewing those proposals.

For more information and to keep up to date on all EV programs please visit https://www.njcleanenergy.com/commercial-industrial/programs/electric-vehicle-programs





8 PROJECT FUNDING AND INCENTIVES

Ready to improve your building's performance? New Jersey's Clean Energy Programs and Utility Energy Efficiency Programs can help. Pick the program that works best for you. This section provides an overview of currently available incentive programs in.





Program areas staying with NJCEP:

- New Construction (residential, commercial, industrial, government)
- · Large Energy Users
- · Combined Heat & Power & Fuel Cells
- · State Facilities
- Local Government Energy Audits
- · Energy Savings Improvement Program
- Solar & Community Solar





8.1 Utility Energy Efficiency Programs

The Clean Energy Act, signed into law by Governor Murphy in 2018, requires New Jersey's investor-owned gas and electric utilities to reduce their customers' use by set percentages over time. To help reach these targets the New Jersey Board of Public Utilities approved a comprehensive suite of energy efficiency programs to be run by the utility companies.

Prescriptive and Custom

The Prescriptive and Custom rebate program through your utility provider offers incentives for installing prescriptive and custom energy efficiency measures at your facility. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

Equipment Examples

Lighting
Lighting Controls
HVAC Equipment
Refrigeration
Gas Heating
Gas Cooling
Commercial Kitchen Equipment
Food Service Equipment

Variable Frequency Drives
Electronically Commutate Motors
Variable Frequency Drives
Plug Loads Controls
Washers and Dryers
Agricultural
Water Heating

The Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type. The Custom program provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives.

Direct Install

Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW or less over the recent 12-month period. You work directly with a pre-approved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives, and controls

Incentives

The program pays up to 70% of the total installed cost of eligible measures.

How to Participate

To participate in Direct Install, you will work with a participating contractor. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the Direct Install program, subject to program rules and eligibility, while the remaining percent of the cost is paid to the contractor by the customer.





Engineered Solutions

The Engineered Solutions Program provides tailored energy-efficiency assistance and services to municipalities, universities, schools, hospitals and healthcare facilities (MUSH), non-profit entities, and multifamily buildings. Customers receive expert guided services, including investment-grade energy auditing, engineering design, installation assistance, construction administration, commissioning, and measurement and verification (M&V) services to support the implementation of cost-effective and comprehensive efficiency projects. Engineered Solutions is generally a good option for medium to large sized facilities with a peak demand over 200 kW looking to implement as many measures as possible under a single project to achieve deep energy savings. Engineered Solutions has an added benefit of addressing measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program loan also use this program. Incentives for this program are based on project scope and energy savings achieved.

For more information on any of these programs, contact your local utility provider or visit https://www.njcleanenergy.com/transition.





8.2 New Jersey's Clean Energy Programs

Save money while saving the planet! New Jersey's Clean Energy Program is a statewide program that offers incentives, programs, and services that benefit New Jersey residents, businesses, educational, non-profit, and government entities to help them save energy, money, and the environment.

Large Energy Users

The Large Energy Users Program (LEUP) is designed to foster self-directed investment in energy projects. This program is offered to New Jersey's largest energy customers that annually contribute at least \$200,000 to the NJCEP aggregate of all buildings/sites. This equates to roughly \$5 million in energy costs in the prior fiscal year.

Incentives

Incentives are based on the specifications below. The maximum incentive per entity is the lesser of:

- \$4 million
- 75% of the total project(s) cost
- 90% of total NJCEP fund contribution in previous year
- \$0.33 per projected kWh saved; \$3.75 per projected Therm saved annually

How to Participate

To participate in LEUP, you will first need submit an enrollment application. This program requires all qualified and approved applicants to submit an energy plan that outlines the proposed energy efficiency work for review and approval. Applicants may submit a Draft Energy Efficiency Plan (DEEP), or a Final Energy Efficiency Plan (FEEP). Once the FEEP is approved, the proposed work can begin.

Detailed program descriptions, instructions for applying, and applications can be found at www.njcleanenergy.com/LEUP.





Combined Heat and Power

The Combined Heat & Power (CHP) program provides incentives for eligible CHP or waste heat to power (WHP) projects. Eligible CHP or WHP projects must achieve an annual system efficiency of at least 65% (lower heating value, or LHV), based on total energy input and total utilized energy output. Mechanical energy may be included in the efficiency evaluation.

Incentives

Eligible Technologies	Size (Installed Rated Capacity) ¹	Incentive (\$/kW)	% of Total Cost Cap per Project ³	\$ Cap per Project ³
Powered by non- renewable or renewable fuel source ⁴	≤500 kW	\$2,000	30-40% ²	\$2 million
Gas Internal Combustion Engine	>500 kW - 1 MW	\$1,000		
Gas Combustion Turbine	> 1 MW - 3 MW	\$550		
Microturbine Fuel Cells with Heat Recovery	>3 MW	\$350	30%	\$3 million
Waste Heat to	<1 MW	\$1,000	30%	\$2 million
Power*	> 1MW	\$500	50 /6	\$3 million

^{*}Waste Heat to Power: Powered by non-renewable fuel source, heat recovery or other mechanical recovery from existing equipment utilizing new electric generation equipment (e.g. steam turbine).

Check the NJCEP website for details on program availability, current incentive levels, and requirements.

How to Participate

You will work with a qualified developer or consulting firm to complete the CHP application. Once the application is approved the project can be installed. Information about the CHP program can be found at www.njcleanenergy.com/CHP.





<u>Successor Solar Incentive Program (SuSI)</u>

The SuSI program replaces the SREC Registration Program (SRP) and the Transition Incentive (TI) program. The program is used to register and certify solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SREC-IIs (Solar Renewable Energy Certificates-II). SuSI consists of two subprograms. The Administratively Determined Incentive (ADI) Program and the Competitive Solar Incentive (CSI) Program.

Administratively Determined Incentive (ADI) Program

The ADI Program provides administratively set incentives for net metered residential projects, net metered non-residential projects 5 MW or less, and all community solar projects.

After the registration is accepted, construction is complete, and a complete final as-built packet has been submitted, the project is issued a New Jersey certification number, which enables it to generate New Jersey SREC- IIs.

Market Segments	Size MW dc	Incentive Value (\$/SREC II)	Public Entities Incentive Value - \$20 Adder (\$/SRECII)
Net Metered Residential	All types and sizes	\$90	N/A
Small Net Metered Non-Residential located on Rooftop, Carport, Canopy and Floating Solar	Projects smaller than 1 MW	\$100	\$120
Large Net Metered Non-Residential located on Rooftop, Carport, Canopy and Floating Solar	Projects 1 MW to 5 MW	\$90	\$110
Small Net Metered Non-Residential Ground Mount	Projects smaller than 1 MW	\$85	\$105
Large Net Metered Non-Residential Ground Mount	Projects 1 MW to 5 MW	\$80	\$100
LMI Community Solar	Up to 5 MW	\$90	N/A
Non-LMI Community Solar	Up to 5 MW	\$70	N/A
Interim Subsection (t)	All types and sizes	\$100	N/A

Eligible projects may generate SREC-IIs for 15 years following the commencement of commercial operations which is defined as permission to operate (PTO) from the Electric Distribution Company. After 15 years, projects may be eligible for a NJ Class I REC.

SREC-IIs will be purchased monthly by the SREC-II Program Administrator who will allocate the SREC-IIs to the Load Serving Entities (BGS Providers and Third-Party Suppliers) annually based on their market share of retail electricity sold during the relevant Energy Year.

The ADI Program online portal is now open to new registrations.

Competitive Solar Incentive Program

The Competitive Solar Incentive (CSI) Program will provide competitively set incentives for grid supply projects and net metered non-residential projects greater than 5MW (dc). The program is currently under development. For updates, please continue to check the <u>Solar Proceedings</u> page on the New Jersey's Clean Energy Program website.

Solar projects help the State of New Jersey reach renewable energy goals outlined in the state's Energy Master Plan

If you are considering installing solar photovoltaics on your building, visit the following link for more information: https://njcleanenergy.com/renewable-energy/programs/susi-program.





Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities, and other public and state entities enter into contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the energy conservation measures (ECMs), ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an energy services company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program descriptions and application can be found at www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.





9 PROJECT DEVELOPMENT

Energy conservation measures (ECMs) have been identified for your site, and their energy and economic analyses are provided within this LGEA report. Note that some of the identified projects may be mutually exclusive, such as replacing equipment versus upgrading motors or controls. The next steps with project development are to set goals and create a comprehensive project plan. The graphic below provides an overview of the process flow for a typical energy efficiency or renewable energy project. We recommend implementing as many ECMs as possible prior to undertaking a feasibility study for a renewable project. The cyclical nature of this process flow demonstrates the ongoing work required to continually improve building energy efficiency over time. If your building(s) scope of work is relatively simple to implement or small in scope, the measurement and verification (M&V) step may not be required. It should be noted through a typical project cycle, there will be changes in costs based on specific scopes of work, contractor selections, design considerations, construction, etc. The estimated costs provided throughout this LGEA report demonstrate the unburdened turn-key material and labor cost only. There will be contingencies and additional costs at the time of implementation. We recommend comprehensive project planning that includes the review of multiple bids for project work, incorporates potential operations and maintenance (O&M) cost savings, and maximizes your incentive potential.

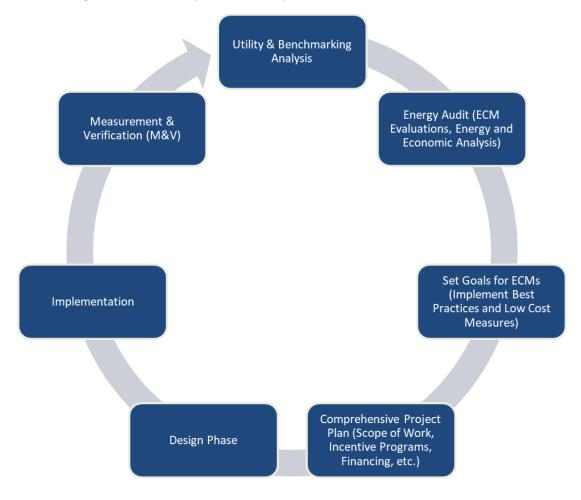


Figure 11 - Project Development Cycle





10 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

10.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. Though you may choose a different company from which to buy your electric power, responsibility for your facility's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website⁸.

10.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market based and fluctuate monthly. The utility provides basic gas supply service to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website⁹.

⁸ www.state.nj.us/bpu/commercial/shopping.html.

⁹ www.state.nj.us/bpu/commercial/shopping.html.





APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & F	inancial A	Analysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixtur e	Annual Operatin g Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixtur e	Annual Operatin g Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Grounds Building	19	LED - Fixtures: Linear Strip	Wall Switch	S	32	1,460		None	No	19	LED - Fixtures: Linear Strip	Wall Switch	32	1,460	0.0	0	0	\$0	\$0	\$0	0.0
Exterior Wall Pack	13	LED - Fixtures: Wall Pack	Photocell		25	4,380		None	No	13	LED - Fixtures: Wall Pack	Photocell	25	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Field Lighting	170	Metal Halide: (1) 1000W Lamp	Wall Switch		1,080	600	1	Fixture Replacement	No	170	LED - Fixtures: Large Pole/Arm- Mounted Area/Roadway Fixture	Wall Switch	324	600	0.0	77,112	0	\$18,629	\$162,949	\$0	8.7
Men's Restroom	7	LED - Fixtures: Downlight Recessed	Wall Switch	S	15	2,500	2	None	Yes	7	LED - Fixtures: Downlight Recessed	Occupanc y Sensor	15	1,725	0.0	81	0	\$19	\$270	\$35	12.2
Parking Lot Lights	15	LED - Fixtures : Outdoor Pole/Arm-Mounted Area/Roadway Fixture	Photocell		100	4,380		None	No	15	LED - Fixtures: Outdoor Pole/Arm- Mounted Area/Roadway Fixture	Photocell	100	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Picnic Canopy Area	10	Metal Halide: (2) 20W Lamp	Timeclock		40	4,380	1	Fixture Replacement	No	10	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timeclock	12	4,380	0.0	1,226	0	\$296	\$1,446	\$500	3.2
Picnic Canopy Area	8	LED - Fixtures: Wall Sconces	Timeclock		15	4,380		None	No	8	LED - Fixtures: Wall Sconces	Timeclock	15	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Women's Restroom	7	LED - Fixtures: Downlight Recessed	Wall Switch	S	15	2,500	2	None	Yes	7	LED - Fixtures: Downlight Recessed	Occupanc y Sensor	15	1,725	0.0	81	0	\$19	\$270	\$35	12.2





Motor Inventory & Recommendations

		Existing	g Conditions								Prop	osed Co	nditions		Energy Im	pact & Fir	nancial Ar	alysis			
Location	Area(s)/System(s) Served	Motor Quantit Y	Motor Application	HP Per Motor	Full Load Efficienc Y	VFD Control?	Manufacturer	Model	Remaining Useful Life	Annual Operating Hours	ECM #	Efficienc	Full Load Efficiency		Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings	M&I Cost	Total Incentives	Simple Payback w/ Incentives in Years
Restrooms	Exhaust Fan	2	Exhaust Fan	0.3	65.0%	No			W	2,745		No	65.0%	No	0.0	0	0	\$0	\$0	\$0	0.0
Grounds Building	Garage Door Opener	2	Other	0.3	65.0%	No	Lift Master		W	100		No	65.0%	No	0.0	0	0	\$0	\$0	\$0	0.0

Packaged HVAC Inventory & Recommendations

	-	Existing	Conditions								Prop	posed Conditions				Energy In	npact & Fi	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/IEER/ EER)	Heating Mode Efficiency	Manufacturer	Model	Remaining Useful Life	ECM #	Install High System Efficienc Quantit System Type y y System?	Cooling Capacit y per Unit (Tons)	Heating apacity er Unit (MBh)	Cooling Mode Efficiency (SEER/IEER/ EER) Heating Mode Efficiency	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings	Estimated M&L Cost (\$)		Simple Payback w/ Incentives in Years
Grounds Building	Unit Heater	1	Unit Heater		60.00		0.83 Et	Reznor		В		No				0.0	0	0	\$0	\$0	\$0	0.0

Pipe Insulation Recommendations

	<u> </u>	Reco	mmendat	tion Inputs	Energy In	npact & Fir	nancial Ar	alysis			
Location	Area(s)/System(s) Affected	ECM #	Length of Uninsulate d Pipe (ft)	Pipe Diameter (in)	Total Peak kW Savings	kWh	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Grounds Building	DHW 1-in Pipe	3	40	1.00	0.0	169	0	\$41	\$477	\$80	9.8
Grounds Building	DHW 1.5-in Pipe	3	40	1.50	0.0	169	0	\$41	\$533	\$80	11.1
Grounds Building	DHW .75-in PEX Pipe	3	100	0.75	0.0	0	1	\$18	\$1,193	\$200	54.2
Grounds Building	DHW .75-in Pipe	3	40	0.75	0.0	169	0	\$41	\$477	\$80	9.8

DHW Inventory & Recommendations

		Existin	g Conditions				Prop	osed Co	nditio	ns				Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit y	System Type	Manufacturer	Model	Remaining Useful Life		Replace?	System Quantit Y	System Type	Fuel Type			Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings			Simple Payback w/ Incentives in Years
Grounds Building	Instantaneous DHW	1	Tankless Water Heater	Rheem	RTG-84DVLN	В	4	Yes	1	Tankless Water Heater	Natural Gas	95.00%	Et	0.0	0	1	\$25	\$4,215	\$300	156.3
Grounds Building	Storage DHW	1	Storage Tank Water Heater (≤ 50 Gal)	Bradford White	M230L6DS- 1NCWW	В		No						0.0	0	0	\$0	\$0	\$0	0.0





Low-Flow Device Recommendations

	Reco	mmeda	ation Inputs			Energy In	pact & Fir	nancial An	alysis			
Location	ECM #	Device Quantit y	Device Type	Existing Flow Rate (gpm)	Proposed Flow Rate (gpm)	Total Peak kW Savings	kWh	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)	Total Incentives	Simple Payback w/ Incentives in Years
Grounds Building	5	1	Faucet Aerator (Kitchen)	2.00	1.50	0.0	0	0	\$2	\$7	\$2	2.1

Plug Load Inventory

	Existin	g Conditions				
Location	Quantit y	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified ?	Manufacturer	Model
Grounds Building	1	Desktop	270			
Grounds Building	1	Refrigerator (Residential)	220			

Custom (High Level) Measure Analysis

Electric Tank Water Heater to HPWH

NOTE: HPWH calculation should not be used for existing water heaters with a storage capacity greater than 120 gal.


TOTE. THE VITE CARCUICATION SHOULD HOUSE	o accounts containing mater mount		ago capacity gi																	
Existing Conditions						Proposed Conditions				Energy In	npact & Fi	nancial A	nalysis							
Description	Area(s)/System(s) Served	SF of Area Served	Fuel Type	Input Capacity per Unit (kW)	Tank Capacity per Unit (Gal)	Description	СОР	Tank Capacity per Unit (Gal)	Estimated Unit Cost	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Estimated M&L Cost (\$)		Enhanced Incentives	Total Incentives	Total Net	Payback w/o Incentives in Years	Payback w/ Incentives in Years
Storage Tank Water Heater (≤50 Gal)	Grounds Building	2,500	Electric	4.5	30	Heat Pump Water Heater	2.5	50	\$2,383.17	0.00	1,011	0	\$244	\$2,383	\$0	\$0	\$0	\$2,383	9.77	9.77
			Electric																	
			Electric																	





APPENDIX B: ENERGY STAR STATEMENT OF ENERGY PERFORMANCE

Energy use intensity (EUI) is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.

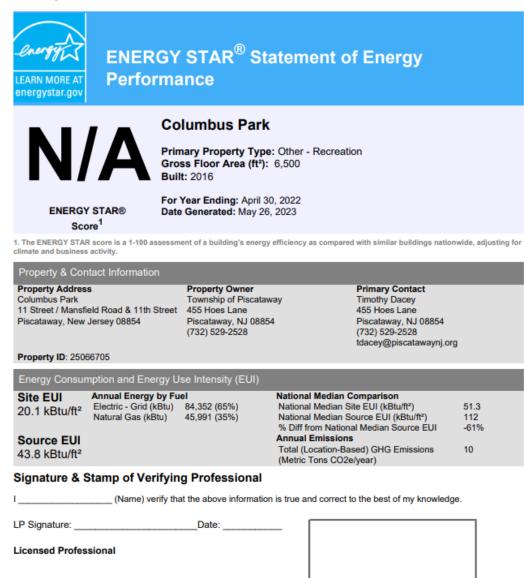

Professional Engineer or Registered Architect Stamp (if applicable)

APPENDIX C: GLOSSARY

TERM	DEFINITION
Blended Rate	Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour.
Btu	British thermal unit: a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit.
СНР	Combined heat and power. Also referred to as cogeneration.
СОР	Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input.
Demand Response	Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives.
DCV	Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need.
US DOE	United States Department of Energy
EC Motor	Electronically commutated motor
ЕСМ	Energy conservation measure
EER	Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input.
EUI	Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance.
Energy Efficiency	Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service.
ENERGY STAR	ENERGY STAR is the government-backed symbol for energy efficiency. The ENERGY STAR program is managed by the EPA.
EPA	United States Environmental Protection Agency
Generation	The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil).
GHG	Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.
gpf	Gallons per flush

gpm	Gallon per minute
HID	High intensity discharge: high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	Horsepower
HPS	High-pressure sodium: a type of HID lamp.
HSPF	Heating seasonal performance factor: a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	Heating, ventilating, and air conditioning
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	Integrated part load value: a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units
kW	Kilowatt: equal to 1,000 Watts.
kWh	Kilowatt-hour: 1,000 Watts of power expended over one hour.
LED	Light emitting diode: a high-efficiency source of light with a long lamp life.
LGEA	Local Government Energy Audit
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, which is implemented in a building system to reduce total energy consumption.
МН	Metal halide: a type of HID lamp.
MBh	Thousand Btu per hour
MBtu	One thousand British thermal units
MMBtu	One million British thermal units
MV	Mercury Vapor: a type of HID lamp.
NJBPU	New Jersey Board of Public Utilities
NJCEP	New Jersey's Clean Energy Program: NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money, and the environment.
psig	Pounds per square inch gauge
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	Photovoltaic: refers to an electronic device capable of converting incident light directly into electricity (direct current).
	of an ordinary AC plug. Photovoltaic: refers to an electronic device capable of converting incident light direct

SEER	Seasonal energy efficiency ratio: a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	Statement of energy performance: a summary document from the ENERGY STAR Portfolio Manager.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC (II)	Solar renewable energy credit: a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of $1/8^{\text{th}}$ of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use.
VAV	Variable air volume
VFD	Variable frequency drive: a controller used to vary the speed of an electric motor.
WaterSense®	The symbol for water efficiency. The WaterSense® program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.