Local Government Energy Audit Report

Lillian M. Dunfee Elementary School

October 31, 2019

Prepared for:

Barnegat Township School District
128 Barnegat Blvd. South
Barnegat, New Jersey 08005

Prepared by:

TRC
900 Route 9 North
Woodbridge, New Jersey 07095

Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information about financial incentives that may be available. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC Companies, Inc. reviewed the energy conservation measures and estimates of energy savings were reviewed for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated installation costs on our experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from RS Means. We encourage the owner of the facility to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on individual measures and conditions. TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state and federal requirements.

Copyright ©2019 TRC Companies, Inc. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.

Table of Contents

1 Executive Summary 1

1.1 Planning Your Project 4

Pick Your Installation Approach 4
More Options from Around the State 6

2 Existing Conditions 7

2.1 Site Overview 7
2.2 Building Occupancy 7
2.3 Building Envelope 8
2.4 Lighting Systems 9
2.5 Air Handling Systems 10

Unit Ventilators 10
Packaged Units 10
Air Conditioners 10

2.6 Heating Hot Water Systems 11
2.7 Building Energy Management Systems (EMS) 11
2.8 Domestic Hot Water 12
2.9 Food Service Refrigeration Equipment 13
2.10 Plug Load & Vending Machines 14
2.11 Water-Using Systems 14
2.12 On-Site Generation 14

3 Energy Use and Costs 15

3.1 Electricity 17
3.2 Natural Gas 18
3.3 Benchmarking 19

Tracking Your Energy Performance 20

4 Energy Conservation Measures 21

4.1 Lighting 24

ECM 1: Retrofit Fixtures with LED Lamps 24

4.2 Lighting Controls 24

ECM 2: Install Occupancy Sensor Lighting Controls 25
ECM 3: Install High/Low Lighting Controls 25

4.3 Variable Frequency Drives (VFD) 26

ECM 4: Install VFDs on Constant Volume (CV) Fans 26
ECM 5: Install VFDs on Heating Water Pumps 26

4.4 Electric Unitary HVAC 27

ECM 6: Install High-Efficiency Air Conditioning Units 27

4.5 Gas-Fired Heating 27

ECM 7: Install High-Efficiency Furnaces 27
4.6 Domestic Water Heating 28
ECM 8: Install High-Efficiency Gas-Fired Water Heater 28
ECM 9: Install Low-Flow DHW Devices 28
4.7 Food Service & Refrigeration Measures 29
ECM 10: Vending Machine Control 29
5 Energy Efficient Best Practices 30
Energy Tracking with ENERGY STAR® Portfolio Manager® 30
Lighting Controls 30
Thermostat Schedules and Temperature Resets 30
AC System Evaporator/Condenser Coil Cleaning 30
HVAC Filter Cleaning and Replacement 30
Boiler Maintenance 31
Furnace Maintenance 31
Water Heater Maintenance 31
Plug Load Controls 31
Computer Monitor Replacement 32
Water Conservation 32
Procurement Strategies 32
6 On-site Generation 33
6.1 Solar Photovoltaic 34
6.2 Combined Heat and Power 35
7 Project Funding and Incentives 36
7.1 SmartStart 37
7.2 Direct Install 38
7.3 Pay for Performance - Existing Buildings 39
7.4 Combined Heat and Power 40
7.5 Energy Savings Improvement Program 41
7.6 SREC Registration Program 42
8 Energy Purchasing and Procurement Strategies 43
8.1 Retail Electric Supply Options 43
8.2 Retail Natural Gas Supply Options 43
Appendix A: Equipment Inventory & Recommendations A-1
Appendix B: ENERGY STAR® Statement of Energy Performance B-1
Appendix C: Glossary C-1

1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Lillian M. Dunfee Elementary School. This report provides you with information about the Elementary School's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in the Elementary School. TRC conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and to help protect our environment by reducing statewide energy consumption.

BUILDING PERFORMANCE REPORT

Annual Utilities	Costs: $95,507 Electricity: 599,336 kWh Natural Gas: 18,560 Therms	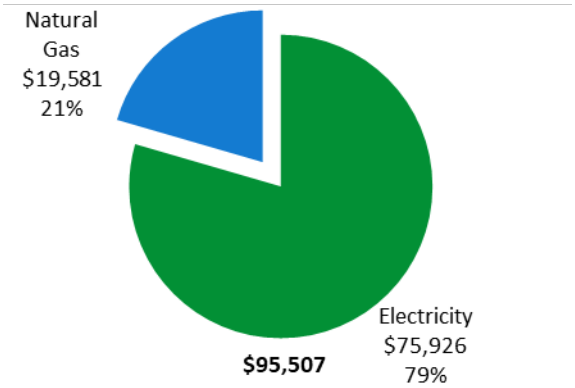
ENERGY STAR® Benchmarking Score	57 *(1-100 scale)*	Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance and lower your energy bills even more.

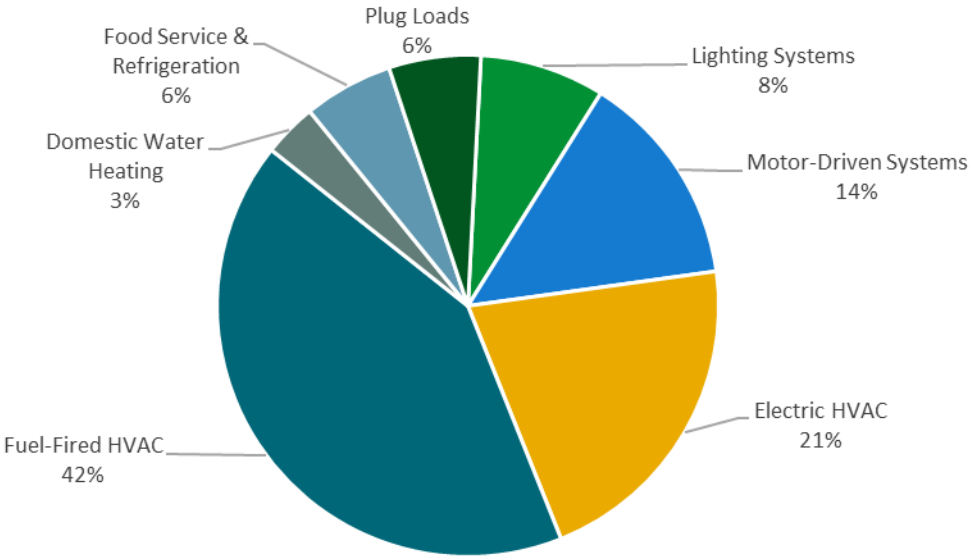

Figure 1 - Energy Use by System

POTENTIAL IMPROVEMENTS

This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.

Scenario 1: Full Package (all evaluated measures)

Installation Cost	$446,578
Potential Rebates & Incentives[1]	$13,664
Annual Cost Savings	$10,623
Annual Energy Savings	Electricity: 68,435 kWh Natural Gas: 1,852 Therms
Greenhouse Gas Emission Savings	45 Tons
Simple Payback	40.8 Years
Site Energy Savings (all utilities)	11%

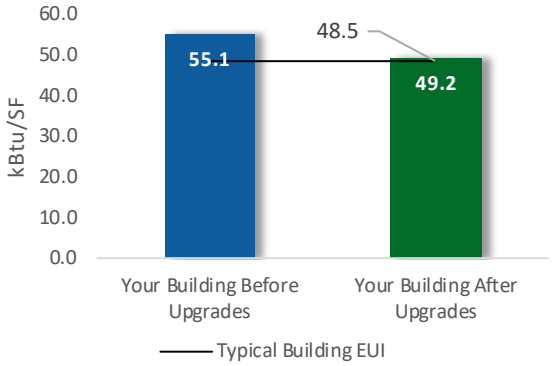

Scenario 2: Cost Effective Package[2]

Installation Cost	$33,937
Potential Rebates & Incentives	$2,556
Annual Cost Savings	$6,152
Annual Energy Savings	Electricity: 46,381 kWh Natural Gas: 262 Therms
Greenhouse Gas Emission Savings	25 Tons
Simple Payback	5.1 Years
Site Energy Savings (all utilities)	5%

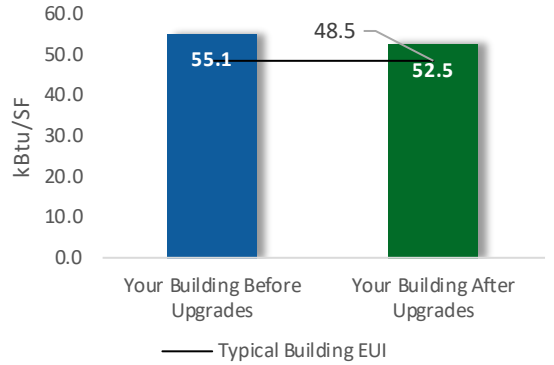

On-site Generation Potential

Photovoltaic	High
Combined Heat and Power	None

[1] Incentives are based on current SmartStart Prescriptive incentives. Other program incentives may apply.

[2] A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.

#	Energy Conservation Measure	*Cost effective?*	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Lighting Upgrades			**9,100**	**1.5**	**-1**	**$1,142**	**$3,485**	**$486**	**$2,999**	**2.6**	**9,043**
ECM 1	Retrofit Fixtures with LED Lamps	Yes	9,100	1.5	-1	$1,142	$3,485	$486	$2,999	2.6	9,043
Lighting Control Measures			**19,397**	**3.9**	**-4**	**$2,415**	**$16,910**	**$1,420**	**$15,490**	**6.4**	**19,058**
ECM 2	Install Occupancy Sensor Lighting Controls	Yes	16,213	3.3	-3	$2,018	$13,310	$1,420	$11,890	5.9	15,930
ECM 3	Install High/Low Lighting Controls	Yes	3,184	0.6	-1	$396	$3,600	$0	$3,600	9.1	3,129
Variable Frequency Drive (VFD) Measures			**16,272**	**3.1**	**0**	**$2,061**	**$13,154**	**$600**	**$12,554**	**6.1**	**16,386**
ECM 4	Install VFDs on Constant Volume (CV) Fans	Yes	7,759	2.1	0	$983	$4,761	$600	$4,161	4.2	7,813
ECM 5	Install VFDs on Heating Water Pumps	Yes	8,513	1.0	0	$1,079	$8,394	$0	$8,394	7.8	8,573
Electric Unitary HVAC Measures			**22,054**	**15.1**	**0**	**$2,794**	**$350,615**	**$7,608**	**$343,007**	**122.8**	**22,208**
ECM 6	Install High Efficiency Air Conditioning Units	No	22,054	15.1	0	$2,794	$350,615	$7,608	$343,007	122.8	22,208
Gas Heating (HVAC/Process) Replacement			**0**	**0.0**	**146**	**$1,539**	**$53,358**	**$3,200**	**$50,158**	**32.6**	**17,082**
ECM 7	Install High Efficiency Furnaces	No	0	0.0	146	$1,539	$53,358	$3,200	$50,158	32.6	17,082
Domestic Water Heating Upgrade			**0**	**0.0**	**44**	**$468**	**$8,826**	**$300**	**$8,526**	**18.2**	**5,197**
ECM 8	Install High Efficiency Gas-Fired Water Heater	No	0	0.0	13	$138	$8,669	$300	$8,369	60.7	1,530
ECM 9	Install Low-Flow DHW Devices	Yes	0	0.0	31	$330	$158	$0	$158	0.5	3,667
Food Service & Refrigeration Measures			**1,612**	**0.2**	**0**	**$204**	**$230**	**$50**	**$180**	**0.9**	**1,623**
ECM 10	Vending Machine Control	Yes	1,612	0.2	0	$204	$230	$50	$180	0.9	1,623
TOTALS (COST EFFECTIVE MEASURES)			**46,381**	**8.7**	**26**	**$6,152**	**$33,937**	**$2,556**	**$31,381**	**5.1**	**49,777**
TOTALS (ALL MEASURES)			**68,435**	**23.8**	**185**	**$10,623**	**$446,578**	**$13,664**	**$432,914**	**40.8**	**90,597**

* - All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

** - Simple Payback Period is based on net measure costs (i.e. after incentives).

Figure 2 – Evaluated Energy Improvements

For more detail on each evaluated energy improvement and a break out of cost-effective improvements, see **Section 4: Energy Conservation Measures**.

1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- How will the project be funded and/or financed?
- Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

New Jersey's Clean Energy Programs give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives before purchasing materials or starting installation.

The potential ECMs identified for this building likely qualify for multiple incentive and funding programs. Based on current program rules and requirements, your measures are likely to qualify for the following programs:

Energy Conservation Measure		SmartStart	Direct Install	Pay For Performance
ECM 1	Retrofit Fixtures with LED Lamps	x	x	
ECM 2	Install Occupancy Sensor Lighting Controls	x	x	
ECM 3	Install High/Low Lighting Controls	x	x	
ECM 4	Install VFDs on Constant Volume (CV) HVAC	x	x	
ECM 5	Install VFDs on Hot Water Pumps		x	
ECM 6	Install High Efficiency Electric AC	x	x	
ECM 7	Install High Efficiency Furnaces	x		
ECM 8	Install High Efficiency Gas Water Heater	x	x	
ECM 9	Install Low-Flow Domestic Hot Water Devices		x	
ECM 10	Vending Machine Control		x	

Figure 3 – Funding Options

New Jersey's Clean Energy Programs At-A-Glance

	SmartStart Flexibility to install at your own pace	**Direct Install** Turnkey installation	**Pay for Performance** Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together. Average peak demand should be below 200 kW. Not suitable for significant building shell issues.	Mid to large size facilities looking to implement as many measures as possible at one time. Peak demand should be over 200 kW.
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to $125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.

Individual Measures with SmartStart

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation.

Turnkey Installation with Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized network of participating contractors. This program can provide substantially higher incentives than SmartStart, up to 70% of the cost of selected measures. Direct Install contractors will assess and verify individual measure eligibility and, in most cases, they perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Whole Building Approach with Pay for Performance

Pay for Performance can be a good option for medium to large sized facilities to achieve deep energy savings. Pay for Performance allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program (ESIP) loan also use this program. Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures resulting in at least 15% energy savings, where lighting cannot make up the majority of the savings.

More Options from Around the State

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat & Power (CHP)

The CHP program provides incentives for combined heat and power (aka cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce electric demand during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.

2 EXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Lillian M. Dunfee Elementary School. This report provides information on how the Elementary School uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs. This report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see **Appendix A: Equipment Inventory & Recommendations.**

2.1 Site Overview

On July 10, 2019, TRC performed an energy audit at Lillian M. Dunfee Elementary School located in Barnegat, New Jersey. TRC met with Neil Piro to review the facility operations and help focus our investigation on specific energy-using systems.

Lillian M. Dunfee Elementary School is a one-story, 70,817 square foot building built in 1974. Spaces include: classrooms, a gymnasium, a cafeteria, corridors, offices, a kitchen, and a mechanical space.

In 2013, the Elementary School replaced all its existing fluorescent fixtures with LED linear tubes fixtures through the Direct Install program. The facility is 100% heated and cooled, and has onsite generation.

2.2 Building Occupancy

The Elementary School is occupied from September through June. Typical weekday occupancy is 80 staff and 947 students.

Building Name	Weekday/Weekend	Operating Schedule
Lillian M. Dunfee Elementary School	Weekday	6:00 AM - 6:30 PM
	Weekend	Saturday: 8:00 AM - 12:30 PM (Occasional) Sunday: No Operation

Figure 4 - Building Occupancy Schedule

2.3 Building Envelope

Building walls are concrete block over structural steel with a brick facade. The dividing walls are constructed from concrete masonry units. The roof is built-up, flat, and covered with stone ballast. It is in good condition.

All windows are double-glazed with aluminum frames and a thermal break. The glass-to-frame seals are in good condition. Exterior doors have aluminum frames and are in good condition with undamaged door seals.

Brick facade

Built up stone ballast roof

2.4 Lighting Systems

The primary interior lighting system uses 15-Watt LED linear tubes and 26-watt 4-pin compact fluorescent lamps. Fixture types include 2- or 3- lamp, 4-foot long troffers, and surface-mounted fixtures.

Most fixtures are in good condition. The gymnasium has T5 high-output high bay fixtures that are manually controlled. Most of the interior fixtures in the school are controlled by wall switches. The newer section classrooms and offices are controlled using occupancy sensors. All exit signs are LED units. Interior lighting levels were generally sufficient.

Exterior lighting is provided by wall-mounted and recessed fixtures with 26-watt 4-pin compact fluorescent lamps that are timeclock controlled.

Wall-mounted CFL

LED Exit Light

LED Linear Tubes

Dome Fixture in the Entrance

2.5 Air Handling Systems

Unit Ventilators

There are approximately eight pneumatically controlled unit ventilators with supply fan motors and outside air dampers. Hot water is circulated here from the boiler, and they distribute heat to the respective zones. This system is original to the building and appears to be in fair operating condition.

Packaged Units

The building has seven packaged units manufactured by AAON and Seasons 4. These units serve the gym, hallways, library, and computer lab. They have cooling capacities ranging from 13 to 30-ton and gas-fired furnaces with heating capacities ranging from 146 to 500 MBh. The average EER of these units is 9. Most of the units were installed between the years 2003 to 2008. These are past their useful life and have been evaluated for replacement.

The cafeteria is cooled using four York packaged units, each with a 7-ton cooling capacity. These units have an EER of 11.2 and were installed in 2019. These units are in good condition.

The space temperatures are controlled using an EMS. The cooling setpoints in the facility is between 68°F to 71°F.

Air Conditioners

The electrical room, server room and smaller office spaces are cooled using Mitsubishi and Intercity Products split AC units with cooling capacities between 1 to 3-tons and an average EER of 10.8. Most of these units are past their useful life and have been evaluated for replacement.

The space temperatures are controlled using programmable thermostats in the respective zones.

AAON Packaged Units

Cafeteria Packaged Units

Split AC Unit

Programmable Thermostat for Split Units

2.6 Heating Hot Water Systems

Two LAARS condensing gas-fired hot water boilers serve a portion of the building heating load. The burners are fully-modulating with a nominal efficiency of 85%. The boilers are configured in a lead-lag control scheme. Installed in 2008, they are in good condition.

The boilers are configured in a constant flow primary distribution with two 5 hp constant speed hot water pumps. The boilers provide hot water to unit ventilators in classrooms throughout the building.

The classrooms also have 1 kW electric resistance heaters as backup in case convectors face any issue to provide heat. Heating set points in the buildings are between 71°F to 74°F. Gas-fired furnaces provide heat in areas conditioned by package units.

Condensing Hot Water Boiler

Heating Hot Water Pumps

Electric Heater

Unit Ventilators

2.7 Building Energy Management Systems (EMS)

A Carrier Automated Building EMS controls the HVAC equipment, boilers, air handlers, and package units. The EMS provides equipment scheduling control and monitors and controls space temperatures, supply air temperatures and heating water loop temperatures.

2.8 Domestic Hot Water

Hot water is produced using two water heaters. Both units are gas-fired with input capacities of 150 MBh. The AO Smith heater is 75% efficient with a tank capacity of 100 gallons (AO Smith) while the Laars unit, with a tank capacity of 60 gallons, is 80% efficient. The water heaters were installed in the years 2008 and 2016, respectively. The older unit (AO Smith) has been evaluated for replacement.

The hot water is distributed to end uses using fractional horse power circulation pump.

AO Smith Water Heater

Laars Water Heater

2.9 Food Service Refrigeration Equipment

The kitchen has a mix of gas and electric equipment that is used to prepare lunches for students. Most cooking/reheating is done using a convection gas-fired oven. Bulk prepared foods are held in several electric holding cabinets. Equipment are high-efficiency and in good condition.

The kitchen has a stand-up refrigerator with solid doors and several refrigerated chests. All equipment is standard efficiency and in good condition.

The walk-in refrigerator has an estimated 0.67-ton compressor and a two-fan evaporator. The walk-in medium temperature freezer has an approximately 1.67-ton compressor and a three-fan evaporator with defrost controls.

Visit https://www.energystar.gov/products/commercial_food_service_equipment for the latest information on high-efficiency food service equipment.

Convection Oven

Warmers

Freezer Chest

Reach-in Refrigerator

2.10 Plug Load & Vending Machines

The utility bill analysis indicates that plug loads consume approximately 6% percent of total building energy use. This is higher than a typical building. You may wish to consider paying particular attention to minimizing your plug load usage. This report makes suggestions for ECMs in this area, as well as Energy Efficient Best Practices.

There are approximately 133 computer work stations throughout the Elementary School. Plug loads throughout the building include general café and office equipment. There are classroom typical loads such as Smart Boards, projectors, and fans. There are several residential-style refrigerators throughout the building that are used to store food. These vary in condition and efficiency. There is one refrigerated beverage vending machine and one non-refrigerated vending machine not equipped with occupancy-based controls.

2.11 Water-Using Systems

There are 22 faucets with flow rates at 2.2 gallons per minute (gpm). Toilets are rated at 1.6 gallons per flush (gpf) and urinals are rated at 1.0 gpf

2.12 On-Site Generation

Lillian M. Dunfee Elementary School has a photovoltaic (PV) array of approximately 215 kW with 770 panels, installed in 2011. The system provides approximately 65% of the electricity used at the Elementary School.

Solar Array

Solar Array (closeup)

3 Energy Use and Costs

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Utility Summary		
Fuel	**Usage**	**Cost**
Electricity	599,336 kWh	$75,926
Natural Gas	18,560 Therms	$19,581
Total		**$95,507**

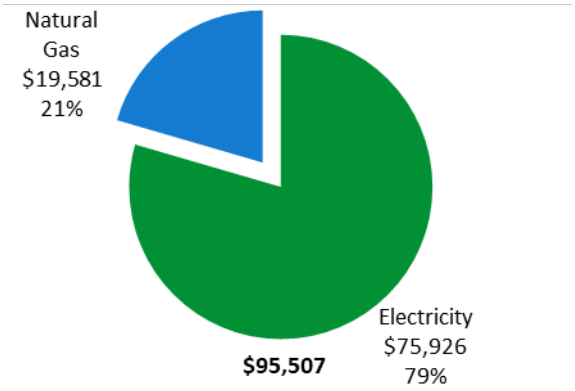

An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.

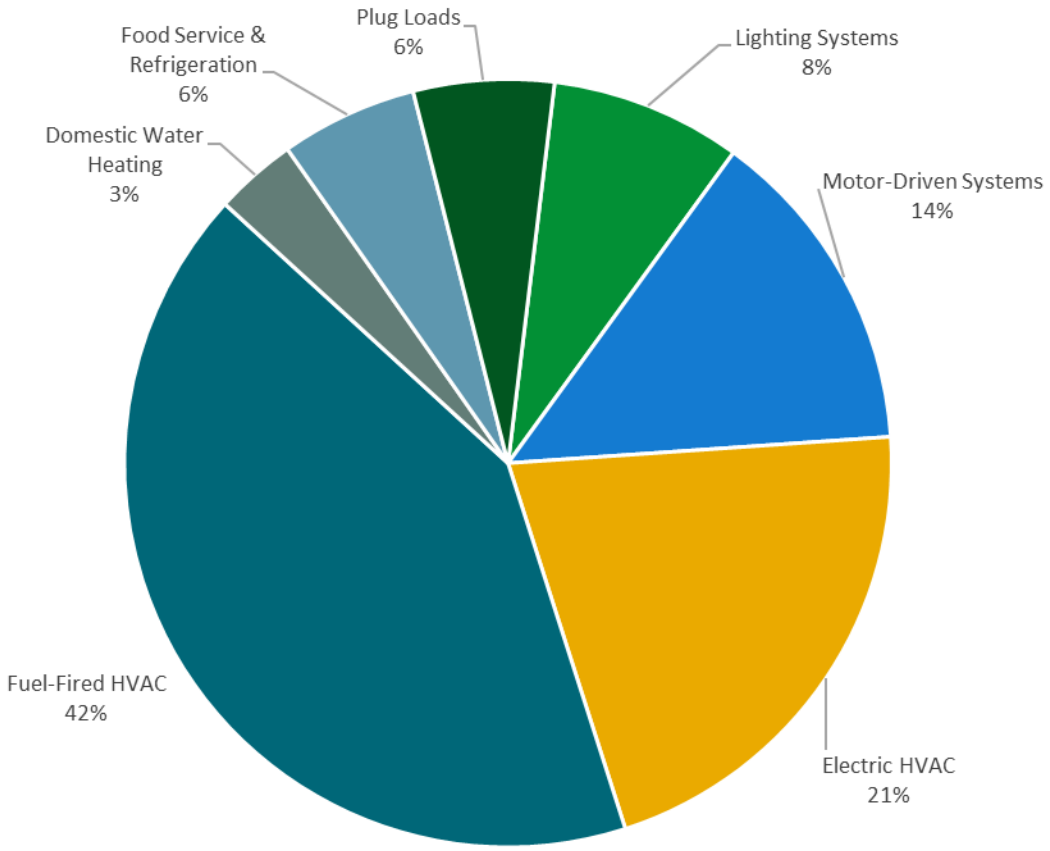

Figure 5 - Energy Balance

3.1 Electricity

JCP&L delivers electricity under rate class GSS, with electric production provided by South Jersey Energy/Trieagle Energy, a third-party supplier.

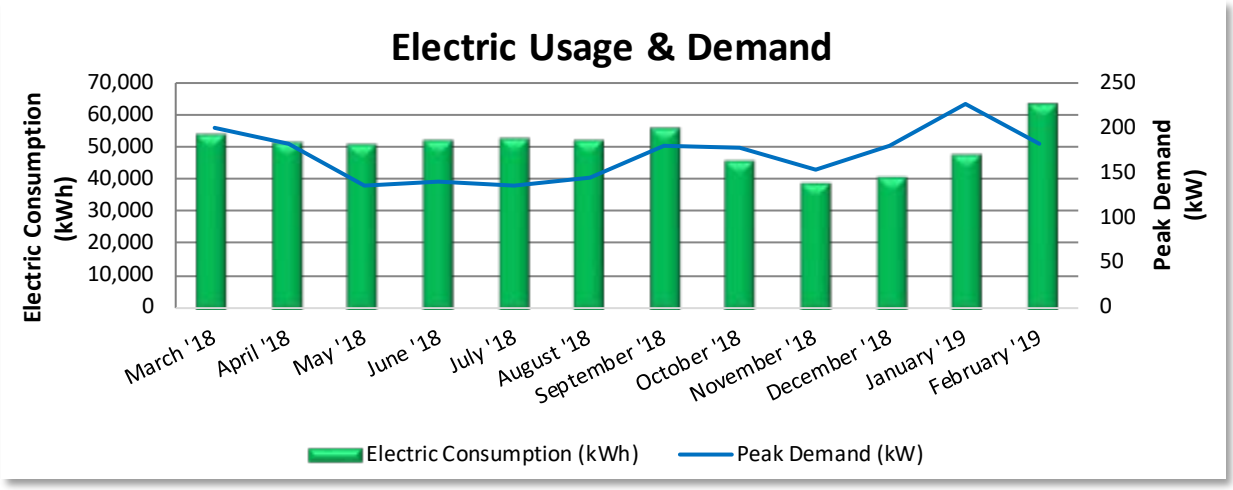

Electric Billing Data					
Period Ending	**Days in Period**	**Electric Usage (kWh)**	**Demand (kW)**	**Demand Cost**	**Total Electric Cost**
3/27/18	30	53,752	199	$1,250	$6,589
4/24/18	28	51,275	183	$1,092	$6,656
5/25/18	31	50,209	136	$791	$6,158
6/26/18	32	51,592	139	$870	$6,478
7/26/18	30	52,333	136	$851	$6,569
8/27/18	32	51,957	144	$902	$6,526
9/26/18	30	55,135	179	$1,139	$6,738
10/25/18	29	45,615	177	$1,048	$6,154
11/27/18	33	38,473	153	$897	$5,149
12/27/18	30	40,280	180	$1,068	$5,712
1/25/19	29	47,579	227	$1,359	$6,035
2/26/19	32	62,778	182	$1,080	$7,369
Totals	**366**	**600,978**	**227**	**$12,346**	**$76,134**
Annual	**365**	**599,336**	**227**	**$12,313**	**$75,926**

Notes:

- Peak demand of 227 kW occurred in January '19.
- The average electric cost over the past 12 months was $0.127/kWh, which is the blended rate that includes energy supply, distribution, demand, and other charges. This report uses this blended rate to estimate energy cost savings.

3.2 Natural Gas

New Jersey Natural Gas delivers natural gas under rate class GSL, with natural gas supply provided by South Jersey Energy, a third-party supplier.

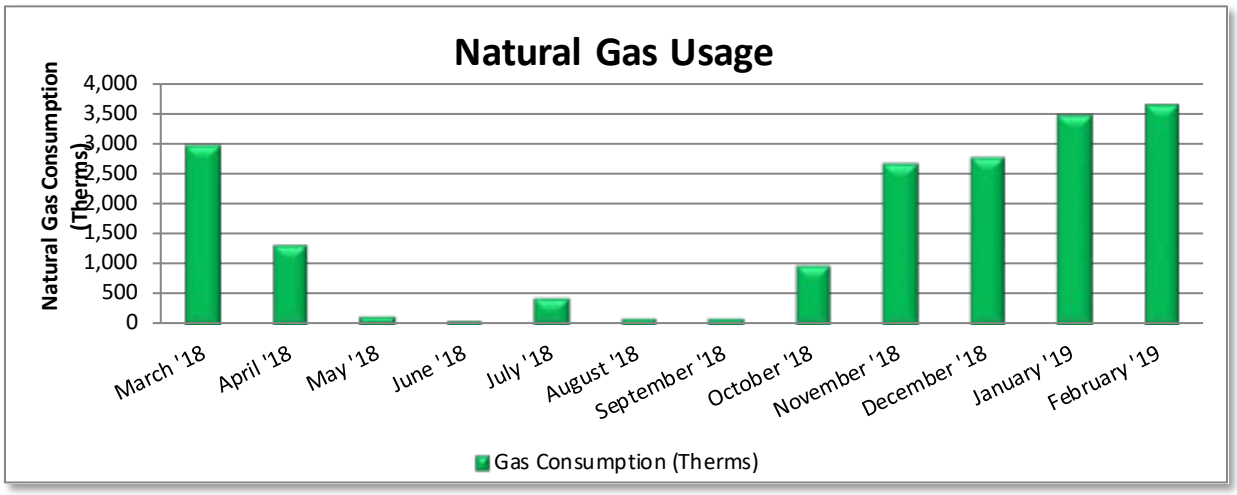

Gas Billing Data			
Period Ending	**Days in Period**	**Natural Gas Usage (Therms)**	**Natural Gas Cost**
4/4/18	30	2,945	$2,610
5/2/18	28	1,327	$1,305
6/4/18	33	141	$532
7/3/18	29	74	$329
8/3/18	31	457	$629
8/29/18	26	104	$353
10/1/18	33	128	$374
11/1/18	31	995	$1,038
12/5/18	34	2,644	$2,304
1/3/19	29	2,744	$3,183
2/2/19	30	3,435	$3,520
3/6/19	32	3,616	$3,457
Totals	**366**	**18,610**	**$19,635**
Annual	**365**	**18,560**	**$19,581**

Notes:

- The average gas cost for the past 12 months is $1.055/therm, which is the blended rate used throughout the analysis.

3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager®* software. Benchmarking compares your building's energy use to that of similar buildings across the country, while neutralizing variations due to location, occupancy and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR® benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

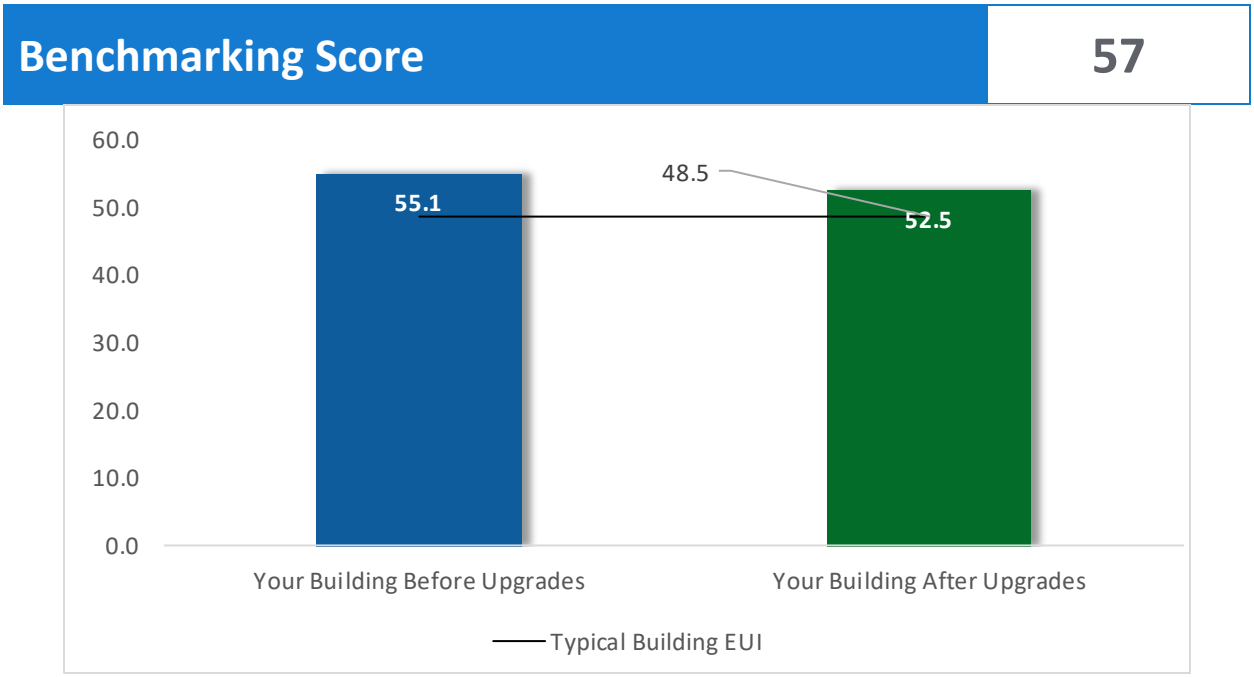

Figure 6 - Energy Use Intensity Comparison

Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance, and lower your energy bills even more.

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. A number of factors can cause as building to vary from the "typical" energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.

Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager® regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager® account for your facility and we have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR® Portfolio Manager® to track your building's performance at: https://www.energystar.gov/buildings/training.

For more information on ENERGY STAR® and Portfolio Manager®, visit their website[3].

[3] https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1.

4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements, provide information about the cost effectiveness of those improvements, and recognize potential financial incentives from NJBPU. Most energy conservation measures have received preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives are based on the current NJCEP prescriptive SmartStart program. A higher level of investigation may be necessary to support any SmartStart Custom, Pay for Performance, or Direct Install incentive applications. Some measures and proposed upgrades may be eligible for higher incentives than those shown below through other NJCEP programs described in a following section of this report.

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Lighting Upgrades		**9,100**	**1.5**	**-1**	**$1,142**	**$3,485**	**$486**	**$2,999**	**2.6**	**9,043**
ECM 1	Retrofit Fixtures with LED Lamps	9,100	1.5	-1	$1,142	$3,485	$486	$2,999	2.6	9,043
Lighting Control Measures		**19,397**	**3.9**	**-4**	**$2,415**	**$16,910**	**$1,420**	**$15,490**	**6.4**	**19,058**
ECM 2	Install Occupancy Sensor Lighting Controls	16,213	3.3	-3	$2,018	$13,310	$1,420	$11,890	5.9	15,930
ECM 3	Install High/Low Lighting Controls	3,184	0.6	-1	$396	$3,600	$0	$3,600	9.1	3,129
Variable Frequency Drive (VFD) Measures		**16,272**	**3.1**	**0**	**$2,061**	**$13,154**	**$600**	**$12,554**	**6.1**	**16,386**
ECM 4	Install VFDs on Constant Volume (CV) Fans	7,759	2.1	0	$983	$4,761	$600	$4,161	4.2	7,813
ECM 5	Install VFDs on Heating Water Pumps	8,513	1.0	0	$1,079	$8,394	$0	$8,394	7.8	8,573
Electric Unitary HVAC Measures		**22,054**	**15.1**	**0**	**$2,794**	**$350,615**	**$7,608**	**$343,007**	**122.8**	**22,208**
ECM 6	Install High Efficiency Air Conditioning Units	22,054	15.1	0	$2,794	$350,615	$7,608	$343,007	122.8	22,208
Gas Heating (HVAC/Process) Replacement		**0**	**0.0**	**146**	**$1,539**	**$53,358**	**$3,200**	**$50,158**	**32.6**	**17,082**
ECM 7	Install High Efficiency Furnaces	0	0.0	146	$1,539	$53,358	$3,200	$50,158	32.6	17,082
Domestic Water Heating Upgrade		**0**	**0.0**	**44**	**$468**	**$8,826**	**$300**	**$8,526**	**18.2**	**5,197**
ECM 8	Install High Efficiency Gas-Fired Water Heater	0	0.0	13	$138	$8,669	$300	$8,369	60.7	1,530
ECM 9	Install Low-Flow DHW Devices	0	0.0	31	$330	$158	$0	$158	0.5	3,667
Food Service & Refrigeration Measures		**1,612**	**0.2**	**0**	**$204**	**$230**	**$50**	**$180**	**0.9**	**1,623**
ECM 10	Vending Machine Control	1,612	0.2	0	$204	$230	$50	$180	0.9	1,623
TOTALS		**68,435**	**23.8**	**185**	**$10,623**	**$446,578**	**$13,664**	**$432,914**	**40.8**	**90,597**

* - All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

** - Simple Payback Period is based on net measure costs (i.e. after incentives).

Figure 7 – All Evaluated ECMs

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Lighting Upgrades		**9,100**	**1.5**	**-1**	**$1,142**	**$3,485**	**$486**	**$2,999**	**2.6**	**9,043**
ECM 1	Retrofit Fixtures with LED Lamps	9,100	1.5	-1	$1,142	$3,485	$486	$2,999	2.6	9,043
Lighting Control Measures		**19,397**	**3.9**	**-4**	**$2,415**	**$16,910**	**$1,420**	**$15,490**	**6.4**	**19,058**
ECM 2	Install Occupancy Sensor Lighting Controls	16,213	3.3	-3	$2,018	$13,310	$1,420	$11,890	5.9	15,930
ECM 3	Install High/Low Lighting Controls	3,184	0.6	-1	$396	$3,600	$0	$3,600	9.1	3,129
Variable Frequency Drive (VFD) Measures		**16,272**	**3.1**	**0**	**$2,061**	**$13,154**	**$600**	**$12,554**	**6.1**	**16,386**
ECM 4	Install VFDs on Constant Volume (CV) Fans	7,759	2.1	0	$983	$4,761	$600	$4,161	4.2	7,813
ECM 5	Install VFDs on Heating Water Pumps	8,513	1.0	0	$1,079	$8,394	$0	$8,394	7.8	8,573
Domestic Water Heating Upgrade		**0**	**0.0**	**31**	**$330**	**$158**	**$0**	**$158**	**0.5**	**3,667**
ECM 9	Install Low-Flow DHW Devices	0	0.0	31	$330	$158	$0	$158	0.5	3,667
Food Service & Refrigeration Measures		**1,612**	**0.2**	**0**	**$204**	**$230**	**$50**	**$180**	**0.9**	**1,623**
ECM 10	Vending Machine Control	1,612	0.2	0	$204	$230	$50	$180	0.9	1,623
TOTALS		**46,381**	**8.7**	**26**	**$6,152**	**$33,937**	**$2,556**	**$31,381**	**5.1**	**49,777**

* - All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

** - Simple Payback Period is based on net measure costs (i.e. after incentives).

Figure 8 – Cost Effective ECMs

4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Lighting Upgrades		**9,100**	**1.5**	**-1**	**$1,142**	**$3,485**	**$486**	**$2,999**	**2.6**	**9,043**
ECM 1	Retrofit Fixtures with LED Lamps	9,100	1.5	-1	$1,142	$3,485	$486	$2,999	2.6	9,043

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources is proposed, we suggest converting all fixtures of a specific lighting type (e.g. linear fluorescent) to LED lamps to minimize the number of lamp types in use at the Elementary School, which should help reduce future maintenance costs.

ECM 1: Retrofit Fixtures with LED Lamps

Replace fluorescent or CFL lamps with LED lamps. Many LED tubes are direct replacements for existing fluorescent tubes and can be installed while leaving the fluorescent fixture ballast in place. LED lamps can be used in existing fixtures as direct replacements for most other lighting technologies.

This measure saves energy by installing LEDs, which use less power than other lighting technologies while providing equivalent lighting output for the space. Maintenance savings may also be available, as longer-lasting LEDs lamps will not need to be replaced as often as the existing lamps.

Affected building areas: gym with T5 fixtures and smaller spaces with CFL.

4.2 Lighting Controls

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Lighting Control Measures		**19,397**	**3.9**	**-4**	**$2,415**	**$16,910**	**$1,420**	**$15,490**	**6.4**	**19,058**
ECM 2	Install Occupancy Sensor Lighting Controls	16,213	3.3	-3	$2,018	$13,310	$1,420	$11,890	5.9	15,930
ECM 3	Install High/Low Lighting Controls	3,184	0.6	-1	$396	$3,600	$0	$3,600	9.1	3,129

Lighting controls reduce energy use by turning off or lowering lighting fixture power levels when not in use. A comprehensive approach to lighting design should upgrade the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.

ECM 2: Install Occupancy Sensor Lighting Controls

Install occupancy sensors to control lighting fixtures in areas that are frequently unoccupied, even for short periods. For most spaces, we recommend that lighting controls use dual technology sensors, which reduce the possibility of lights turning off unexpectedly.

Occupancy sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Most occupancy sensor lighting controls allow users to manually turn fixtures on/off, as needed. Some controls can also provide dimming options.

Occupancy sensors can be mounted on the wall at existing switch locations, on the ceiling, or in remote locations. In general, wall switch replacement sensors are best suited to single occupant offices and other small rooms. Ceiling-mounted or remote-mounted sensors are used in large spaces, locations without local switching, and where wall switches are not in the line-of-sight of the main work area.

This measure provides energy savings by reducing the lighting operating hours.

Affected building areas: offices, conference rooms, classrooms, gymnasium, library, restrooms, and storage rooms.

ECM 3: Install High/Low Lighting Controls

Install occupancy sensors to provide dual level lighting control for lighting fixtures in spaces that are infrequently occupied but may require some level of continuous lighting for safety or security reasons.

Lighting fixtures with these controls operate at default low levels when the area is unoccupied to provide minimal lighting to meet security or safety requirements. Sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Fixtures automatically switch back to low levels after a predefined period of vacancy. In parking lots and parking garages with significant ambient lighting, this control can sometimes be combined with photocell controls to turn the lights off when there is sufficient daylight.

The control lowers the light level by dimming the fixture output. Therefore, the controlled fixtures need to have a dimmable ballast or driver. This will need to be taken into account when selecting retrofit lamps and bulbs for the areas proposed for high/low control.

This measure provides energy savings by reducing the light fixture power draw when reduced light output is appropriate.

Affected building areas: hallways

4.3 Variable Frequency Drives (VFD)

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Variable Frequency Drive (VFD) Measures		**16,272**	**3.1**	**0**	**$2,061**	**$13,154**	**$600**	**$12,554**	**6.1**	**16,386**
ECM 4	Install VFDs on Constant Volume (CV) Fans	7,759	2.1	0	$983	$4,761	$600	$4,161	4.2	7,813
ECM 5	Install VFDs on Heating Water Pumps	8,513	1.0	0	$1,079	$8,394	$0	$8,394	7.8	8,573

Variable frequency drives (VFDs) control motors for fans, pumps, and process equipment based on the actual output required of the driven equipment. Energy savings result from more efficient control of motor energy usage when equipment operates at partial load. The magnitude of energy savings depends on the estimated amount of time that the motor would operate at partial load. For equipment with proposed VFDs, we have included replacing the controlled motor with a new motor to conservatively account for the cost of an inverter duty rated motor.

ECM 4: Install VFDs on Constant Volume (CV) Fans

Install VFDs to control constant volume fan motor speeds. This converts a constant-volume, single-zone air handling system into a variable-air-volume (VAV) system. A separate VFD is usually required to control the return fan motor or dedicated exhaust fan motor, if the air handler has one.

Zone thermostats signal the VFD to adjust fan speed to maintain the appropriate temperature in the zone while maintaining a constant supply air temperature.

For air handlers with direct expansion (DX) cooling systems, the minimum air flow across the cooling coil required to prevent the coil from freezing must be determined during the final project design. The control system programming should maintain the minimum air flow whenever the compressor is operating. Prior to implementation, verify minimum fan speed in cooling mode with the manufacturer. Note that savings will vary depending on the operating characteristics of each AHU.

Energy savings result from reducing the fan speed (and power) when conditions allow for reduced air flow.

Affected air handlers: AHU.

ECM 5: Install VFDs on Heating Water Pumps

Install VFDs to control heating water pumps. Two-way valves must serve the hot water coils, and the hot water loop must have a differential pressure sensor installed. If three-way valves or a bypass leg are used in the hot water distribution, they will need to be modified when this measure is implemented. As the hot water valves close, the differential pressure increases, and the VFD modulates the pump speed to maintain a differential pressure setpoint.

Energy savings result from reducing pump motor speed (and power) as hot water valves close. The magnitude of energy savings is based on the estimated amount of time that the system will operate at reduced load.

Affected pumps: HWP 1, HWP 2.

4.4 Electric Unitary HVAC

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Electric Unitary HVAC Measures		**22,054**	**15.1**	**0**	**$2,794**	**$350,615**	**$7,608**	**$343,007**	**122.8**	**22,208**
ECM 6	Install High Efficiency Air Conditioning Units	22,054	15.1	0	$2,794	$350,615	$7,608	$343,007	122.8	22,208

Replacing the unitary HVAC units has a long payback period and may not be justifiable based simply on energy considerations. However, most of the units at the Elementary School are nearing or have reached the end of their normal useful life. Typically, the marginal cost of purchasing a high-efficiency unit can be justified by the marginal savings from the improved efficiency. When the packaged and the split AC units is eventually replaced, consider purchasing equipment that exceeds the minimum efficiency required by building codes.

ECM 6: Install High-Efficiency Air Conditioning Units

Replace standard efficiency packaged air conditioning units with high-efficiency packaged air conditioning units. The magnitude of energy savings for this measure depends on the relative efficiency of the older unit versus the new high-efficiency unit, average cooling load, and estimated annual operating hours.

Affected cooling units: part of RTU replacement for RTU 1, 2, 3, 4, 5, 6, 8, 9; older split system units.

4.5 Gas-Fired Heating

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Gas Heating (HVAC/Process) Replacement		**0**	**0.0**	**146**	**$1,539**	**$53,358**	**$3,200**	**$50,158**	**32.6**	**17,082**
ECM 7	Install High Efficiency Furnaces	0	0.0	146	$1,539	$53,358	$3,200	$50,158	32.6	17,082

ECM 7: Install High-Efficiency Furnaces

Replace standard efficiency furnaces with condensing furnaces. Improved combustion technology and heat exchanger design optimize heat recovery from the combustion gases, which can significantly improve furnace efficiency. Savings result from improved system efficiency.

Note: these units produce acidic condensate that requires proper drainage.

Furnace replacement for these RTU should be considered in parallel with ECM 6 for replacement of the entire package unit.

Affected furnaces: part of RTU replacement for RTU 1, 2, 3, 4, 5, 6, 8, 9.

4.6 Domestic Water Heating

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Domestic Water Heating Upgrade		**0**	**0.0**	**44**	**$468**	**$8,826**	**$300**	**$8,526**	**18.2**	**5,197**
ECM 8	Install High Efficiency Gas-Fired Water Heater	0	0.0	13	$138	$8,669	$300	$8,369	60.7	1,530
ECM 9	Install Low-Flow DHW Devices	0	0.0	31	$330	$158	$0	$158	0.5	3,667

ECM 8: Install High-Efficiency Gas-Fired Water Heater

Replace the existing tank water heater with a high-efficiency tank water heater. Energy savings result from the increased efficiency of the unit, which uses less gas to heat water, and fewer operating hours to maintain the tank water temperature.

ECM 9: Install Low-Flow DHW Devices

Install low-flow devices to reduce overall hot water demand. The following low-flow devices are recommended to reduce hot water usage:

Device	Flow Rate
Faucet aerators (lavatory)	0.5 gpm
Faucet aerator (kitchen)	1.5 gpm
Showerhead	2.0 gpm
Pre-rinse spray valve (kitchen)	1.28 gpm

Low-flow devices reduce the overall water flow from the fixture while still providing adequate pressure for washing. Pre-rinse spray valves (PRSVs)—often used in commercial and institutional kitchens—remove food waste from dishes prior to dishwashing.

Additional cost savings may result from reduced water usage.

4.7 Food Service & Refrigeration Measures

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Food Service & Refrigeration Measures		**1,612**	**0.2**	**0**	**$204**	**$230**	**$50**	**$180**	**0.9**	**1,623**
ECM 10	Vending Machine Control	1,612	0.2	0	$204	$230	$50	$180	0.9	1,623

ECM 10: Vending Machine Control

Vending machines operate continuously, even during unoccupied hours. Install occupancy sensor controls to reduce energy use. These controls power down vending machines when the vending machine area has been vacant for some time, and power up the machines at necessary regular intervals or when the surrounding area is occupied. Energy savings are dependent on the vending machine and activity level in the area surrounding the machines.

5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs. You may already be doing some of these things— see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR® Portfolio Manager®

You've heard it before - you can't manage what you don't measure. ENERGY STAR® Portfolio Manager® is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions[4]. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

Lighting Controls

As part of a lighting maintenance schedule, test lighting controls to ensure proper functioning. For occupancy sensors, this requires triggering the sensor and verifying that the sensor's timer settings are correct. For daylight and photocell sensors, maintenance involves cleaning sensor lenses and confirming that setpoints and sensitivity are configured properly.

Thermostat Schedules and Temperature Resets

Use thermostat setback temperatures and schedules to reduce heating and cooling energy use during periods of low or no occupancy. Thermostats should be programmed for a setback of 5-10°F during low occupancy hours (reduce heating setpoints and increase cooling setpoints). Cooling load can be reduced by increasing the facility's occupied setpoint temperature. In general, during the cooling season, thermostats should be set as high as possible without sacrificing occupant comfort.

AC System Evaporator/Condenser Coil Cleaning

Dirty evaporator and condenser coils restrict air flow and restrict heat transfer. This increases the loads on the evaporator and condenser fan, and decreases overall cooling system performance. Keeping the coils clean allows the fans and cooling system to operate more efficiently.

HVAC Filter Cleaning and Replacement

Air filters should be checked regularly (often monthly) and cleaned or replaced when appropriate. Air filters reduce indoor air pollution, increase occupant comfort, and help keep equipment operating efficiently. If the building has a building management system, consider installing a differential pressure switch across filters to send an alarm about premature fouling or overdue filter replacement. Over time, filters become less and less effective as particulate buildup increases. Dirty filters also restrict air flow through the air conditioning or heat pump system, which increases the load on the distribution fans.

[4] https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager.

Boiler Maintenance

Many boiler problems develop slowly over time, so regular inspection and maintenance is essential to keeping the heating system running efficiently and preventing expensive repairs. Annual tune-ups should include a combustion analysis to analyze the exhaust from the boilers and to ensure the boiler is operating safely. Boilers should be cleaned according to the manufacturer's instructions to remove soot and scale from the water side or fire side of the boiler.

Furnace Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. Following the manufacturer's instructions, a yearly tune-up should: check for gas / carbon monoxide leaks; change the air and fuel filters; check components for cracks, corrosion, dirt, or debris build-up; ensure the ignition system is working properly; test and adjust operation and safety controls; inspect electrical connections; and lubricate motors and bearings.

Water Heater Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.
- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.

Plug Load Controls



Reducing plug loads is a common way to decrease your electrical use. Limiting the energy use of plug loads can include increasing occupant awareness, removing under-used equipment, installing hardware controls, and using software controls. Consider enabling the most aggressive power settings on existing devices or install load sensing or occupancy sensing (advanced) power strips[5]. Your local utility may offer incentives or rebates for this equipment.

[5] For additional information refer to "Assessing and Reducing Plug and Process Loads in Office Buildings" http://www.nrel.gov/docs/fy13osti/54175.pdf, or "Plug Load Best Practices Guide" http://www.advancedbuildings.net/plug-load-best-practices-guide-offices.

Computer Monitor Replacement

ENERGY STAR® labeled computer monitors can be up to 25% more efficient than standard monitors. ENERGY STAR® rated monitors have power consumption requirements for different operating modes such as on, idle, and sleep.

Water Conservation

Installing dual flush or low-flow toilets and low-flow/waterless urinals are ways to reduce water use. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and for flush valve toilets is 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

For more information regarding water conservation go to the EPA's WaterSense™ website[6] or download a copy of EPA's "WaterSense™ at Work: Best Management Practices for Commercial and Institutional Facilities"[7] to get ideas for creating a water management plan and best practices for a wide range of water using systems.

Water conservation devices that do not reduce hot water consumption will not provide energy savings at the site level, but they may significantly affect your water and sewer usage costs. Any reduction in water use does however ultimately reduce grid-level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users.

If the facility has detached buildings with a master water meter for the entire campus, check for unnatural wet areas in the lawn or water seeping in the foundation at water pipe penetrations through the foundation. Periodically check overnight meter readings when the Elementary School is unoccupied, and there is no other scheduled water usage.

Manage irrigation systems to use water more effectively outside the building. Adjust spray patterns so that water lands on intended lawns and plantings and not on pavement and walls. Consider installing an evapotranspiration irrigation controller that will prevent over-watering.

Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR® or WaterSense™ products where available.

[6] https://www.epa.gov/watersense

[7] https://www.epa.gov/watersense/watersense-work-0

6 On-site Generation

You don’t have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the Elementary School’s electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a cost-effective solution for the Elementary School. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.

6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has a **high** potential for expanding the PV array.

The amount of free area, ease of installation (roof), and the lack of shading elements contribute to the high potential. A PV array located on the roof may be feasible. If you are interested in pursuing the installation of PV, we recommend conducting a full feasibility study.

The graphic below displays the results of the PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

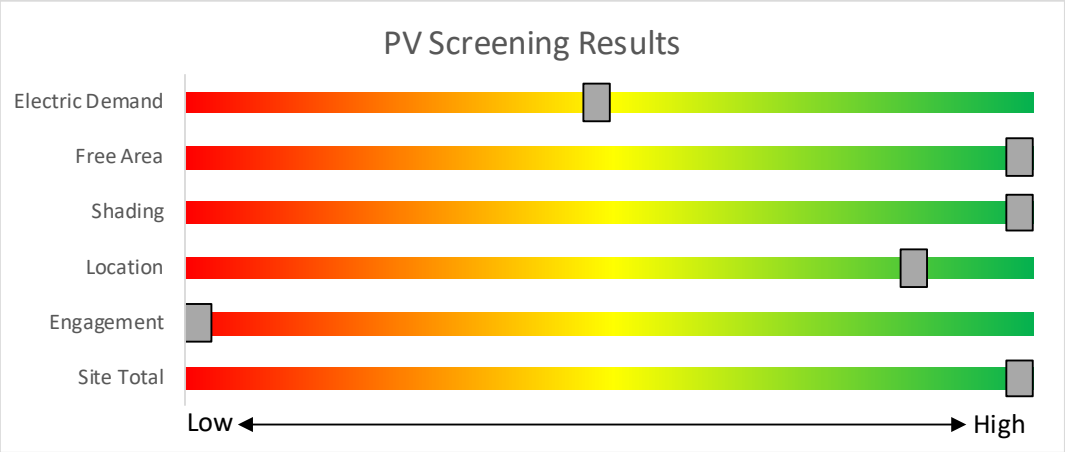

Potential	High	
System Potential	121	kW DC STC
Electric Generation	144,156	kWh/yr
Displaced Cost	$18,260	/yr
Installed Cost	$346,100	

Figure 9 - Photovoltaic Screening

Solar Renewable Energy Certificate (SREC) Registration Program (SRP)

Rebates are not available for solar projects, but owners of solar projects MUST register their projects in the SREC Registration Program before starting construction. Once your PV system is up and running, you periodically earn credits, which can then be sold on the open market for up to 15 years.

If you are considering installing solar photovoltaics on your building, visit www.njcleanenergy.com/srec for more information about the SREC Registration Program.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

- **Basic Info on Solar PV in New Jersey**: www.njcleanenergy.com/whysolar
- **New Jersey Solar Market FAQs**: www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs
- **Approved Solar Installers in the New Jersey Market**: www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1

6.2 Combined Heat and Power

Combined heat and power (CHP) generate electricity at the Elementary School and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.

CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has **no** potential for installing a cost-effective CHP system.

Based on a preliminary analysis, the facility does not appear to meet the minimum requirements for a cost-effective CHP installation. The lack of gas service, low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

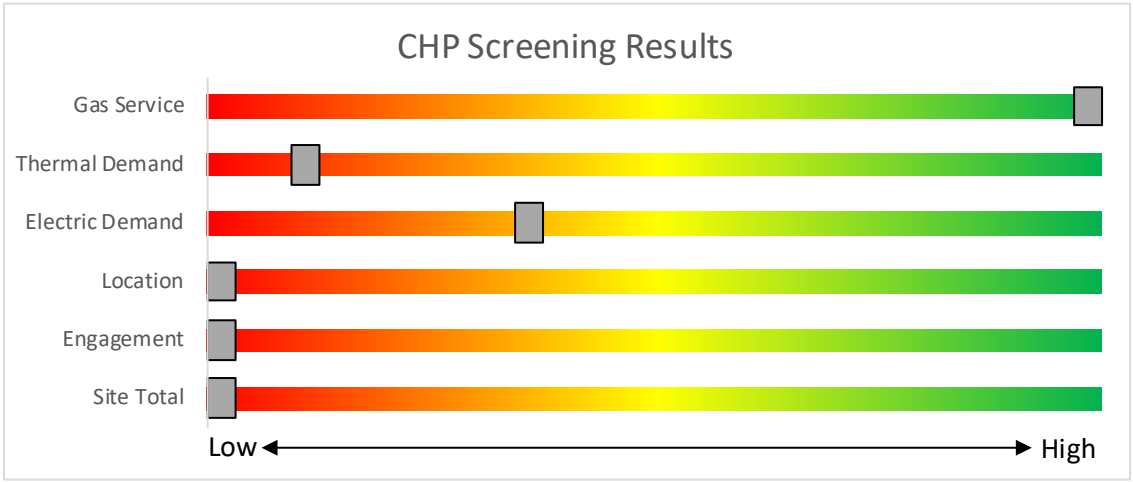

Potential	None	
System Type	None	
System Potential	10	kW
Electric Generation	17,168	kWh/yr
Thermal Generation	364,391	MBtu/yr
Displaced Cost	$496	/yr
Installed Cost	$30,000	

Figure 10 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/.

7 PROJECT FUNDING AND INCENTIVES

Ready to improve your building's performance? Pick the program that works best for you. Incentive programs that may apply to the Elementary School are identified in the Executive Summary. This section provides an overview of currently available New Jersey's Clean Energy Programs.

	SmartStart *Flexibility to install at your own pace*	**Direct Install** *Turnkey installation*	**Pay for Performance** *Whole building upgrades*
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together. Average peak demand should be below 200 kW. Not suitable for significant building shell issues.	Mid to large size facilities looking to implement as many measures as possible at one time. Peak demand should be over 200 kW.
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to $125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.
Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.			

7.1 SmartStart

SmartStart offers incentives for installing prescriptive and custom energy efficiency measures at your facility. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

SmartStart routinely adds, removes, or modifies incentives from year-to-year for various energy efficient equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting
Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Incentives

The SmartStart Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type.

SmartStart Custom provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives. Custom incentives are calculated at $0.16/kWh and $1.60/therm based on estimated annual savings. Incentives are capped at 50% of the total installed incremental project cost, or a project cost buy down to a one-year payback (whichever is less). Program incentives are capped at $500,000 per electric account and $500,000 per natural gas account, per fiscal year.

How to Participate

Submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. You can work with your preferred contractor or use internal staff to install measures.

Visit www.njcleanenergy.com/SSB for a detailed program description, instructions for applying, and applications.

7.2 Direct Install

Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW over the recent 12-month period. You work directly with a pre-approved contractor who will perform a free energy assessment at the Elementary School, identify specific eligible measures, and provide a clear scope of work for installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives, and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures, up to $125,000 per project. Each entity is limited to incentives up to $250,000 per fiscal year.

How to Participate

To participate in Direct Install, you will need to contact the participating contractor assigned to the region of the state where the Elementary School is located. A complete list of Direct Install program partners is provided on the Direct Install website linked below. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI.

7.3 Pay for Performance - Existing Buildings

Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures that results in at least 15% source energy savings, and lighting cannot make up the majority of the savings. P4P is a generally a good option for medium-to-large sized facilities looking to implement as many measures as possible under a single project to achieve deep energy savings. This program has an added benefit of addressing measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program loan also use this program.

The scope of work presented in this audit report does not quite meet the requirements of the current P4P program. However, due to the size of the facility and existing conditions, should additional measures be identified at a later point in time, for example through further evaluation or the Energy Savings Improvement Program process, this facility could potentially meet the requirements necessary to participate in the P4P program.

Incentives

Incentives are based on estimated and achieved energy savings ranging from $0.18-$0.22/kWh and $1.80-$2.50/therm, capped at the lesser of 50% total project cost, or $1 million per electric account and $1 million per natural gas account, per fiscal year, not to exceed $2 million per project. An incentive of $0.15/square foot is also available to offset the cost of developing the Energy Reduction Plan (see below) contingent on the project moving forward with measure installation.

How to Participate

Contact one of the pre-approved consultants and contractors (“Partners”). Under direct contract to you, they will help further evaluate the measures identified in this report through development of the energy reduction plan, assist you in implementing selected measures, and verify actual savings one year after the installation. Your Partner will also help you apply for incentives.

Approval of the final scope of work is required by the program prior to installation. Installation can be done by the contractor of your choice (some P4P Partners are also contractors) or by internal staff, but the Partner remains involved throughout construction to ensure compliance with the program requirements.

Detailed program descriptions, instructions for applying, applications and list of Partners can be found at: www.njcleanenergy.com/P4P.

7.4 Combined Heat and Power

The Combined Heat & Power (CHP) program provides incentives for eligible CHP or waste heat to power (WHP) projects. Eligible CHP or WHP projects must achieve an annual system efficiency of at least 65% (lower heating value, or LHV), based on total energy input and total utilized energy output. Mechanical energy may be included in the efficiency evaluation.

Incentives

Eligible Technologies	Size (Installed Rated Capacity)[1]	Incentive ($/kW)	% of Total Cost Cap per Project[3]	$ Cap per Project[3]
Powered by non-renewable or renewable fuel source[4]	≤500 kW	$2,000	30-40%[2]	$2 million
Gas Internal Combustion Engine	>500 kW - 1 MW	$1,000		
Gas Combustion Turbine	> 1 MW - 3 MW	$550	30%	$3 million
Microturbine Fuel Cells with Heat Recovery	>3 MW	$350		
Waste Heat to Power*	<1 MW	$1,000	30%	$2 million
	> 1MW	$500		$3 million

*Waste Heat to Power: Powered by non-renewable fuel source, heat recovery or other mechanical recovery from existing equipment utilizing new electric generation equipment (e.g. steam turbine).

Check the NJCEP website for details on program availability, current incentive levels, and requirements.

How to Participate

You work with a qualified developer or consulting firm to complete the CHP application. Once the application is approved the project can be installed. Information about the CHP program can be found at: www.njcleanenergy.com/CHP.

7.5 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

(1) Use an energy services company or "ESCO."

(2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.

(3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.

7.6 SREC Registration Program

The SREC (Solar Renewable Energy Certificate) Registration Program (SRP) is used to register the intent to install solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SRECs. Registration of the intent to participate in New Jersey's solar marketplace provides market participants with information about the pipeline of anticipated new solar capacity and insight into future SREC pricing.

After the registration is accepted, construction is complete, and final paperwork has been submitted and is deemed complete, the project is issued a New Jersey certification number, which enables it to generate New Jersey SRECs. SREC's are generated once the solar project has been authorized to be energized by the Electric Distribution Company (EDC).

Each time a solar installation generates 1,000 kilowatt-hours (kWh) of electricity, an SREC is earned. Solar project owners report the energy production to the SREC Tracking System. This reporting allows SREC's to be placed in the customer's electronic account. SRECs can then be sold on the SREC Tracking System, providing revenue for the first 15 years of the project's life.

Electricity suppliers, the primary purchasers of SRECs, are required to pay a Solar Alternative Compliance Payment (SACP) if they do not meet the requirements of New Jersey's Solar Renewable Portfolio Standard. Purchasing SRECs can help them meet those requirements. As SRECs are traded in a competitive market, the price may vary significantly. The actual price of an SREC during a trading period fluctuates depending on supply and demand.

Information about the SRP can be found at: www.njcleanenergy.com/srec.

8 Energy Purchasing and Procurement Strategies

8.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for the Elementary School's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website[8].

8.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate monthly. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website[9].

[8] www.state.nj.us/bpu/commercial/shopping.html

[9] www.state.nj.us/bpu/commercial/shopping.html

APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

	Existing Conditions						Proposed Conditions								Energy Impact & Financial Analysis						
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Mechanical room	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Electrical room	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
DHW room	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
MPR	24	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	24	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.2	763	0	$95	$540	$70	4.9
MPR	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.0	110	0	$14	$69	$4	4.7
MPR stage	10	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	10	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	318	0	$40	$270	$35	5.9
MPR	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
MPR storage	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	191	0	$24	$116	$0	4.9
Kitchen	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Kitchen	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
Kitchen storage	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Kitchen office	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Kitchen restroom	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Kitchen restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	$0	$0	$0	0.0
Vestibules	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Vestibules	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
100 KG	15	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	477	0	$59	$270	$35	4.0
100 KG	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
100 KG restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	$0	$0	$0	0.0
101 KG	15	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	477	0	$59	$270	$35	4.0
101 KG	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
101 KG restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	$0	$0	$0	0.0
102 KG	15	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	477	0	$59	$270	$35	4.0
102 KG	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
102 KG restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	$0	$0	$0	0.0

	Existing Conditions						Proposed Conditions								Energy Impact & Financial Analysis						
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
100 KG hallway	2	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,216	3	None	Yes	2	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	2,219	0.0	127	0	$16	$225	$0	14.2
100 KG hallway	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
103 KG	10	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	10	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	318	0	$40	$270	$35	5.9
103 KG	3	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1, 2	Relamp	Yes	3	LED Lamps: 4 pin - 2 lamps	Occupancy Sensor	36	2,219	0.1	285	0	$36	$103	$6	2.7
103 KG	5	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216	2	None	Yes	5	LED Lamps: Screw-in 1 lamp	Occupancy Sensor	10	2,219	0.0	55	0	$7	$270	$35	34.4
103 KG restroom	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Kitchen storage	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Dragon drive hall	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.0	95	0	$12	$225	$0	18.9
Main lobby	6	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	6	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.1	331	0	$41	$207	$12	4.7
Main entrance	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.0	110	0	$14	$69	$4	4.7
Main entrance	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
Teachers' lounge	8	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	8	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.1	382	0	$48	$270	$35	4.9
Teachers' lounge restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	$0	$0	$0	0.0
Teachers' lounge hallway	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.0	95	0	$12	$225	$0	18.9
Boys 1st floor	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	64	0	$8	$270	$0	34.1
Custodian closet	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Girls 1st floor	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	64	0	$8	$270	$0	34.1
Room 104	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 105	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 106	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 107	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 108	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 109	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Pod hall	18	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	18	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.1	572	0	$71	$675	$0	9.5
Pod hall	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0

	Existing Conditions						Proposed Conditions								Energy Impact & Financial Analysis						
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Vestibule 15	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Vestibule 15	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
Room 110	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 111	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 112	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 113	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 114	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 115	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
110 Pod hall	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.0	223	0	$28	$225	$0	8.1
110 Pod hall	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
Girls 1st floor	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	64	0	$8	$270	$0	34.1
Boys 1st floor	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	64	0	$8	$270	$0	34.1
Custodian closet	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
125 Electric room	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
116 SGI	6	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	6	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.1	286	0	$36	$270	$35	6.6
14 Vestibule	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
117 SGI	5	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	5	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	239	0	$30	$270	$35	7.9
Faculty restroom - Men	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	$0	$0	$0	0.0
Faculty restroom - Women	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	$0	$0	$0	0.0
Hall by Vestibule 14	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	6	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.0	191	0	$24	$225	$0	9.5
Hall by Vestibule 14	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
Room 118	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 119	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 120	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
Room 121	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6

	Existing Conditions						Proposed Conditions								Energy Impact & Financial Analysis						
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Room 122	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	286	0	$36	$270	$35	6.6
120 Pod hall	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.1	286	0	$36	$225	$0	6.3
120 Pod hall	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
123 SGI	6	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216		None	No	6	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,216	0.0	0	0	$0	$0	$0	0.0
Media center	31	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	31	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.2	986	0	$123	$540	$70	3.8
Media center	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
MC Office	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	95	0	$12	$116	$20	8.1
MC storage	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	95	0	$12	$116	$0	9.8
Boys restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	64	0	$8	$270	$0	34.1
Custodian lounge	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	$0	$0	$0	0.0
Girls restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	64	0	$8	$270	$0	34.1
Room 123A	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	95	0	$12	$116	$20	8.1
Hall by MPR	14	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	14	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.1	445	0	$55	$450	$0	8.1
Hall by MPR	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
Tech room	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	95	0	$12	$116	$20	8.1
Principal office	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	95	0	$12	$116	$20	8.1
Conference room	4	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	4	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	191	0	$24	$116	$20	4.0
Guidance office	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	95	0	$12	$116	$20	8.1
Main office	3	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,216	2	None	Yes	3	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	2,219	0.0	191	0	$24	$116	$20	4.0
Main office kitchen	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	95	0	$12	$116	$20	8.1
Main office restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	$0	$0	$0	0.0
Main office	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.0	110	0	$14	$69	$4	4.7
Main office	7	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1, 2	Relamp	Yes	7	LED Lamps: 4 pin - 2 lamps	Occupancy Sensor	36	2,219	0.1	666	0	$83	$511	$49	5.6
New addition - 126 Nurse	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	S	44	2,219		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	0	0	$0	$0	$0	0.0
New addition - 126 Nurse	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0

	Existing Conditions						Proposed Conditions								Energy Impact & Financial Analysis						
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
126 restroom	1	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
126 office	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	S	44	2,219		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	0	0	$0	$0	$0	0.0
124 computer lab	11	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	S	44	2,219		None	No	11	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	0	0	$0	$0	$0	0.0
124 copy room	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
117 Electrical room	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
118 server room	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
125 Music room	16	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	16	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
127 SGI	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
128 Practice	3	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	S	44	2,219		None	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	0	0	$0	$0	$0	0.0
115 Music office	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	S	44	2,219		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,219	0.0	0	0	$0	$0	$0	0.0
130 Music room	10	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	10	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
130 Music room	3	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216		None	No	3	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,216	0.0	0	0	$0	$0	$0	0.0
129 SGI	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
5th grade hall	12	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	12	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.1	382	0	$48	$450	$0	9.5
5th grade hall	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
5th grade hall	9	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1, 3	Relamp	Yes	9	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	2,219	0.2	856	0	$107	$535	$18	4.9
Vestibule 9	1	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	1	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.0	55	0	$7	$34	$2	4.7
Room 131	12	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.1	382	0	$48	$270	$35	4.9
Room 132	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
133 CR	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
134 art room	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	S	29	2,219		None	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	0	0	$0	$0	$0	0.0
Hall by gym	4	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,216	3	None	Yes	4	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	2,219	0.1	254	0	$32	$225	$0	7.1
Hall by gym	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
Hall by gym	7	LED Lamps: Screw-in 2 lamps	Wall Switch	S	20	3,216	3	None	Yes	7	LED Lamps: Screw-in 2 lamps	High/Low Control	20	2,219	0.0	154	0	$19	$225	$0	11.8
Gym	24	Linear Fluorescent - T5HO: 4' T5HO (54W) - 3L	Wall Switch	S	179	3,216	1, 2	Relamp	Yes	24	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	143	2,219	1.4	6,808	-1	$848	$2,395	$500	2.2

	Existing Conditions						Proposed Conditions								Energy Impact & Financial Analysis						
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Gym	7	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	7	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	$0	$0	$0	0.0
Boys restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	64	0	$8	$270	$0	34.1
Boys restroom	1	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1, 2	Relamp	Yes	1	LED Lamps: 4 pin - 2 lamps	Occupancy Sensor	36	2,219	0.0	95	0	$12	$34	$2	2.7
Girls restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	64	0	$8	$270	$0	34.1
Girls restroom	1	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1, 2	Relamp	Yes	1	LED Lamps: 4 pin - 2 lamps	Occupancy Sensor	36	2,219	0.0	95	0	$12	$34	$2	2.7
Wall pack	7	Compact Fluorescent: Wall mount - 4 pin - 2 lamps	Timeclock		64	4,380	1	Relamp	No	7	LED Lamps: Wall mount - 4 pin - 2 lamps	Timeclock	45	4,380	0.1	589	0	$75	$241	$14	3.0
Wall pack	12	Compact Fluorescent: Wall mount - 4 pin - 1 lamp	Timeclock		75	4,380	1	Relamp	No	12	LED Lamps: Wall mount - 4 pin - 1 lamp	Timeclock	53	4,380	0.1	1,183	0	$150	$207	$12	1.3
Canopy	6	Compact Fluorescent: Outside door - 4 pin - 1 lamp	Timeclock		32	4,380	1	Relamp	No	6	LED Lamps: Outside door - 4 pin - 1 lamp	Timeclock	22	4,380	0.0	252	0	$32	$103	$6	3.0
Area light	1	Compact Fluorescent: Wall mount - 4 pin - 1 lamp	Timeclock		75	4,380	1	Relamp	No	1	LED Lamps: Wall mount - 4 pin - 1 lamp	Timeclock	53	4,380	0.0	99	0	$12	$17	$1	1.3
Canopy	2	Compact Fluorescent: Screw-in - Door outside - round lamp	Timeclock		52	4,380	1	Relamp	No	2	LED Lamps: Screw-in - Door outside - round lamp	Timeclock	36	4,380	0.0	137	0	$17	$69	$4	3.7
Parking lot	10	Compact Fluorescent: Pole mount - Long circular	Timeclock		64	4,380	1	Relamp	No	10	LED Lamps: Pole mount - Long circular	Timeclock	45	4,380	0.1	841	0	$107	$172	$10	1.5
Parking lot	11	Compact Fluorescent: Pole mount - Long circular	Timeclock		75	4,380	1	Relamp	No	11	LED Lamps: Pole mount - Long circular	Timeclock	53	4,380	0.1	1,084	0	$137	$189	$11	1.3
111 Gym storage	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,219	0.0	191	0	$24	$270	$0	11.4
136 office	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216		None	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,216	0.0	0	0	$0	$0	$0	0.0

Motor Inventory & Recommendations

		Existing Conditions							Proposed Conditions					Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application	HP Per Motor	Full Load Efficiency	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficiency Motors?	Full Load Efficiency	Install VFDs?	Number of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	HWP 1,2	2	Heating Hot Water Pump	5.0	90.2%	No	W	2,745	5	No	90.2%	Yes	2	1.0	8,513	0	$1,079	$8,394	$0	7.8
Boiler room	AHU	1	Supply Fan	7.5	91.7%	No	W	3,391	4	No	91.7%	Yes	1	2.1	7,759	0	$983	$4,761	$600	4.2
Roof	EF	1	Exhaust Fan	0.8	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-6	1	Supply Fan	5.0	89.5%	Yes	B	3,300		No	89.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-6	1	Exhaust Fan	3.0	89.5%	Yes	B	3,300		No	89.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-9	1	Supply Fan	2.0	86.5%	Yes	B	3,300		No	86.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-9	1	Exhaust Fan	1.0	85.5%	Yes	B	3,300		No	85.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-5	1	Supply Fan	5.0	89.5%	Yes	B	3,300		No	89.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-5	1	Exhaust Fan	5.0	89.5%	Yes	B	3,300		No	89.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-3	1	Supply Fan	7.5	91.7%	No	B	3,300		No	91.7%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-3	1	Exhaust Fan	1.0	85.5%	No	B	3,300		No	85.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-1	1	Supply Fan	7.5	91.7%	No	B	3,300		No	91.7%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-1	1	Exhaust Fan	1.0	85.5%	No	B	3,300		No	85.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-2	1	Supply Fan	10.0	91.7%	No	B	3,300		No	91.7%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-2	1	Exhaust Fan	1.5	86.5%	No	B	3,300		No	86.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-8	1	Supply Fan	1.0	85.5%	Yes	B	3,300		No	85.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-8	1	Exhaust Fan	1.0	85.5%	Yes	B	3,300		No	85.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-4	1	Supply Fan	5.0	89.5%	No	B	3,300		No	89.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	RTU-4	1	Exhaust Fan	1.0	85.5%	No	B	3,300		No	85.5%	No		0.0	0	0	$0	$0	$0	0.0
Roof	EF-4	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	$0	$0	$0	0.0

		Existing Conditions							Proposed Conditions					Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application	HP Per Motor	Full Load Efficiency	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficiency Motors?	Full Load Efficiency	Install VFDs?	Number of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Gym Storage	DHW Recirculation	1	Water Supply Pump	0.1	60.0%	No	W	8,760		No	60.0%	No		0.0	0	0	$0	$0	$0	0.0
Various spaces	Various spaces	8	Supply Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	$0	$0	$0	0.0
Roof	Various spaces	10	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	$0	$0	$0	0.0

Electric HVAC Inventory & Recommendations

		Existing Conditions					Proposed Conditions								Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (MBh)	Remaining Useful Life	ECM #	Install High Efficiency System?	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	Wall hung	1	Electric Resistance Heat		10.23	W		No							0.0	0	0	$0	$0	$0	0.0
Electrical room	Wall hung	1	Electric Resistance Heat		10.23	W		No							0.0	0	0	$0	$0	$0	0.0
Roof	125-Electrical room	1	Split-System AC	1.00		B	6	Yes	1	Split-System AC	1.00		14.00		0.1	185	0	$23	$1,496	$92	59.8
Roof	117 Electrical room	1	Split-System AC	1.00		B	6	Yes	1	Split-System AC	1.00		14.00		0.1	185	0	$23	$1,496	$92	59.8
Roof	118-Server room	1	Split-System AC	1.00		B	6	Yes	1	Split-System AC	1.00		14.00		0.1	185	0	$23	$1,496	$92	59.8
Roof	Unknown	1	Split-System AC	3.00		B	6	Yes	1	Split-System AC	3.00		14.00		0.5	751	0	$95	$4,489	$276	44.3
Roof	Gym - RTU-6	1	Packaged AC	13.00		B	6	Yes	1	Packaged AC	13.00		11.50		1.4	2,085	0	$264	$18,120	$1,027	64.7
Roof	New Hall - RTU-9	1	Packaged AC	18.00		B	6	Yes	1	Packaged AC	18.00		11.50		2.0	2,887	0	$366	$25,089	$1,422	64.7
Roof	5th grade hallway - RTU-5	1	Packaged AC	25.00		B	6	Yes	1	Packaged AC	25.00		10.50		1.5	2,195	0	$278	$42,185	$1,975	144.6
Roof	RTU-3	1	Packaged AC	30.00		B	6	Yes	1	Packaged AC	30.00		10.00		2.0	2,920	0	$370	$66,479	$0	179.7
Roof	RTU-1	1	Packaged AC	20.00		B	6	Yes	1	Packaged AC	20.00		10.50		1.9	2,781	0	$352	$33,748	$1,580	91.3
Roof	Office	1	Split-System AC	2.00		B	6	Yes	1	Split-System AC	2.00		14.00		0.3	371	0	$47	$2,992	$184	59.8
Roof	RTU-2	1	Packaged AC	30.00		B	6	Yes	1	Packaged AC	30.00		10.00		2.0	2,920	0	$370	$66,479	$0	179.7
Roof	Library and Computer lab RTU-8	1	Packaged AC	10.00		B	6	Yes	1	Packaged AC	10.00		10.50		1.0	1,390	0	$176	$17,821	$730	97.0
Roof	RTU-4	1	Packaged AC	30.00		B	6	Yes	1	Packaged AC	30.00		10.00		2.0	2,920	0	$370	$66,479	$0	179.7
Roof	Office	1	Split-System AC	1.50		B	6	Yes	1	Split-System AC	1.50		14.00		0.2	278	0	$35	$2,244	$138	59.8
Upper roof	Cafeteria	4	Packaged AC	7.00		N		No							0.0	0	0	$0	$0	$0	0.0
Classrooms	Classrooms	30	Electric Resistance Heat		3.41	W		No							0.0	0	0	$0	$0	$0	0.0
Mechanical room, Electrical room, kitchen storage and DHW room	Mechanical room, Electrical room, kitchen storage and DHW room	5	Electric Resistance Heat		10.23	W		No							0.0	0	0	$0	$0	$0	0.0

Fuel Heating Inventory & Recommendations

		Existing Conditions				Proposed Conditions							Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	System Quantity	System Type	Output Capacity per Unit (MBh)	Remaining Useful Life	ECM #	Install High Efficiency System?	System Quantity	System Type	Output Capacity per Unit (MBh)	Heating Efficiency	Heating Efficiency Units	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	Boiler 1,2	2	Non-Condensing Hot Water Boiler	849.00	W		No						0.0	0	0	$0	$0	$0	0.0
Roof	RTU-6	1	Furnace	146.00	B	7	Yes	1	Furnace	146.00	95.00%	AFUE	0.0	0	9	$92	$3,308	$400	31.4
Roof	RTU-1	1	Furnace	350.00	B	7	Yes	1	Furnace	350.00	95.00%	AFUE	0.0	0	21	$222	$7,930	$400	34.0
Roof	RTU-3	1	Furnace	475.00	B	7	Yes	1	Furnace	475.00	95.00%	AFUE	0.0	0	29	$301	$10,762	$400	34.4
Roof	RTU-2	1	Furnace	500.00	B	7	Yes	1	Furnace	500.00	95.00%	AFUE	0.0	0	30	$317	$11,329	$400	34.5
Roof	RTU-8	1	Furnace	146.00	B	7	Yes	1	Furnace	146.00	95.00%	AFUE	0.0	0	10	$100	$3,308	$400	29.0
Roof	RTU-4	1	Furnace	300.00	B	7	Yes	1	Furnace	300.00	95.00%	AFUE	0.0	0	20	$206	$6,797	$400	31.0
Roof	RTU-9	1	Furnace	219.00	B	7	Yes	1	Furnace	219.00	95.00%	AFUE	0.0	0	14	$150	$4,962	$400	30.3
Roof	RTU-5	1	Furnace	219.00	B	7	Yes	1	Furnace	219.00	95.00%	AFUE	0.0	0	14	$150	$4,962	$400	30.3

DHW Inventory & Recommendations

		Existing Conditions			Proposed Conditions							Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	System Quantity	System Type	Remaining Useful Life	ECM #	Replace?	System Quantity	System Type	Fuel Type	System Efficiency	Efficiency Units	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	Old section	1	Storage Tank Water Heater (> 50 Gal)	W		No						0.0	0	0	$0	$0	$0	0.0
Boiler room	New section	1	Storage Tank Water Heater (> 50 Gal)	B	8	Yes	1	Storage Tank Water Heater (> 50 Gal)	Natural Gas	90.00%	Et	0.0	0	13	$138	$8,669	$300	60.7

Low-Flow Device Recommendations

	Recommedation Inputs					Energy Impact & Financial Analysis						
Location	ECM #	Device Quantity	Device Type	Existing Flow Rate (gpm)	Proposed Flow Rate (gpm)	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Restrooms	9	22	Faucet Aerator (Lavatory)	2.20	0.50	0.0	0	31	$330	$158	$0	0.5

Walk-In Cooler/Freezer Inventory & Recommendations

	Existing Conditions		Proposed Conditions				Energy Impact & Financial Analysis						
Location	Cooler/ Freezer Quantity	Case Type/Temperature	ECM #	Install EC Evaporator Fan Motors?	Install Electric Defrost Control?	Install Evaporator Fan Control?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Cooler (35F to 55F)		No	No	No	0.0	0	0	$0	$0	$0	0.0
Kitchen	1	Medium Temp Freezer (0F to 30F)		No	No	No	0.0	0	0	$0	$0	$0	0.0

Commercial Refrigerator/Freezer Inventory & Recommendations

	Existing Conditions			Proposed Conditions		Energy Impact & Financial Analysis						
Location	Quantity	Refrigerator/ Freezer Type	ENERGY STAR Qualified?	ECM #	Install ENERGY STAR Equipment?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Refrigerator Chest	Yes		No	0.0	0	0	$0	$0	$0	0.0
Kitchen	1	Refrigerator Chest	Yes		No	0.0	0	0	$0	$0	$0	0.0
Kitchen	1	Stand-Up Refrigerator, Solid Door (16 - 30 cu. ft.)	Yes		No	0.0	0	0	$0	$0	$0	0.0
Kitchen	1	Refrigerator Chest	Yes		No	0.0	0	0	$0	$0	$0	0.0

Cooking Equipment Inventory & Recommendations

	Existing Conditions			Proposed Conditions		Energy Impact & Financial Analysis						
Location	Quantity	Equipment Type	High Efficiency Equipement?	ECM #	Install High Efficiency Equipment?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Gas Convection Oven (Half Size)	Yes		No	0.0	0	0	$0	$0	$0	0.0
Kitchen	1	Gas Convection Oven (Half Size)	Yes		No	0.0	0	0	$0	$0	$0	0.0
Kitchen	1	Insulated Food Holding Cabinet (1/2 Size)	Yes		No	0.0	0	0	$0	$0	$0	0.0

Plug Load Inventory

	Existing Conditions			
Location	Quantity	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified?
Lillian M. Dunfee ES	133	Desktop Computer	145.0	Yes
Lillian M. Dunfee ES	10	Chrome book carts	40.0	Yes
Lillian M. Dunfee ES	6	Servers	1,200.0	Yes
Lillian M. Dunfee ES	14	Printer Small	60.0	Yes
Lillian M. Dunfee ES	3	Printer Medium	80.0	Yes
Lillian M. Dunfee ES	5	Printer Big	200.0	Yes
Lillian M. Dunfee ES	35	Projector	200.0	Yes
Lillian M. Dunfee ES	3	Microwave	900.0	Yes
Lillian M. Dunfee ES	1	Refrigerator Small	60.0	Yes
Lillian M. Dunfee ES	1	Refrigerator Medium	80.0	Yes
Lillian M. Dunfee ES	4	Refrigerator Large	220.0	Yes
Lillian M. Dunfee ES	2	Toaster oven	1,200.0	Yes
Lillian M. Dunfee ES	3	Portable fan	60.0	Yes
Lillian M. Dunfee ES	5	Television - CRT	120.0	Yes
Lillian M. Dunfee ES	2	Television- LCD	100.0	Yes
Lillian M. Dunfee ES	1	Hot and Cold Dispenser	520.0	Yes
Lillian M. Dunfee ES	3	Steam Tables	1,500.0	Yes
Lillian M. Dunfee ES	35	Smart Board	5.0	Yes
Lillian M. Dunfee ES	1	Kiln	11,520.0	Yes

Vending Machine Inventory & Recommendations

	Existing Conditions		Proposed Conditions		Energy Impact & Financial Analysis						
Location	Quantity	Vending Machine Type	ECM #	Install Controls?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Teacher's lounge	1	Refrigerated	10	Yes	0.2	1,612	0	$204	$230	$50	0.9

APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE

EUI is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.

LEARN MORE AT energystar.gov

ENERGY STAR® Statement of Energy Performance

57

ENERGY STAR® Score[1]

Lillian M Dunfee Elementary School

Primary Property Type: K-12 School
Gross Floor Area (ft²): 70,817
Built: 1974

For Year Ending: January 31, 2019
Date Generated: July 30, 2019

1. The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.

Property & Contact Information

Property Address	Property Owner	Primary Contact
Lillian M Dunfee Elementary School 128 Barnegat Blvd South Barnegat, New Jersey 08005	Barnegat Township School District 550 BARENGAT BLVD. NORTH Barnegat, NJ 08005 (___)___-_____	Stephen Brennan 550 BARENGAT BLVD. NORTH Barnegat, NJ 08005 609-698-5800 SBRENNAN@BARNEGATSCHOOLS.CO

Property ID: 7071644

Energy Consumption and Energy Use Intensity (EUI)

Site EUI
52.7 kBtu/ft²

Source EUI
105.4 kBtu/ft²

Annual Energy by Fuel	
Natural Gas (kBtu)	1,703,015 (46%)
Electric - Grid (kBtu)	2,027,082 (54%)

National Median Comparison	
National Median Site EUI (kBtu/ft²)	56.4
National Median Source EUI (kBtu/ft²)	113
% Diff from National Median Source EUI	-7%
Annual Emissions	
Greenhouse Gas Emissions (Metric Tons CO2e/year)	296

Signature & Stamp of Verifying Professional

I _____ (Name) verify that the above information is true and correct to the best of my knowledge.

Signature: _____ Date: _____

Licensed Professional

____ _____
,
(___)___-_____
_____

Professional Engineer Stamp (if applicable)

APPENDIX C: GLOSSARY

TERM	DEFINITION
Blended Rate	Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is $22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour.
Btu	*British thermal unit*: a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit.
CHP	*Combined heat and power*. Also referred to as cogeneration.
COP	*Coefficient of performance*: a measure of efficiency in terms of useful energy delivered divided by total energy input.
Demand Response	Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives.
DCV	*Demand control ventilation*: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need.
US DOE	*United States Department of Energy*
EC Motor	*Electronically commutated motor*
ECM	*Energy conservation measure*
EER	*Energy efficiency ratio*: a measure of efficiency in terms of cooling energy provided divided by electric input.
EUI	*Energy Use Intensity:* measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance.
Energy Efficiency	Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service.
ENERGY STAR®	ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.
EPA	*United States Environmental Protection Agency*
Generation	The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil).
GHG	*Greenhouse gas* gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.
gpf	*Gallons per flush*

gpm	*Gallon per minute*
HID	*High intensity discharge:* high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	*Horsepower*
HPS	*High-pressure sodium*: a type of HID lamp.
HSPF	*Heating seasonal performance factor:* a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	*Heating, ventilating, and air conditioning*
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	*Integrated part load value:* a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units.
kW	*Kilowatt*: equal to 1,000 Watts.
kWh	*Kilowatt-hour*: 1,000 Watts of power expended over one hour.
LED	*Light emitting diode*: a high-efficiency source of light with a long lamp life.
LGEA	*Local Government Energy Audit*
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, that is implemented in a building system to reduce total energy consumption.
MH	*Metal halide*: a type of HID lamp.
MBh	*Thousand Btu per hour*
MBtu	*One thousand British thermal units*
MMBtu	*One million British thermal units*
MV	*Mercury Vapor:* a type of HID lamp.
NJBPU	*New Jersey Board of Public Utilities*
NJCEP	*New Jersey's Clean Energy Program:* NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money and the environment.
psig	Pounds per square inch gauge.
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	*Photovoltaic:* refers to an electronic device capable of converting incident light directly into electricity (direct current).

SEER	*Seasonal energy efficiency ratio:* a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	*Statement of energy performance:* a summary document from the ENERGY STAR® Portfolio Manager®.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC	*Solar renewable energy credit*: a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of 1/8th of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use
VAV	*Variable air volume*
VFD	*Variable frequency drive*: a controller used to vary the speed of an electric motor.
WaterSense™	The symbol for water efficiency. The WaterSense™ program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.