Local Government Energy Audit:
Energy Audit Report

Maintenance Garage

151 Don Connor Blvd

Jackson, NJ 08527

Jackson Township BOE

June 22, 2018

Final Report by:

TRC Energy Services

Copyright ©2018 TRC Energy Services. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.

Disclaimer

The intent of this energy analysis report is to identify energy savings opportunities and recommend upgrades to the facility's energy using equipment and systems. Approximate savings are included in this report to help make decisions about reducing energy use at the facility. This report, however, is not intended to serve as a detailed engineering design document. Further design and analysis may be necessary in order to implement some of the measures recommended in this report.

The energy conservation measures and estimates of energy savings have been reviewed for technical accuracy. However, estimates of final energy savings are not guaranteed, because final savings may depend on behavioral factors and other uncontrollable variables. TRC Energy Services (TRC) and New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

Estimated installation costs are based on TRC's experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from *RS Means*. The owner of the facility is encouraged to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Since actual installed costs can vary widely for certain measures and conditions, TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. The owner of the facility should review available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

Table of Contents

1 Executive Summary 1

1.1 Facility Summary 1
1.2 Your Cost Reduction Opportunities 1

Energy Conservation Measures 1
Energy Efficient Practices 2
On-Site Generation Measures 2

1.3 Implementation Planning 3

2 Facility Information and Existing Conditions 4

2.1 Project Contacts 4
2.2 General Site Information 4
2.3 Building Occupancy 4
2.4 Building Envelope 4
2.5 On-Site Generation 5
2.6 Energy-Using Systems 5

Lighting System 5
Heating System 6
Direct Expansion Air Conditioning System (DX) 6
Building Plug Load 6

3 Site Energy Use and Costs 7

3.1 Total Cost of Energy 7
3.2 Electricity Usage 8
3.3 Natural Gas Usage 9
3.4 Benchmarking 10
3.5 Energy End-Use Breakdown 11

4 Energy Conservation Measures 12

4.1 Recommended ECMs 12
4.1.1 Lighting Upgrades 13

ECM 1: Install LED Fixtures 13
ECM 2: Retrofit Fixtures with LED Lamps 14

4.1.2 Lighting Control Measures 15

ECM 3: Install Occupancy Sensor Lighting Controls 15

4.1.3 Gas-Fired Heating System Replacements 16

5 Energy Efficient Practices 17

Reduce Air Leakage 17
Use Fans to Reduce Cooling Load 17

6 On-Site Generation Measures 18

6.1 Photovoltaic 18
6.2 Combined Heat and Power 20

7 Demand Response 21
8 Project Funding / Incentives 22
8.1 SmartStart 23
8.2 Direct Install 24
8.3 Energy Savings Improvement Program 25
9 Energy Purchasing and Procurement Strategies 26
9.1 Retail Electric Supply Options 26
9.2 Retail Natural Gas Supply Options 26

Appendix A: Equipment Inventory & Recommendations

Appendix B: ENERGY STAR® Statement of Energy Performance

Table of Figures

Figure 1 – Previous 12 Month Utility Costs 1
Figure 2 – Potential Post-Implementation Costs 1
Figure 3 – Summary of Energy Reduction Opportunities 2
Figure 4 – Project Contacts 4
Figure 5 - Building Schedule 4
Figure 6 - Utility Summary 7
Figure 7 - Energy Cost Breakdown 7
Figure 8 - Electric Usage & Demand 8
Figure 9 - Electric Usage & Demand 8
Figure 10 - Natural Gas Usage 9
Figure 11 - Natural Gas Usage 9
Figure 12 - Energy Use Intensity Comparison – Existing Conditions 10
Figure 13 - Energy Use Intensity Comparison – Following Installation of Recommended Measures 10
Figure 14 - Energy Balance (% and kBtu/SF) 11
Figure 15 – Summary of Recommended ECMs 12
Figure 16 – Summary of Lighting Upgrade ECMs 13
Figure 17 – Summary of Lighting Control ECMs 15
Figure 18 - Summary of Gas-Fired Heating Replacement ECMs 16
Figure 19 - Photovoltaic Screening 18
Figure 20 - Combined Heat and Power Screening 20
Figure 21 - ECM Incentive Program Eligibility 22

1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for the Jackson Township Board of Education Maintenance Garage.

The goal of an LGEA report is to provide you with information on how your facility uses energy, identify energy conservation measures (ECMs) that can reduce your energy use, and provide information and assistance to help facilities implement ECMs. The LGEA report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

This study was conducted by TRC Energy Services (TRC), as part of a comprehensive effort to assist New Jersey school districts in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

1.1 Facility Summary

Maintenance Garage is a 4800 square-foot facility comprised an office, break room and a garage. This single-story facility operates from 6:00 AM to 2:00 PM during the weekdays all year and remains closed during the weekends.

Space cooling is provided by three gas fired warm air unit heaters with supply fans. Only the office and the break room have space cooling provided by window AC units. Lighting at the facility consists of linear T8 tubes.

A thorough description of the facility and our observations are in Section 2.

1.2 Your Cost Reduction Opportunities

Energy Conservation Measures

TRC evaluated four measures which together represent an opportunity for Maintenance Garage to reduce annual energy costs by $879 and annual greenhouse gas emissions by 6,980 lbs CO_2e. We estimate that if all measures were implemented as recommended, the project would pay for itself in 5.1 years. The breakdown of existing and potential utility costs after project implementation are illustrated in Figure 1 and Figure 2, respectively. Together these measures represent an opportunity to reduce Maintenance Garage's annual energy use by 7%.

Figure 1 – Previous 12 Month Utility Costs

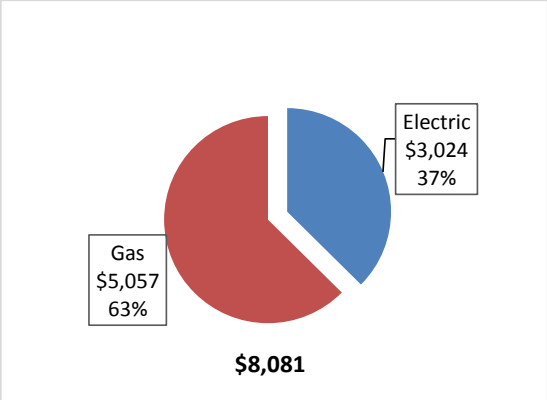

Figure 2 – Potential Post-Implementation Costs

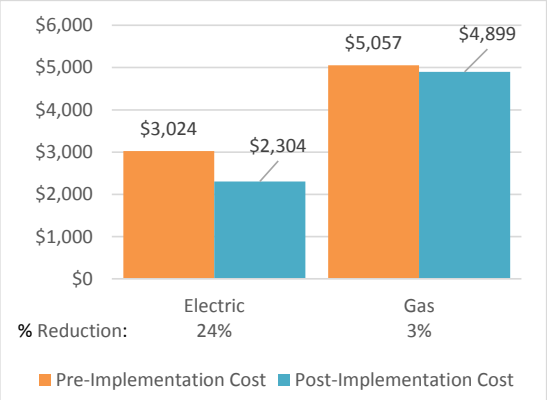

A detailed description of Maintenance Garage's existing energy use can be found in Section 3.

Estimates of the total cost, energy savings, and financial incentives for the proposed energy efficient upgrades are summarized below in Figure 3. A brief description of each category can be found below and a description of savings opportunities can be found in Section 4.

Figure 3 – Summary of Energy Reduction Opportunities

Energy Conservation Measure		Recommend?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Lighting Upgrades			**5,479**	**1.1**	**0.0**	**$708.49**	**$3,178.84**	**$680.00**	**$2,498.84**	**3.5**	**5,517**
ECM 1	Install LED Fixtures	Yes	3,066	0.5	0.0	$396.47	$1,562.71	$400.00	$1,162.71	2.9	3,087
ECM 2	Retrofit Fixtures with LED Lamps	Yes	2,413	0.6	0.0	$312.02	$1,616.13	$280.00	$1,336.13	4.3	2,430
Lighting Control Measures			**92**	**0.0**	**0.0**	**$11.88**	**$232.00**	**$0.00**	**$232.00**	**19.5**	**93**
ECM 3	Install Occupancy Sensor Lighting Controls	Yes	92	0.0	0.0	$11.88	$232.00	$0.00	$232.00	19.5	93
Gas Heating (HVAC/Process) Replacement			**0**	**0.0**	**11.7**	**$158.16**	**$1,789.79**	**$0.00**	**$1,789.79**	**11.3**	**1,370**
ECM 4	Install High Efficiency Unit Heaters	Yes	0	0.0	11.7	$158.16	$1,789.79	$0.00	$1,789.79	11.3	1,370
TOTALS			**5,571**	**1.1**	**11.7**	**$878.53**	**$5,200.63**	**$680.00**	**$4,520.63**	**5.1**	**6,980**

* - All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

** - Simple Payback Period is based on net measure costs (i.e. after incentives).

Lighting Upgrades generally involve the replacement of existing lighting components such as lamps and ballasts (or the entire fixture) with higher efficiency lighting components. These measures save energy by reducing the power used by the lighting components due to improved electrical efficiency.

Lighting Controls measures generally involve the installation of automated controls to turn off lights or reduce light output when not needed. Automated control reduces reliance on occupant behavior for adjusting lights. These measures save energy by reducing the amount of time lights are on.

Gas Heating (HVAC/Process) measures generally involve replacing older inefficient hydronic heating systems with modern energy efficient systems. Gas heating systems can provide equivalent heating compared to older systems at a reduced energy cost. These measures save energy by reducing the fuel demands for heating, due to improved combustion and heat transfer efficiency.

Energy Efficient Practices

TRC also identified two low cost (or no cost) energy efficient practices. A facility's energy performance can be significantly improved by employing certain behavioral or operational adjustments and by performing better routine maintenance on building systems. These practices can extend equipment lifetime, improve occupant comfort, provide better health and safety, as well as reduce annual energy and O&M costs. Potential opportunities identified at Maintenance Garage include:

- Reduce Air Leakage
- Use Fans to Reduce Cooling Load

For details on these energy efficient practices, please refer to Section 5.

On-Site Generation Measures

TRC evaluated the potential for installing on-site generation for Maintenance Garage. Based on the configuration of the site and its loads there is a low potential for installing any PV and combined heat and power self-generation measures.

For details on our evaluation and on-site generation potential, please refer to Section 6.

1.3 Implementation Planning

To realize the energy savings from the ECMs listed in this report, a project implementation plan must be developed. Available capital must be considered and decisions need to be made whether it is best to pursue individual ECMs separately, groups of ECMs, or a comprehensive approach where all ECMs are implemented together, possibly in conjunction with other facility upgrades or improvements.

Rebates, incentives, and financing are available from NJCEP, as well as other sources, to help reduce the costs associated with the implementation of energy efficiency projects. Prior to implementing any measure, please review the relevant incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives prior to purchasing materials or commencing with installation. The ECMs outlined in this report may qualify under the following program(s):

- SmartStart
- Direct Install
- Energy Savings Improvement Program (ESIP)

For facilities wanting to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate in this program, you may utilize internal resources, or an outside firm or contractor, to do the final design of the Energy Conservation Measures (ECMs) and do the installation. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation. The incentive estimates listed above in Figure 3 are based on the SmartStart program. More details on this program and others are available in Section 8.

This facility may also qualify for the Direct Install program which can provide turnkey installation of multiple measures, through an authorized network of participating contractors. This program can provide substantially higher incentives that SmartStart, up to 70% of the cost of selected measures, although measure eligibility will have to be assessed and be verified by the designated Direct Install contractor and, in most cases, they will perform the installation work.

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the Energy Savings Improvement Program (ESIP). Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. An LGEA report (or other approved energy audit) is required for participation in ESIP. Please refer to Section 8.3 for additional information on the ESIP Program.

The Demand Response Energy Aggregator is a (non-NJCEP) program designed to reduce electric loads at commercial facilities, when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. Demand Response (DR) service providers (a.k.a. Curtailment Service Providers) are registered with PJM, the independent system operator (ISO) for mid-Atlantic state region that is charged with maintaining electric grid reliability. By enabling grid operators to call upon commercial facilities to reduce their electric usage during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment Service Providers provide regular payments to medium and large consumers of electric power for their participation in DR programs. Program participation is voluntary and facilities receive payments whether or not they are called upon to curtail their load during times of peak demand. Refer to Section 7 for additional information on this program.

Additional information on relevant incentive programs is in Section 8 or: www.njcleanenergy.com/ci.

2 FACILITY INFORMATION AND EXISTING CONDITIONS

2.1 Project Contacts

Figure 4 – Project Contacts

Name	Role	E-Mail	Phone #
Customer			
Michelle Richardson	Business Adminsitrator	mrichardson@jacksonsd.org	(732) 833-4600
John Blair	Energy Education Specialist	jblair@jacksonsd.org	732-833-4600 Extn: 4380
TRC Energy Services			
Smruti Srinivasan	Auditor	ssrinivasan@trcsolutions.com	(732) 855-0033

2.2 General Site Information

On December 11, 2017, TRC performed an energy audit at the Jackson Board of Education Maintenance Garage located in Jackson, New Jersey. TRC's team met with Energy Education Specialist John Blair to review the facility operations and help focus our investigation on specific energy-using systems.

Maintenance Garage is a 4800 square-foot facility an office, break room and a garage. This single-story facility operates from 6:00 AM to 2:00 PM during the weekdays, all year and is closed during the weekends.

Space cooling is provided by three gas-fired warm air unit heaters with supply fan. Only the office and the break room have space cooling provided by window AC units. Lighting at the facility consists of linear T8 tubes.

2.3 Building Occupancy

The typical schedule is presented in the table below. During a typical day, the facility is occupied by approximately ten staff members.

Figure 5 - Building Schedule

Building Name	Weekday/Weekend	Operating Schedule
Maintenance Garage	Weekday	6 AM - 2 PM
Maintenance Garage	Weekend	No operation

2.4 Building Envelope

The Maintenance garage was constructed in 1979. The building and the roof are constructed using standing seam metal panels. The windows in the facility are single pane. The regular exterior doors are made of aluminum and five other hoist doors that are in good condition.

2.5 On-Site Generation

Maintenance Garage does not have any on-site electric generation capacity.

2.6 Energy-Using Systems

Please see Appendix A: Equipment Inventory & Recommendations for an inventory of the facility's equipment.

Lighting System

Lighting at the facility is provided mostly by 32-Watt linear fluorescent T8 lamps with electronic ballasts. Lighting control in most spaces is provided by wall switches.

The building's exterior lighting consists 200-Watt high pressure sodium (HPS) wall pack fixtures controlled by photocells.

Heating System

The heating system consists of three gas fired warm air unit heaters (Reznor) with supply fans providing heat in the garage. These have an input capacity of 61.5 kBtuh and an efficiency of 81%. The units are approximately 15 years old. The offices are heated using electric heaters located in the respective spaces. The Space temperatures are controlled using thermostats.

Direct Expansion Air Conditioning System (DX)

The office and breakroom are cooled using one window AC unit with integrated controls, each having capacities 1 ton and 0.5 ton respectively. Both units are less than six years old and well maintained.

Building Plug Load

The building plug loads include three computers, a refrigerator, microwave oven, coffee machine and assorted tools in the shop.

3 SITE ENERGY USE AND COSTS

Utility data for electricity and natural gas was analyzed to identify opportunities for savings. In addition, data for electricity and natural gas was evaluated to determine the annual energy performance metrics for the building in energy cost per square foot and energy usage per square foot. These metrics are an estimate of the relative energy efficiency of this building. There are many factors that could cause the energy use of this building to vary from the "typical" energy usage profile for facilities with similar characteristics. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and energy efficient behavior of occupants all contribute to benchmarking scores. Please refer to the Benchmarking section within Section 3.4 for additional information.

3.1 Total Cost of Energy

The following energy consumption and cost data is based on the last 12-month period of utility billing data that was provided for each utility. A profile of the annual energy consumption and energy cost of the facility was developed from this information.

Figure 6 - Utility Summary

Utility Summary for Maintenance Garage		
Fuel	**Usage**	**Cost**
Electricity	23,388 kWh	$3,024
Natural Gas	3,741 Therms	$5,057
Total		**$8,081**

The current annual energy cost for this facility is $8,081 as shown in the chart below.

Figure 7 - Energy Cost Breakdown

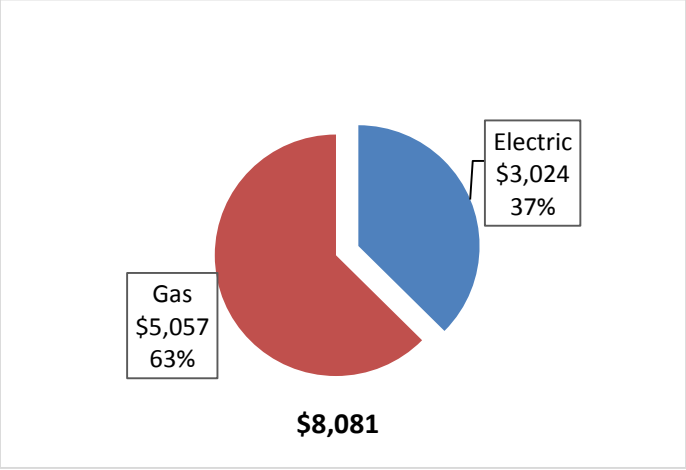

3.2 Electricity Usage

Electricity is provided by JCP&L. The average electric cost over the past 12 months was $0.129/kWh, which is the blended rate that includes energy supply, distribution, and other charges. This rate is used throughout the analyses in this report to assess energy costs and savings. The electric use and demand profile indicates increased winter time use due to electric heaters. The monthly electricity consumption and peak demand are shown in the chart below.

Figure 8 - Electric Usage & Demand

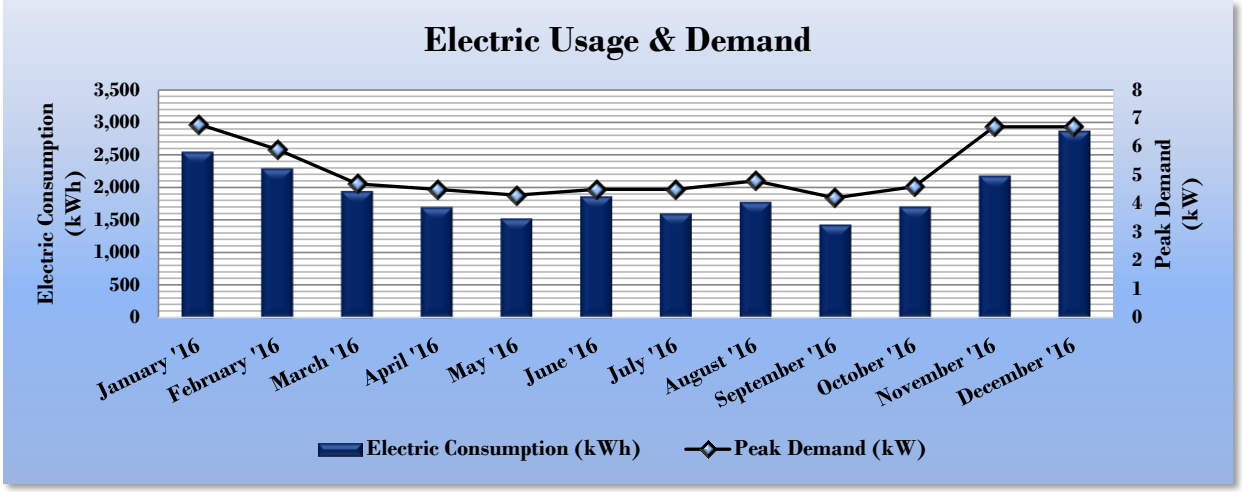

Figure 9 - Electric Usage & Demand

Electric Billing Data for Maintenance Garage					
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost
1/31/16	30	2,538	7		$298
2/29/16	29	2,288	6		$323
3/31/16	31	1,940	5		$239
4/29/16	29	1,696	5		$216
5/31/16	32	1,521	4		$202
6/30/16	30	1,860	5		$243
8/1/16	32	1,598	5		$218
8/30/16	29	1,776	5		$235
9/30/16	31	1,429	4		$200
10/31/16	31	1,702	5		$229
11/30/16	30	2,178	7		$276
12/31/16	31	2,862	7		$345
Totals	**365**	**23,388**	**6.8**	**$0**	**$3,024**
Annual	**365**	**23,388**	**6.8**	**$0**	**$3,024**

3.3 Natural Gas Usage

Natural gas is provided by NJ Natural Gas. The average gas cost for the past 12 months is $1.352/therm, which is the blended rate used throughout the analyses in this report. The monthly gas consumption is shown in the chart below. The gas usage profile is typical of a building using fuel fired heating equipment.

Figure 10 - Natural Gas Usage

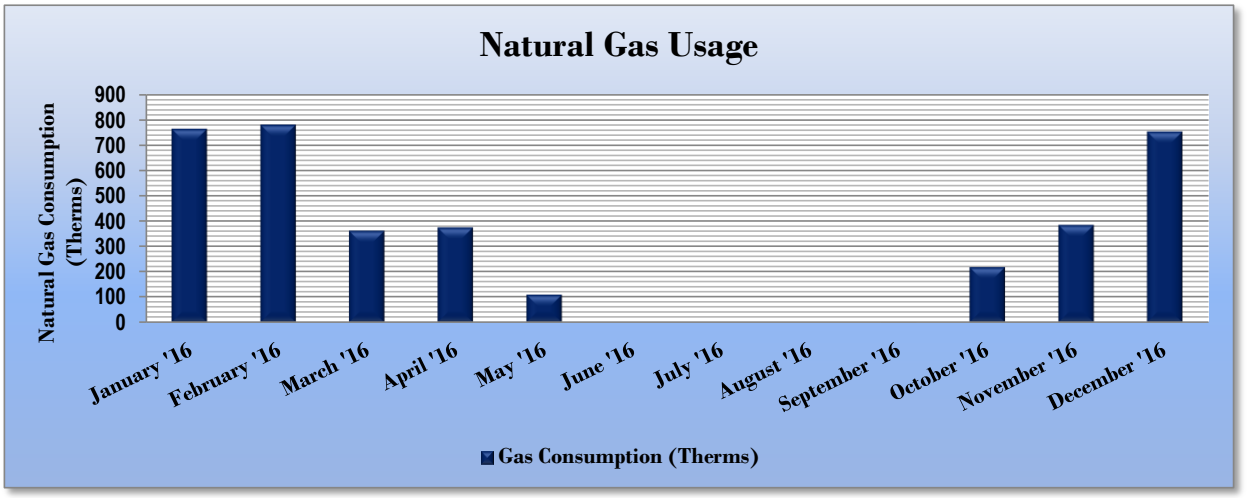

Figure 11 - Natural Gas Usage

Gas Billing Data for Maintenance Garage			
Period Ending	Days in Period	Natural Gas Usage (Therms)	Natural Gas Cost
2/4/16	30	763	$886
3/4/16	29	779	$903
4/6/16	33	361	$469
5/4/16	28	374	$482
6/8/16	35	109	$207
7/8/16	30	0	$93
8/8/16	31	0	$93
9/1/16	24	0	$74
10/3/16	32	1	$97
11/4/16	32	218	$297
12/2/16	28	384	$501
1/4/17	33	751	$956
Totals	**365**	**3,741**	**$5,057**
Annual	**365**	**3,741**	**$5,057**

3.4 Benchmarking

This facility was benchmarked using Portfolio Manager, an online tool created and managed by the United States Environmental Protection Agency (EPA) through the ENERGY STAR® program. Portfolio Manager analyzes your building's consumption data, cost information, and operational use details and then compares its performance against a national median for similar buildings of its type. Metrics provided by this analysis are Energy Use Intensity (EUI) and an ENERGY STAR® score for select building types.

The EUI is a measure of a facility's energy consumption per square foot, and it is the standard metric for comparing buildings' energy performance. Comparing the EUI of a building with the national median EUI for that building type illustrates whether that building uses more or less energy than similar buildings of its type on a square foot basis. EUI is presented in terms of "site energy" and "source energy." Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.

Figure 12 - Energy Use Intensity Comparison – Existing Conditions

Energy Use Intensity Comparison - Existing Conditions		
	Maintenance Garage	National Median Building Type: Garage
Source Energy Use Intensity (kBtu/ft^2)	134.0	123.1
Site Energy Use Intensity (kBtu/ft^2)	94.6	78.8

Implementation of all recommended measures in this report would improve the building's estimated EUI significantly, as shown in the table below:

Figure 13 - Energy Use Intensity Comparison – Following Installation of Recommended Measures

Energy Use Intensity Comparison - Following Installation of Recommended Measures		
	Maintenance Garage	National Median Building Type: Garage
Source Energy Use Intensity (kBtu/ft^2)	119.0	123.1
Site Energy Use Intensity (kBtu/ft^2)	88.2	78.8

Many types of commercial buildings are also eligible to receive an ENERGY STAR® score. This score is a percentile ranking from 1 to 100. It compares your building's energy performance to similar buildings nationwide. A score of 50 represents median energy performance, while a score of 75 means your building performs better than 75 percent of all similar buildings nationwide and may be eligible for ENERGY STAR® certification. Your building is not one of the building categories that are eligible to receive a score.

A Portfolio Manager Statement of Energy Performance (SEP) was generated for this facility, see Appendix B: ENERGY STAR® Statement of Energy Performance.

For more information on ENERGY STAR® certification go to: https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1.

A Portfolio Manager account has been created online for your facility and you will be provided with the login information for the account. We encourage you to update your utility information in Portfolio Manager regularly, so that you can keep track of your building's performance. Free online training is available to help you use ENERGY STAR®Portfolio Manager to track your building's performance at: https://www.energystar.gov/buildings/training.

3.5 Energy End-Use Breakdown

In order to provide a complete overview of energy consumption across building systems, an energy balance was performed at this facility. An energy balance utilizes standard practice engineering methods to evaluate all components of the various electric and fuel-fired systems found in a building to determine their proportional contribution to overall building energy usage. This chart of energy end uses highlights the relative contribution of each equipment category to total energy usage. This can help determine where the greatest benefits might be found from energy efficiency measures.

Figure 14 - Energy Balance (% and kBtu/SF)

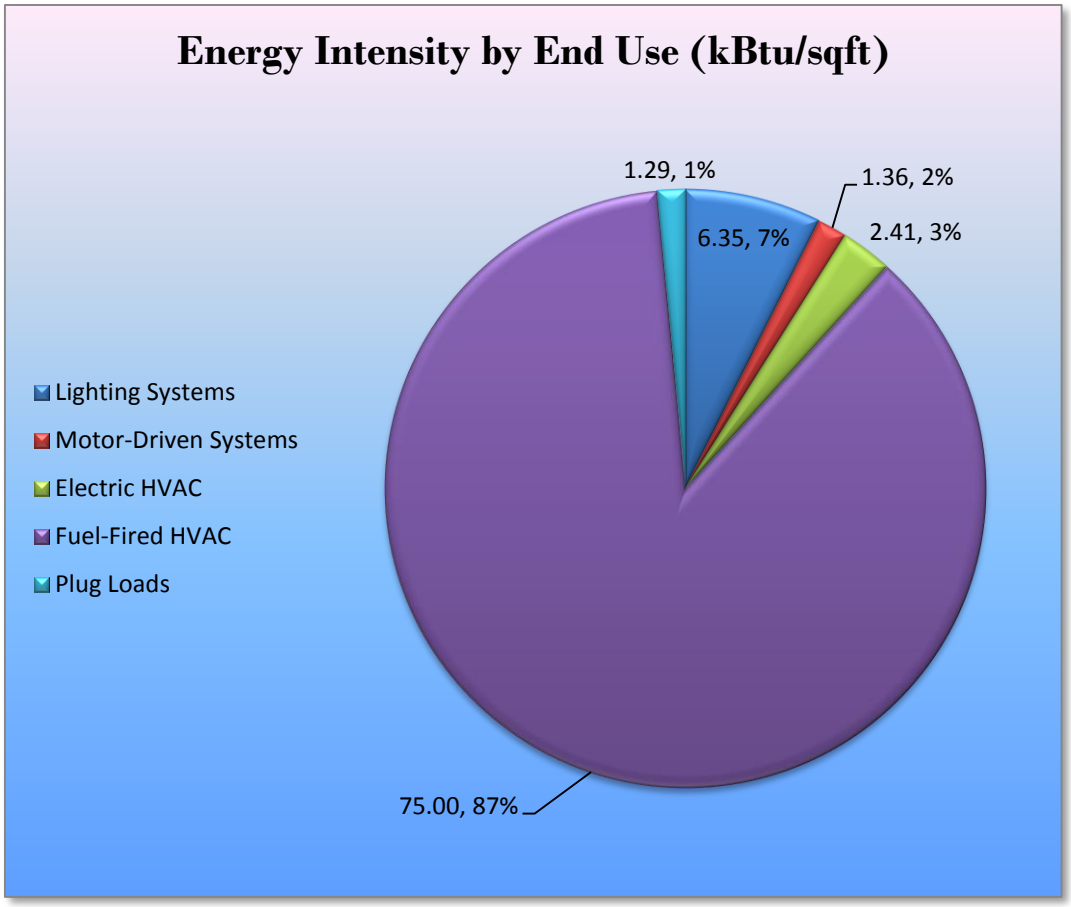

4 ENERGY CONSERVATION MEASURES

Level of Analysis

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information to the Maintenance Garage regarding financial incentives for which they may qualify to implement the recommended measures. For this audit report, most measures have received only a preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to demonstrate project cost-effectiveness and help prioritize energy measures. Savings are based on the New Jersey Clean Energy Program Protocols to Measure Resource Savings dated June 29, 2016, approved by the New Jersey Board of Public Utilities. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances. A higher level of investigation may be necessary to support any custom SmartStart or Pay for Performance, or Direct Install incentive applications. Financial incentives for the ECMs identified in this report have been calculated based the NJCEP prescriptive SmartStart program. Some measures and proposed upgrade projects may be eligible for higher incentives than those shown below through other NJCEP programs as described in Section 8.

The following sections describe the evaluated measures.

4.1 Recommended ECMs

The measures below have been evaluated by the auditor and are recommended for implementation at the facility.

Figure 15 – Summary of Recommended ECMs

Energy Conservation Measure		Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)*	Estimated Net Cost ($)	Simple Payback Period (yrs)**	CO_2e Emissions Reduction (lbs)
Lighting Upgrades		**5,479**	**1.1**	**0.0**	**$708.49**	**$3,178.84**	**$680.00**	**$2,498.84**	**3.5**	**5,517**
ECM 1	Install LED Fixtures	3,066	0.5	0.0	$396.47	$1,562.71	$400.00	$1,162.71	2.9	3,087
ECM 2	Retrofit Fixtures with LED Lamps	2,413	0.6	0.0	$312.02	$1,616.13	$280.00	$1,336.13	4.3	2,430
Lighting Control Measures		**92**	**0.0**	**0.0**	**$11.88**	**$232.00**	**$0.00**	**$232.00**	**19.5**	**93**
ECM 3	Install Occupancy Sensor Lighting Controls	92	0.0	0.0	$11.88	$232.00	$0.00	$232.00	19.5	93
Gas Heating (HVAC/Process) Replacement		**0**	**0.0**	**11.7**	**$158.16**	**$1,789.79**	**$0.00**	**$1,789.79**	**11.3**	**1,370**
ECM 4	Install High Efficiency Unit Heaters	0	0.0	11.7	$158.16	$1,789.79	$0.00	$1,789.79	11.3	1,370
TOTALS		**5,571**	**1.1**	**11.7**	**$878.53**	**$5,200.63**	**$680.00**	**$4,520.63**	**5.1**	**6,980**

* - All incentives presented in this table are based on NJ Smart Start Building equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

** - Simple Payback Period is based on net measure costs (i.e. after incentives).

4.1.1 Lighting Upgrades

Our recommendations for upgrades to existing lighting fixtures are summarized in Figure 16 below.

Figure 16 – Summary of Lighting Upgrade ECMs

Energy Conservation Measure		Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)	Estimated Net Cost ($)	Simple Payback Period (yrs)	CO_2e Emissions Reduction (lbs)
Lighting Upgrades		**5,479**	**1.1**	**0.0**	**$708.49**	**$3,178.84**	**$680.00**	**$2,498.84**	**3.5**	**5,517**
ECM 1	Install LED Fixtures	3,066	0.5	0.0	$396.47	$1,562.71	$400.00	$1,162.71	2.9	3,087
ECM 2	Retrofit Fixtures with LED Lamps	2,413	0.6	0.0	$312.02	$1,616.13	$280.00	$1,336.13	4.3	2,430

During lighting upgrade planning and design, we recommend a comprehensive approach that considers both the efficiency of the lighting fixtures and how they are controlled.

ECM 1: Install LED Fixtures

Summary of Measure Economics

Interior/ Exterior	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)	Estimated Net Cost ($)	Simple Payback Period (yrs)	CO_2e Emissions Reduction (lbs)
Interior	0	0.0	0.0	$0.00	$0.00	$0.00	$0.00	0.0	0
Exterior	3,066	0.5	0.0	$396.47	$1,562.71	$400.00	$1,162.71	2.9	3,087

Measure Description

We recommend replacing existing fixtures containing HID lamps with new high-performance LED light fixtures. This measure saves energy by installing LEDs which use less power than other technologies with a comparable light output.

Additional savings from lighting maintenance can be anticipated since LEDs have lifetimes longer than other lighting technologies.

ECM 2: Retrofit Fixtures with LED Lamps

Summary of Measure Economics

Interior/ Exterior	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)	Estimated Net Cost ($)	Simple Payback Period (yrs)	CO_2e Emissions Reduction (lbs)
Interior	2,413	0.6	0.0	$312.02	$1,616.13	$280.00	$1,336.13	4.3	2,430
Exterior	0	0.0	0.0	$0.00	$0.00	$0.00	$0.00	0.0	0

Measure Description

We recommend retrofitting existing incandescent and T8 tube lighting technologies with LED lamps. Many LED tube lamps are direct replacements for existing fluorescent lamps and can be installed while leaving the fluorescent fixture ballast in place. LED bulbs can be used in existing fixtures as a direct replacement for most other lighting technologies. This measure saves energy by installing LEDs which use less power than other lighting technologies yet provide equivalent lighting output for the space.

Additional savings from lighting maintenance can be anticipated since LEDs have lifetimes which are more than twice that of fluorescent tubes.

4.1.2 Lighting Control Measures

Our recommendations for lighting control measures are summarized in Figure 17 below.

Figure 17 – Summary of Lighting Control ECMs

Energy Conservation Measure		Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)	Estimated Net Cost ($)	Simple Payback Period (yrs)	CO_2e Emissions Reduction (lbs)
Lighting Control Measures		**92**	**0.0**	**0.0**	**$11.88**	**$232.00**	**$0.00**	**$232.00**	**19.5**	**93**
ECM 3	Install Occupancy Sensor Lighting Controls	92	0.0	0.0	$11.88	$232.00	$0.00	$232.00	19.5	93

During lighting upgrade planning and design, we recommend a comprehensive approach that considers both the efficiency of the lighting fixtures and how they are controlled.

ECM 3: Install Occupancy Sensor Lighting Controls

Summary of Measure Economics

Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)	Estimated Net Cost ($)	Simple Payback Period (yrs)	CO_2e Emissions Reduction (lbs)
92	0.0	0.0	$11.88	$232.00	$0.00	$232.00	19.5	93

Measure Description

We recommend installing occupancy sensors to control lighting fixtures that are currently controlled by manual switches in the offices areas. Lighting sensors detect occupancy using ultrasonic and/or infrared sensors. For most spaces, we recommend lighting controls use dual technology sensors, which can eliminate the possibility of any lights turning off unexpectedly. Lighting systems are enabled when an occupant is detected. Fixtures are automatically turned off after an area has been vacant for a preset period. Some controls also provide dimming options and all modern occupancy controls can be easily over-ridden by room occupants to allow them to manually turn fixtures on or off, as desired. Energy savings results from only operating lighting systems when they are required.

Occupancy sensors may be mounted on the wall at existing switch locations, mounted on the ceiling, or in remote locations. In general, wall switch replacement sensors are recommended for single occupant offices and other small rooms. Ceiling-mounted or remote mounted sensors are used in locations without local switching or where wall switches are not in the line-of-sight of the main work area and in large spaces. We recommend a comprehensive approach to lighting design that upgrades both the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.

4.1.3 Gas-Fired Heating System Replacements

Our recommendations for gas-fired heating system replacements are summarized in Figure 18 below.

Figure 18 - Summary of Gas-Fired Heating Replacement ECMs

Energy Conservation Measure		Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)	Estimated Net Cost ($)	Simple Payback Period (yrs)	CO_2e Emissions Reduction (lbs)
Gas Heating (HVAC/Process) Replacement		**0**	**0.0**	**11.7**	**$158.16**	**$1,789.79**	**$0.00**	**$1,789.79**	**11.3**	**1,370**
ECM 4	Install High Efficiency Unit Heaters	0	0.0	11.7	$158.16	$1,789.79	$0.00	$1,789.79	11.3	1,370

Summary of Measure Economics

Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings ($)	Estimated Install Cost ($)	Estimated Incentive ($)	Estimated Net Cost ($)	Simple Payback Period (yrs)	CO_2e Emissions Reduction (lbs)
0	0.0	11.7	$158.16	$1,789.79	$0.00	$1,789.79	11.3	1,370

Measure Description

We recommend replacing existing standard gas-fired, warm air unit heaters with high efficiency gas-fired unit heaters. Improved combustion technology and heat exchanger design optimize the heat recovery from the combustion gases which can significantly improve unit heater efficiency. Savings result from improved system efficiency.

5 ENERGY EFFICIENT PRACTICES

In addition to the quantifiable savings estimated in Section 4, a facility's energy performance can also be improved through application of many low cost or no-cost energy efficiency strategies. By employing certain behavioral and operational changes and performing routine maintenance on building systems, equipment lifetime can be extended; occupant comfort, health and safety can be improved; and energy and O&M costs can be reduced. The recommendations below are provided as a framework for developing a whole building maintenance plan that is customized to your facility. Consult with qualified equipment specialists for details on proper maintenance and system operation.

Reduce Air Leakage

Air leakage, or infiltration, occurs when outside air enters a building uncontrollably through cracks and openings. Properly sealing such cracks and openings can significantly reduce heating and cooling costs, improve building durability, and create a healthier indoor environment. This includes caulking or installing weather stripping around leaky doors and windows allowing for better control of indoor air quality through controlled ventilation.

Use Fans to Reduce Cooling Load

Utilizing ceiling fans to supplement cooling is a low-cost strategy to reduce cooling load considerably. Thermostat settings can be increased by 4°F with no change in overall occupant comfort when the wind chill effect of moving air is employed for cooling.

6 On-Site Generation Measures

On-site generation measure options include both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) on-site technologies that generate power to meet all or a portion of the electric energy needs of a facility, often repurposing any waste heat where applicable. Also referred to as distributed generation, these systems contribute to Greenhouse Gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, resulting in the electric system reliability through improved transmission and distribution system utilization.

The State of New Jersey's Energy Master Plan (EMP) encourages new distributed generation of all forms and specifically focuses on expanding use of combined heat and power (CHP) by reducing financial, regulatory and technical barriers and identifying opportunities for new entries. The EMP also outlines a goal of 70% of the State's electrical needs to be met by renewable sources by 2050.

Preliminary screenings were performed to determine the potential that a generation project could provide a cost-effective solution for your facility. Before deciding to implement, a feasibility study should be conducted that would take a detailed look at existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.

6.1 Photovoltaic

Sunlight can be converted into electricity using photovoltaics (PV) modules. Modules are racked together into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is interconnected to the facility's electrical distribution system. The amount of unobstructed area available determines how large of a solar array can be installed. The size of the array combined with the orientation, tilt, and shading elements determines the energy produced.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has a Low potential for installing a PV array.

In order to be cost-effective, a solar PV array needs certain minimum criteria, such as flat or south-facing rooftop or other unshaded space on which to place the PV panels. In our opinion, the facility does appear not meet these minimum criteria for cost-effective PV installation.

Figure 19 - Photovoltaic Screening

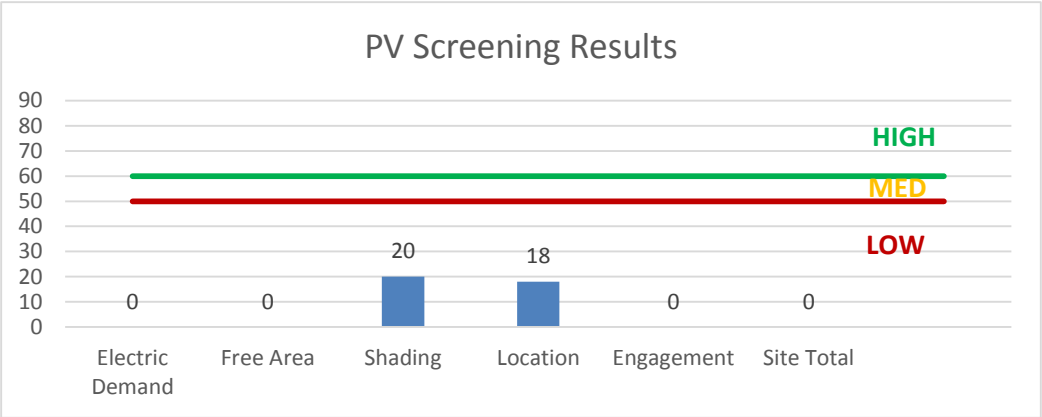

For more information on solar PV technology and commercial solar markets in New Jersey, or to find a qualified solar installer, who can provide a more detailed assessment of the specific costs and benefits of solar develop of the site, please visit the following links below:

- **Basic Info on Solar PV in NJ**: http://www.njcleanenergy.com/whysolar
- **NJ Solar Market FAQs**: http://www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs
- **Approved Solar Installers in the NJ Market**: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1

6.2 Combined Heat and Power

Combined heat and power (CHP) is the on-site generation of electricity along with the recovery of heat energy, which is put to beneficial use. Common technologies for CHP include reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines. Electric generation from a CHP system is typically interconnected to local power distribution systems. Heat is recovered from exhaust and ancillary cooling systems and interconnected to the existing hot water (or steam) distribution systems.

CHP systems are typically used to produce a portion of the electric power used onsite by a facility, with the balance of electric power needs supplied by grid purchases. The heat is used to supplement (or supplant) existing boilers for space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling. The key criteria used for screening, however, is the amount of time the system operates at full load and the facility's ability to use the recovered heat. Facilities with continuous use for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has a Low potential for installing a cost-effective CHP system.

Low or infrequent thermal load is the most significant factor contributing to the potential for CHP at the site. In our opinion, the facility does not appear to meet the minimum requirements for a cost-effective CHP installation.

For a list of qualified firms in New Jersey specializing in commercial CHP cost assessment and installation, go to: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/.

Figure 20 - Combined Heat and Power Screening

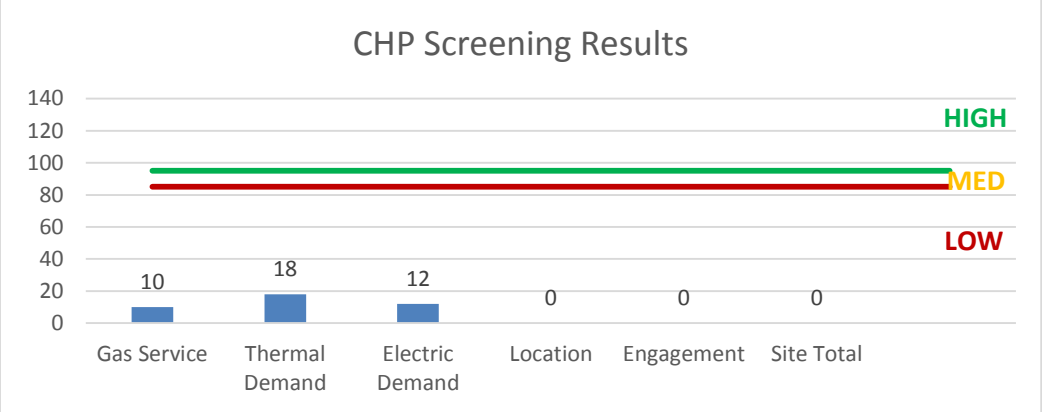

7 DEMAND RESPONSE

Demand Response (DR) is a program designed to reduce the electric load of commercial facilities when electric wholesale prices are high or when the reliability of the electric grid is threatened due to peak demand. Demand Response service providers (a.k.a. Curtailment Service Providers) are registered with PJM, the independent system operator (ISO) for mid-Atlantic state region that is charged with maintaining electric grid reliability.

By enabling grid operators to call upon Curtailment Service Providers and commercial facilities to reduce electric usage during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment Service Providers provide regular payments to medium and large consumers of electric power for their participation in DR programs. Program participation is voluntary and participants receive payments whether or not their facility is called upon to curtail their electric usage.

Typically, an electric customer needs to be capable of reducing their electric demand, within minutes, by at least 100 kW or more in order to participate in a DR program. Customers with a greater capability to quickly curtail their demand during peak hours will receive higher payments. Customers with back-up generators onsite may also receive additional DR payments for their generating capacity if they agree to run the generators for grid support when called upon. Eligible customers who have chosen to participate in a DR programs often find it to be a valuable source of revenue for their facility because the payments can significantly offset annual electric costs.

Participating customers can often quickly reduce their peak load through simple measures, such as temporarily raising temperature set points on thermostats, so that air conditioning units run less frequently, or agreeing to dim or shut off less critical lighting. This usually requires some level of building automation and controls capability to ensure rapid load reduction during a DR curtailment event. DR program participants may need to install smart meters or may need to also sub-meter larger energy-using equipment, such as chillers, to demonstrate compliance with DR program requirements.

DR does not include the reduction of electricity consumption based on normal operating practice or behavior. For example, if a company's normal schedule is to close for a holiday, the reduction of electricity due to this closure or scaled-back operation is not considered a demand response activity in most situations.

The first step toward participation in a DR program is to contact a Curtailment Service Provider. A list of these providers is available on PJM's website and it includes contact information for each company, as well as the states where they have active business (http://www.pjm.com/markets-and-operations/demand-response/csps.aspx). PJM also posts training materials that are developed for program members interested in specific rules and requirements regarding DR activity (http://www.pjm.com/training/training%20material.aspx), along with a variety of other DR program information.

Curtailment Service Providers typically offer free assessments to determine a facility's eligibility to participate in a DR program. They will provide details regarding program rules and requirements for metering and controls, assess a facility's ability to temporarily reduce electric load, and provide details on payments to be expected for participation in the program. Providers usually offer multiple options for DR to larger facilities and may also install controls or remote monitoring equipment of their own to help ensure compliance with all terms and conditions of a DR contract.

In our opinion, this building is not a good candidate for Demand Response Program.

8 PROJECT FUNDING / INCENTIVES

The NJCEP is able to provide the incentive programs described below, and other benefits to ratepayers, because of the Societal Benefits Charge (SBC) Fund. The SBC was created by the State of New Jersey's Electricity Restructuring Law (1999), which requires all customers of investor-owned electric and gas utilities to pay a surcharge on their monthly energy bills. As a customer of a state-regulated electric or gas utility and therefore a contributor to the fund your organization is eligible to participate in the LGEA program and also eligible to receive incentive payment for qualifying energy efficiency measures. Also available through the NJBPU are some alternative financing programs described later in this section. Please refer to Figure 21 for a list of the eligible programs identified for each recommended ECM.

Figure 21 - ECM Incentive Program Eligibility

Energy Conservation Measure		SmartStart Prescriptive	Direct Install
ECM 1	Install LED Fixtures	x	x
ECM 2	Retrofit Fixtures with LED Lamps	x	x
ECM 3	Install Occupancy Sensor Lighting Controls	x	x
ECM 4	Install High Efficiency Unit Heaters		x

SmartStart is generally well-suited for implementation of individual measures or small group of measures. It provides flexibility to install measures at your own pace using in-house staff or a preferred contractor. Direct Install caters to small to mid-size facilities that can bundle multiple ECMs together. This can greatly simplify participation and may lead to higher incentive amounts, but requires the use of pre-approved contractors.

Generally, the incentive values provided throughout the report assume the SmartStart program is utilized because it provides a consistent basis for comparison of available incentives for various measures, though in many cases incentive amounts may be higher through participation in other programs.

Brief descriptions of all relevant financing and incentive programs are located in the sections below. Further information, including most current program availability, requirements, and incentive levels can be found at: www.njcleanenergy.com/ci.

8.1 SmartStart

Overview

The SmartStart program offers incentives for installing prescriptive and custom energy efficiency measures at your facility. Routinely the program adds, removes or modifies incentives from year to year for various energy efficiency equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting
Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Most equipment sizes and types are served by this program. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades.

Incentives

The SmartStart prescriptive incentive program provides fixed incentives for specific energy efficiency measures, whereas the custom SmartStart program provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentive offerings for specific devices.

Since your facility is an existing building, only the retrofit incentives have been applied in this report. Custom Measure incentives are calculated at $0.16/kWh and $1.60/therm based on estimated annual savings, capped at 50% of the total installed incremental project cost, or a project cost buy down to a one year payback (whichever is less. Program incentives are capped at $500,000 per electric account and $500,000 per natural gas account, per fiscal year.

How to Participate

To participate in the SmartStart program you will need to submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. Applicants may work with a contractor of their choosing and can also utilize internal personnel, which provides added flexibility to the program. Using internal personnel also helps improve the economics of the ECM by reducing the labor cost that is included in the tables in this report.

Detailed program descriptions, instructions for applying and applications can be found at: www.njcleanenergy.com/SSB.

8.2 Direct Install

Overview

Direct Install is a turnkey program available to existing small to medium-sized facilities with a peak electric demand that does not exceed 200 kW for any recent 12-month period. You will work directly with a pre-approved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures, up to $125,000 per project. Direct Install participants will also be held to a fiscal year cap of $250,000 per entity.

How to Participate

To participate in the Direct Install program, you will need to contact the participating contractor who the region of the state where your facility is located. A complete list of Direct Install program partners is provided on the Direct Install website linked below. The contractor will be paid the measure incentives directly by the program which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Since Direct Install offers a free assessment of eligible measures, Direct Install is also available to small businesses and other commercial facilities too that may not be eligible for the more detailed facility audits provided by LGEA.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI.

8.3 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) is an alternate method for New Jersey's government agencies to finance the implementation of energy conservation measures. An ESIP is a type of "performance contract," whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. This is done in a manner that ensures that annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive in year one, and every year thereafter. ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs can be leveraged to help further reduce the total project cost of eligible measures.

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

(1) Use an Energy Services Company or "ESCO."
(2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
(3) Use a hybrid approach of the two options described above where the ESCO is utilized for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the Energy Savings Plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Entities should carefully consider all alternatives to develop an approach that best meets their needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP.

Please note that ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you may utilize NJCEP incentive programs to help further reduce costs when developing the ESP. You should refer to the ESIP guidelines at the link above for further information and guidance on next steps.

9 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

9.1 Retail Electric Supply Options

In 1999, New Jersey State Legislature passed the Electric Discount & Energy Competition Act (EDECA) to restructure the electric power industry in New Jersey. This law deregulated the retail electric markets, allowing all consumers to shop for service from competitive electric suppliers. The intent was to create a more competitive market for electric power supply in New Jersey. As a result, utilities were allowed to charge Cost of Service and customers were given the ability to choose a third party (i.e. non-utility) energy supplier.

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for your facility's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third party supplier, consider shopping for a reduced rate from third party electric suppliers. If your facility is purchasing electricity from a third party supplier, review and compare prices at the end of the current contract or every couple years.

A list of third party electric suppliers, who are licensed by the state to provide service in New Jersey, can be found online at: www.state.nj.us/bpu/commercial/shopping.html.

9.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey has also been deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate on a monthly basis. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier is typically dependent upon whether a customer seeks budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility is not purchasing natural gas from a third party supplier, consider shopping for a reduced rate from third party natural gas suppliers. If your facility is purchasing natural gas from a third party supplier, review and compare prices at the end of the current contract or every couple years.

A list of third party natural gas suppliers, who are licensed by the state to provide service in New Jersey, can be found online at: www.state.nj.us/bpu/commercial/shopping.html.

Appendix A: Equipment Inventory & Recommendations

Lighting Inventory & Recommendations

	Existing Conditions					Proposed Conditions							Energy Impact & Financial Analysis						
Location	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Garage	24	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	2,640	Relamp	No	24	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,640	0.55	2,091	0.0	$270.38	$1,404.00	$240.00	4.31
Office	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	62	2,640	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	1,848	0.06	233	0.0	$30.18	$233.00	$20.00	7.06
Office	1	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	114	2,640	Relamp	Yes	1	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	1,848	0.05	205	0.0	$26.56	$211.13	$20.00	7.20
Wall packs	4	High-Pressure Sodium: (1) 200W Lamp	Wall Switch	250	4,380	Fixture Replacement	No	4	LED - Fixtures: Outdoor Wall-Mounted Area Fixture	Wall Switch	75	4,380	0.51	3,250	0.0	$420.26	$1,562.71	$400.00	2.77

Motor Inventory & Recommendations

		Existing Conditions						Proposed Conditions				Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application	HP Per Motor	Full Load Efficiency	VFD Control?	Annual Operating Hours	Install High Efficiency Motors?	Full Load Efficiency	Install VFDs?	Number of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Maintenance garage	Workshop	3	Supply Fan	0.3	60.0%	No	2,745	No	60.0%	No		0.00	0	0.0	$0.00	$0.00	$0.00	0.00

Electric HVAC Inventory & Recommendations

		Existing Conditions				Proposed Conditions							Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (kBtu/hr)	Install High Efficiency System?	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (kBtu/hr)	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Install Dual Enthalpy Economizer?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Office	Office	1	Window AC	0.42		No							No	0.00	0	0.0	$0.00	$0.00	$0.00	0.00
Office	Office	1	Window AC	1.00		No							No	0.00	0	0.0	$0.00	$0.00	$0.00	0.00

Fuel Heating Inventory & Recommendations

		Existing Conditions			Proposed Conditions						Energy Impact & Financial Analysis						
Location	Area(s)/System(s) Served	System Quantity	System Type	Output Capacity per Unit (MBh)	Install High Efficiency System?	System Quantity	System Type	Output Capacity per Unit (MBh)	Heating Efficiency	Heating Efficiency Units	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Maintenance garage	Workshop	3	Warm Air Unit Heater	61.25	Yes	1	Warm Air Unit Heater	61.25	93.00%	Et	0.00	0	11.7	$158.16	$1,789.79	$0.00	11.32

Plug Load Inventory

	Existing Conditions			
Location	Quantity	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified?
Maintenance Garage	3	Computer	145.0	Yes
Maintenance Garage	2	Microwave	900.0	Yes
Maintenance Garage	1	Refrigerator	218.0	Yes
Maintenance Garage	3	Power drills	500.0	No
Maintenance Garage	1	Coffee machine	400.0	Yes

Appendix B: ENERGY STAR® Statement of Energy Performance

ENERGY STAR® Statement of Energy Performance

LEARN MORE AT energystar.gov

N/A

ENERGY STAR® Score[1]

Jackson Township BOE Maintenance Building

Primary Property Type: Other - Services
Gross Floor Area (ft²): 4,800
Built: 1979

For Year Ending: December 31, 2016
Date Generated: March 28, 2018

1. The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.

Property & Contact Information

Property Address	Property Owner	Primary Contact
Jackson Township BOE Maintenance Building 151 Don Connor Boulevard Jackson, New Jersey 08527	Jackson Township BOE 151 Don Connor Boulevard Jackson, NJ 08527 (732) 833-4600	Michelle Richardson 151 Don Connor Boulevard Jackson, NJ 08527 (732) 833-4600 sstewart@trcsolutions.com

Property ID: 3080416

Energy Consumption and Energy Use Intensity (EUI)

Site EUI
95.5 kBtu/ft²

Source EUI
135 kBtu/ft²

Annual Energy by Fuel	
Electric - Grid (kBtu)	79,800 (17%)
Natural Gas (kBtu)	378,675 (83%)

National Median Comparison	
National Median Site EUI (kBtu/ft²)	71
National Median Source EUI (kBtu/ft²)	100.4
% Diff from National Median Source EUI	34%
Annual Emissions	
Greenhouse Gas Emissions (Metric Tons CO2e/year)	29

Signature & Stamp of Verifying Professional

I _____ (Name) verify that the above information is true and correct to the best of my knowledge.

Signature: _____ Date: _____

Licensed Professional

____ _____
,
(____)____-_____
_____

Professional Engineer Stamp (if applicable)